



Pricelist

From 01-01-2026



- ✉ info@kempmachines.com
- ☎ +31 (0) 30 638 47 42
- ✉ Oudwulfseweg 9, 3992 LT Houten
- 🌐 www.kempmachines.com



Cell Phone number:

Jacco Kemp +31 (0)6-48687318

Terms of delivery:

- We deliver according to Metaalunie conditions. These are send on request.

Per expedition:

- Transportation costs on request.

The following applies to everything:

- No rights are derived from the prices in the printed booklets, the digital price list is always leading, see www.kempmachines.com/prices
- Subject to changes and printing errors.

Table of contents

| | |
|----------------------------------------------------------------------------------|----|
| (VBE) Single Silage Pusher..... | 7 |
| (VBES) Single Silage pusher fixed..... | 8 |
| (DVB) Double Silage pusher | 9 |
| (VVB) Silage pusher adjustable | 10 |
| (RVSA) Rubber feed scraper on the back..... | 11 |
| (RVS) Rubber feed scraper (painted) | 12 |
| (RVS) Rubber feed scraper (galvanised) | 13 |
| (RVSXL) Rubber feed scraper XL | 14 |
| (RVSM) Rubber feed scraper Mini Mechanical | 15 |
| (RVSM) Rubber feed scraper mechanical | 16 |
| (RVSV) Rubber feed scraper V-shape..... | 17 |
| (RSVB) Rubber bucket scraper | 18 |
| (RVSOKB) Rubber feed scraper with two brushes..... | 19 |
| (RSVOKBD) Fixed rubber scraper with two brushes | 20 |
| (RSVOKBZ) Fixed rubber scraper with one adjustable brush | 21 |
| (KSLR) Silage scraper left and right | 22 |
| (KSV) Silage scraper fixed..... | 23 |
| (KSDW) Silage scraper pushing model..... | 24 |
| (KSD) Silage scraper rotatable | 25 |
| (RVSKS) Rubber feed- and silage scraper..... | 26 |
| (RSVKS) Fixed rubber scraper (light version) | 27 |
| (RSVKL) Fixed rubber scraper (heavy version) | 28 |
| (RSVKD) Fixed rubber scraper with extra volume | 29 |
| (RSVKSLI) Fixed rubber scraper with forklift receiver..... | 30 |
| (RSVKLLI) Fixed rubber scraper with forklift receiver | 31 |
| (RSVKLI) Fixed rubber scraper with forklift receiver + excavator attachment..... | 32 |
| (URSK) Fixed rubber scraper 3-point | 33 |
| (RMS) Manure scraper | 34 |
| (RMSHV) Rubber scraper adjustable angles | 35 |
| (TenWM) Yard scraper mechanical 140 series | 36 |
| (TenWS) Yard scraper hydraulic..... | 37 |
| (TenWL) Heavy yard scraper hydraulic..... | 38 |

| | |
|-------------------------------------------------------|----|
| (TenWXL) Yard scraper hydraulic XL..... | 39 |
| (TenWK) Heavy yard scraper hydraulic short model..... | 40 |
| (BKM) Bale clamp mini..... | 41 |
| (BK) Light bale clamp | 42 |
| (BKS) Bale clamp standard | 43 |
| (BKC) Bale clamp compact | 44 |
| (BKZ) Bale clamp heavy..... | 45 |
| (BKZXL) Bale clamp XL..... | 46 |
| (BKGK) Bale clamp with large clamping range..... | 47 |
| (BKROM) Round Bale clamp mini | 48 |
| (BKROL) Light round Bale clamp | 49 |
| (BKRO) Round Bale clamp..... | 50 |
| (BKROZ) Heavy round bale clamp..... | 51 |
| (BD) Bale transporter..... | 52 |
| (BSN) Bale Cutter | 53 |
| (BP) Bale spike | 54 |
| (STK) Straw Clamp..... | 55 |
| (BBP) Roadside bale spike..... | 56 |
| (MS) Maize leveller | 57 |
| (SVL) Silage Fork light version | 58 |
| (SVZ) Silage Fork heavy version | 58 |
| (FRH) Film Roll Holder | 59 |
| (SK) Tube hitching system..... | 60 |
| (DSV) Deep litter rake | 61 |
| (DSVZ) Deep litter rake heavy | 62 |
| (DSVA) Deep litter rake powered | 63 |
| (OKB) Weed brush | 64 |
| (OKBD) Weed brush Duo | 67 |
| (OKBT) Weed brush Triple | 68 |
| (SRS) Stone fork | 69 |
| (ADAPTE) Adapter Attachment > Euro | 70 |
| (ADAPT3) Adapter Attachment > CAT-2 | 70 |
| (ADAPT) Attachment > Attachment..... | 71 |
| (MT) Machine Transporter | 72 |

| | |
|----------------------------------------------------|----|
| (MTLI) Machine Transporter forklift receiver | 73 |
| Rubbers | 74 |
| Attachment parts | 75 |



(VBE) Single Silage Pusher

Left and right operating by a double operating cylinder.


- Due to the special construction, the wheel is always rotating.
- It is possible to block the wheel so that the residual feed can be moved.
- Including wheel (assembled).
- Can be delivered with weld-on parts for (mini)shovel a.s.
- VBEZ robust design with two cylinders and two pivot points.
- Weight VBE: \pm 200 kg.
- Weight VBEZ: \pm 275 kg.

For more information:

https://www.kempmachines.com/silage-pushers/single-silage-pusher?_return=/silage-pushers

| | Types | Description | Price |
|---|--------------|------------------------------------------------|--------------|
| ➤ | VBE3 | Inclusive 3-point frame | € 1.400,- |
| ➤ | VBE | With the possibility to mount attachment parts | € 1.450,- |
| ➤ | VBEZ | Heavy version | € 1.800,- |

For attachment parts see pages 61-65.

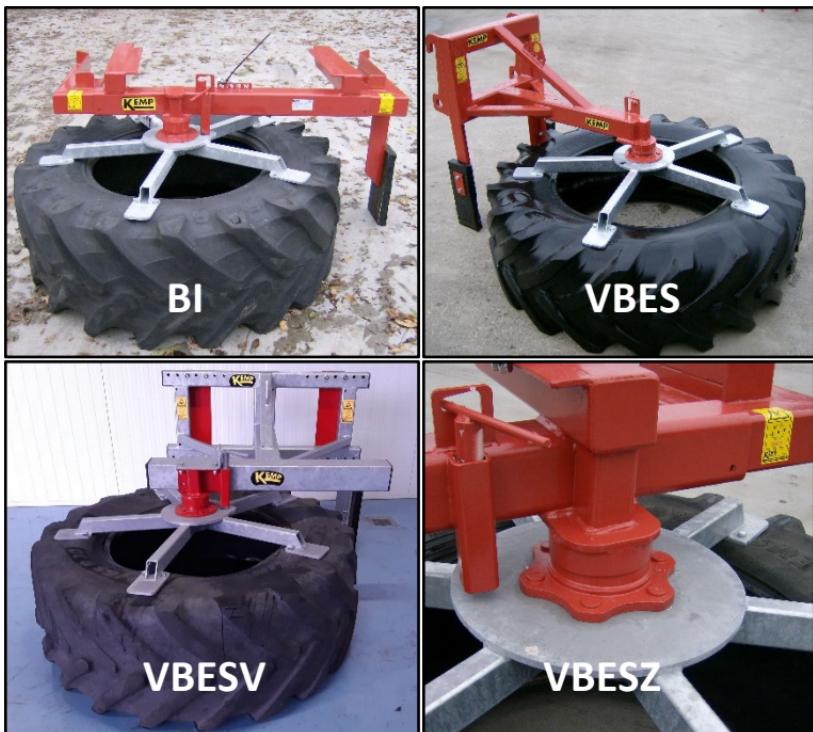

(VBES) Single Silage pusher fixed

Perfect to use with small mini shovels, max. 1.200 mm.

- Easy to hitch with quick lock.
- Including wheel (assembled).
- The wheel can be blocked to move the residual feed
- Delivered with a rubber support leg, not necessary to retract a support leg.
- No hydraulic hoses needed.
- Also available left or right operating to use for wider vehicles.

For further information:

https://www.kempmachines.com/silage-pushers/single-silage-pusher-fixed?_return=/silage-pushers

| | Types | Description | Price |
|---|--------------|-----------------------------------------------------------------------------------------|-----------|
| ➤ | VBES | Without Attachment parts | € 1.050,- |
| ➤ | VBESV | Galvanised and adjustable wheel, excluding attachments, but with plates for attachments | € 1.200,- |
| ➤ | VBESZ | Heavier version (6 holes wheel hub and 6 spoke construction.) | € 1.325,- |

| | Options | Description | Price |
|---|-----------|-----------------------------------------|---------|
| ➤ | BI | Bucket connection including steel angle | € 375,- |

For attachment parts see pages 61-65.



(DVB) Double Silage pusher

Quick connect to shovel, telehandler, front end loader or feeder.

- No modifications to the bucket.
- Due to the special construction, the wheel is always rotating.
- It is possible to block the wheel, so the residual feed can be moved.
- Can be delivered with mounting parts and three-point connection.
- Standard delivery with adjustable bucket width.
- No maintenance due to the wheel hub construction.
- Weight DVB: \pm 320 kg. Including wheels (assembled).
- Optional: DVBZ - heavier version, 6 holes wheel hub and 6 spoke construction. Main tube 8mm instead of 4mm, side tubes 6mm instead of 4mm.
- Weight DVBZ: \pm 500 kg. Including wheels (assembled).

For further information:

https://www.kempmachines.com/silage-pushers/double-silage-pusher?_return=/silage-pushers

| | Types | Description | Price |
|---|---------------|--------------------------------------------------------------------------|-----------|
| ➤ | DVBBI | With bucket connection | € 1.675,- |
| ➤ | DVB | Without Bucket input, but prepared for attachment parts | € 1.600,- |
| ➤ | DVBZBI | Heavier version with bucket input | € 2.100,- |
| ➤ | DVBZ | Heavier version without bucket input, but prepared for Attachment parts. | € 2.025,- |

| | Options | Description | Price |
|---|--------------|------------------------------------------------------------|---------|
| ➤ | DVBM | Custom made for fork bucket | € 225,- |
| ➤ | HK | Steel angle to clamp with the top clamp of the bucket | € 175,- |
| ➤ | DVBB | Adjustable tube for bucket with cutting plate | € 350,- |
| ➤ | DVBAL | Bucket connection and prepared for attachment parts | € 400,- |

When ordering, please specify bucket width and width of the vehicle towards the dimensions of the wheels.

For **attachment parts** see pages 61-65.



VVBD + DVBA



Hub



VVBE



VVBD + DVBA

(VVB) Silage pusher adjustable

Quick connect to shovel, telehandler, front end loader or feeder.

- No modifications to the bucket.
- Due to the special construction, the wheel is always rotating.
- It is possible to block the wheel the residual feed can be moved.
- Standard delivery with adjustable bucket width.
- No maintenance due to the wheel hub construction.
- Weight VVBD: ± 380 kg. Including wheels (assembled).
- Removable wheel hubs adjustable in width; necessary if wider wheels are fitted later.
- Completely galvanised
- Available with 1 wheel (VVBE) or with 2 wheels (VVBD).

For further information:

https://www.kempmachines.com/silage-pushers/silage-pusher-adjustable?_return=/silage-pushers

| | Types | Description | Price |
|---|--------------|----------------------------------------|--------------|
| ➤ | VVBE | Single pusher, left or right operating | € 1.750,- |
| ➤ | VVBD | Double Silage pusher | € 2.000,- |

| | Options | Description | Price |
|---|----------------|-----------------------------------------------------------------------------|--------------|
| ➤ | HK | Steel angle to clamp with the top clamp of the bucket | € 175,- |
| ➤ | DVBB | Adjustable tube for bucket with cutting plate | € 350,- |
| ➤ | DVBA | DVBV with preparation for attachment parts and forklift receiver (200*80*6) | € 450,- |

When ordering, please specify bucket width and width of the vehicle towards the dimensions of the wheels.

For **attachment parts** see pages 61-65.



(RVSA) Rubber feed scraper on the back

Multifunctional rubber feed scraper can be moved feed, mud or manure.

- Both sides hydraulic movable due to the 2 cylinders with 1 double-acting function.
- Due to the large swing angle, it is not possible that the feed stack.
- Solid construction with heavy pivot with Teflon coated bushes.
- Adjustable angles(optional).
- Weight \pm 325 kg.
- Delivered with Cat. 2 mounting parts.

For further information:

<https://www.kempmachines.com/rubber-scrapers/rubber-feed-scaper-on-the-rear?return=/rubber-scrapers>

| | Types | Rubber | Price |
|---|-----------------|---------------------|-----------|
| ➤ | RVSA2844 | 2.800 x 400 x 40 mm | € 2.475,- |
| ➤ | RVSA2855 | 2.800 x 500 x 50 mm | € 2.625,- |
| ➤ | RVSA3244 | 3.200 x 400 x 40 mm | € 2.575,- |
| ➤ | RVSA3255 | 3.200 x 500 x 50 mm | € 2.775,- |

| | Options | Description | Price |
|---|------------|-----------------------------------------------------------|---------|
| ➤ | VH | Adjustable angles (manually) | € 200,- |
| ➤ | VHV | Extra rubber strengthening (only with adjustable angles). | € 125,- |
| ➤ | SV | Shock valve for impact protection | € 125,- |

Also available with forklift fork connection or accord.

For attachment parts see pages 61-65,



(RVS) Rubber feed scraper (painted)

- Can swivel both left and right 70°, due to 2 cylinders. Because of this the feed won't accumulate and it is possible to swivel while driving.
- The rubber strip can oscillate relative to the mounting frame for good ground adaptation and uniform wear of the rubber.
- Heavy pivot point with Teflon coated bushings.
- Comes with galvanised bar.
- Available in 5 widths and 2 types.

For further information:


https://www.kempmachines.com/rubber-scrapers/rubber-feed-scaper-standard?_return=/rubber-scrapers

| RVSABM | RVSAB |
|-------------------------------|-------------------------------|
| For vehicles up to ± 2.000 kg | For vehicles up to ± 6.000 kg |
| Vehicles up to 1.600 mm width | Vehicles up to 2.600 mm width |
| Weight ± 225 kg | Weight ± 340 kg |
| Cylinders: 25*40*300 | Cylinders: 35*50*350 |

| | Types | Rubber | Price |
|---|-------------------|---------------------|-----------|
| ➤ | RVSABM1844 | 1.800 x 400 x 40 mm | € 1.850,- |
| ➤ | RVSABM2244 | 2.200 x 400 x 40 mm | € 1.925,- |
| ➤ | RVSABM2544 | 2.500 x 400 x 40 mm | € 2.050,- |
| ➤ | RVSAB2555 | 2.500 x 500 x 50 mm | € 2.425,- |
| ➤ | RVSAB2855 | 2.800 x 500 x 50 mm | € 2.550,- |
| ➤ | RVSAB3255 | 3.200 x 500 x 50 mm | € 2.675,- |

| | Options | Description | Price |
|---|------------|-----------------------------------------------------------|---------|
| ➤ | VH | Adjustable angles by hand | € 200,- |
| ➤ | VHV | Extra rubber strengthening (only with adjustable angles). | € 125,- |
| ➤ | SV | Shock valve for impact protection | € 125,- |
| ➤ | GT | Pilot operating non-return valve | € 125,- |
| ➤ | SM | Throttle valve to control slewing | € 100,- |

For attachment parts see pages 61-65.

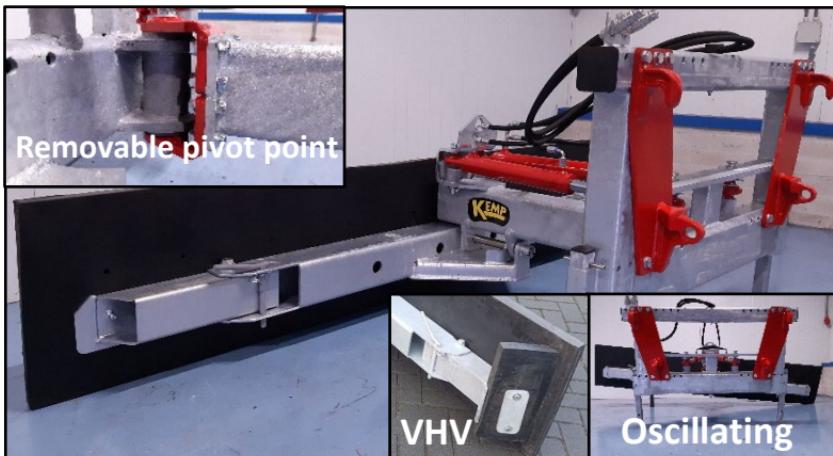

(RVS) Rubber feed scraper (galvanised)

- Can swivel both left and right 70°, due to 2 cylinders. Because of this the feed won't accumulate and it is possible to swivel while driving.
- The rubber strip can oscillate relative to the mounting frame for good ground adaptation and uniform wear of the rubber.
- Heavy pivot point with Teflon coated bushings.
- Middle part of the bar behind the rubber is 140*140*8 mm.
- Available in 5 widths and 2 types

For further information:


https://www.kempmachines.com/rubber-scrapers/galvanised-rubber-feed-scraper?_return=/rubber-scrapers

| RVSS | RVSL |
|-------------------------------|-------------------------------|
| For vehicles up to ± 2.000 kg | For vehicles up to ± 6.000 kg |
| Vehicles up to 1.600 mm width | Vehicles up to 2.600 mm width |
| Weight ± 260 kg | Weight ± 360 kg |
| Cylinders: 25*40*300 | Cylinders: 35*50*350 |

| | Types | Rubber | Price |
|---|-----------------|---------------------|-----------|
| ➤ | RVSS1844 | 1.800 x 400 x 40 mm | € 2.075,- |
| ➤ | RVSS2244 | 2.200 x 400 x 40 mm | € 2.125,- |
| ➤ | RVSS2544 | 2.500 x 400 x 40 mm | € 2.250,- |
| ➤ | RVSL2555 | 2.500 x 500 x 50 mm | € 2.725,- |
| ➤ | RVSL2855 | 2.800 x 500 x 50 mm | € 2.825,- |
| ➤ | RVSL3255 | 3.200 x 500 x 50 mm | € 2.975,- |

| | Options | Description | Price |
|---|------------|-----------------------------------------------------------|---------|
| ➤ | VH | Adjustable angles (manually) | € 200,- |
| ➤ | VHV | Extra rubber strengthening (only with adjustable angles). | € 125,- |
| ➤ | SV | Shock valve for impact protection | € 125,- |
| ➤ | GT | Pilot operating non-return valve | € 125,- |
| ➤ | SM | Throttle valve to control slewing | € 100,- |

For attachment parts see pages 61-65.

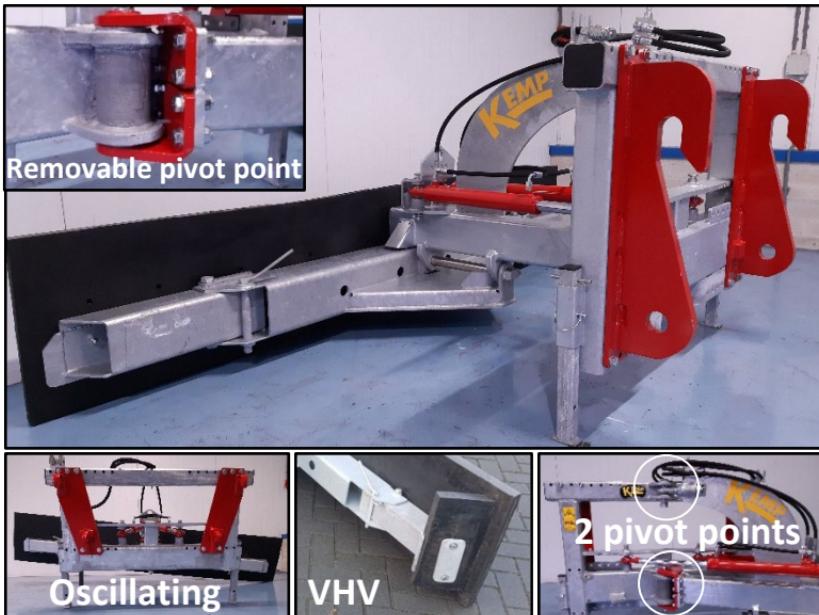

(RVSXL) Rubber feed scraper XL

Heavy design for intense heavy scraping work..

- Can swivel both left and right 70°, due to 2 cylinders. Because of this the feed won't accumulate and it is possible to swivel while driving.
- The rubber strip can oscillate relative to the mounting frame for good ground adaptation and uniform wear of the rubber.
- Heavy pivot point with Teflon coated bushings.
- Due to the second pivot point, the power is equally distributed.
- Additional pivot point above for support and extra strength.
- Middle part of the bar behind the rubber is 180*180*8 mm.
- Standard equipped with extra rubber strengthening at the sides. (VHV).
- Standard equipped with a shock valve.
- Weight RVSXL2855: 485 kg.


For further information:

<https://www.kempmachines.com/rubber-scrapers/heavy-rubber-feed-scaper?return=/rubber-scrapers>

| Types | Rubber | Price |
|--------------------|-------------------------------------------------|-----------|
| ➤ RVSXL2855 | 2.800 x 500 x 50 mm | € 3.500,- |
| ➤ RVSXL3255 | 3.200 x 500 x 50 mm | € 3.575,- |
| ➤ RVSXL3455 | 3.400 x 500 x 50 mm (Only by adjustable angles) | € 3.950,- |
| ➤ RVSXL3855 | 3.800 x 500 x 50 mm (Only by adjustable angles) | € 4.100,- |

| Options | Description | Price |
|----------------|--------------------------------------|---------|
| ➤ VH180 | Adjustable angles (manually) + (VHV) | € 300,- |
| ➤ GT | Pilot operating non-return valve | € 125,- |
| ➤ SM | Throttle valve to control slewing | € 100,- |

For attachment parts see pages 61-65.

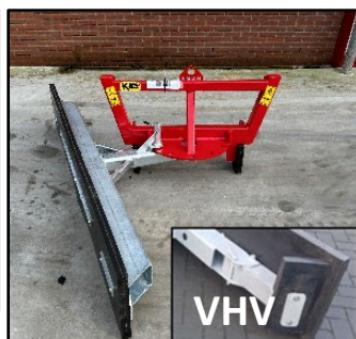

(RVSMM) Rubber feed scraper Mini Mechanical

Perfect to work with mini loader, skid steer loader or forklift truck up to ± 2.000 kg and max. 1.600 mm vehicle width.

- Quick connect to quick coupler or bucket with top clamp or forklift receiver.
- Due to a swing angle of 70°, the feed won't accumulate.
- In the feed scrape position, the scraper will hit a stop on the left and the right, so does not need to be blocked (can be).
- For straight scraping forward and two intermediate positions, can be blocked with spring pin.
- The rubber strip can oscillate relative to the mounting frame for good ground adaptation and uniform wear of the rubber.

For further information:

https://www.kempmachines.com/rubber-scrapers/mechanical-rubber-feed-scaper?_return=/rubber-scrapers

| Types | Rubber | Price |
|--------------------|---------------------|-----------|
| ➤ RVSMM1844 | 1.800 x 400 x 40 mm | € 1.500,- |
| ➤ RVSMM2244 | 2.200 x 400 x 40 mm | € 1.550,- |
| ➤ RVSMM2544 | 2.500 x 400 x 40 mm | € 1.650,- |

| Options | Description | Price |
|--------------|---------------------------------------------------------|---------|
| ➤ VH | Adjustable angles (manually) | € 200,- |
| ➤ VHV | Extra rubber strengthening (Only by adjustable angles). | € 125,- |
| ➤ BI | Bucket connection with steel angle | € 375,- |
| ➤ DHL | Removable Attachment parts | € 150,- |

For **attachment parts** see pages 61-65.



(RVSM) Rubber feed scraper mechanical

Quick connect, without come of the tractor, to loader, telehandler, or front end loader bucket with top clamp.

- No modifications to the bucket.
- Not necessary to connect hydraulic hoses
- Possibility to set in 5 positions without cylinders and lockable.
- Including steel angle to fix to the silage bucket. Also possible to deliver with build-on parts.
- **Pay attention!** The frame MUST BE fixed in the bucket with the top clamp, to avoid run out of the bucket. Also possible to deliver with build on parts.
- Weight ± 425 kg.


For further information:

https://www.kempmachines.com/rubber-scrapers/mechanical-rubber-feed-scrapers?_return=/rubber-scrapers

| | Types | Rubber | Price |
|---|-----------------|---------------------|-----------|
| ➤ | RVSM2855 | 2.800 x 500 x 50 mm | € 2.700,- |
| ➤ | RVSM3255 | 3.200 x 500 x 50 mm | € 2.825,- |

| | Options | Description | Price |
|---|---------------|-----------------------------------------------------------------------------------|---------|
| ➤ | VH | Adjustable angles (manually) | € 200,- |
| ➤ | RVSMBI | Bucket connection + steel angle | € 300,- |
| ➤ | DVBB | Adjustable hollow sections for clamping the scraper to buckets with cutting knife | € 350,- |

For attachment parts see pages 61-65.

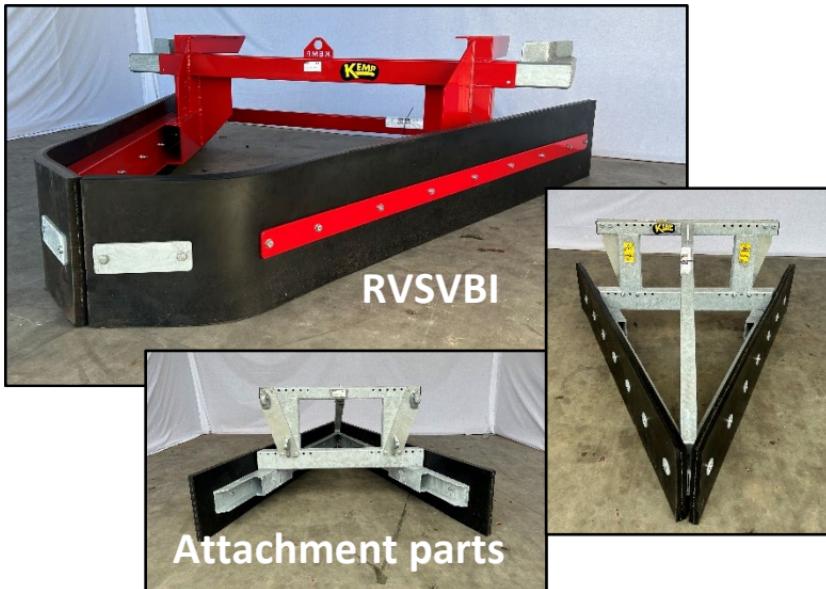

(RVSV) Rubber feed scraper V-shape

Quick connect to shovel, telehandler, front end loader or ground bucket.

- Deliverable with bucket connection and attachments parts.
- Strong and stable rubber scraper to scrape quickly a lot of feed.
- No modifications to the bucket needed.
- Weight 1.800 mm ± 200 kg.
- Weight 2.800 mm ± 390 kg.
- Types to 2.000 mm have an UNP140 profile behind the rubber. The two heavier types an UNP200.
- Types RVSV1600 – RVSV2000 are completely galvanised.
- Types RVSV2400 and RVSV2800 are painted.

For further information:

<https://www.kempmachines.com/rubber-scrapers/fixed-feed-scaper?return=/rubber-scrapers>

| | Types | Description | Price |
|---|-----------------|-------------------------------------------------|-----------|
| ➤ | RVSV1600 | Outside dimension 1.600 mm | € 1.450,- |
| ➤ | RVSV1800 | Outside dimension 1.800 mm | € 1.550,- |
| ➤ | RVSV2000 | Outside dimension 2.000 mm | € 1.600,- |
| ➤ | RVSV2400 | Outside dimension 2.400 mm (heavier version) | € 1.925,- |
| ➤ | RVSV2800 | Outside dimension 2.800 mm (heavier version) | € 2.075,- |

| | Options | Description | Price |
|---|---------------|-------------------------------------|---------|
| ➤ | RVSVBI | Bucket connection | € 300,- |
| ➤ | HK | Steel angle to clamp with top clamp | € 175,- |
| ➤ | DVBM | Custom fork bucket | € 225,- |

For **attachment parts** see pages 61-65.



(RSVB) Rubber bucket scraper

Quick connection to telehandler, front end loader or ground bucket.

RSVBS/RSVBL: Hollow sections 140*140*6. Bucket insert 4 mm.

- Weight ± 280 kg.

RSVBXL: Hollow sections 180*180*8. Bucket insert 8 mm and 6 mm.

- Rubber strengthening at the end of the hollow sections.
- Weight ± 440 kg.

For further information:

https://www.kempmachines.com/rubber-scrapers/rubber-bucket-scraper?_return=/rubber-scrapers

| | Types | Rubber | Working width | Price |
|---|-------------------|------------------|---------------|-----------|
| ➤ | RSVBS1844 | 1.800 x 400 x 40 | 2.050 | € 1.125,- |
| ➤ | RSVBS2244 | 2.200 x 400 x 40 | 2.050 | € 1.200,- |
| ➤ | RSVBS2544 | 2.500 x 400 x 40 | 2.350 | € 1.275,- |
| ➤ | RSVBL2844 | 2.800 x 400 x 40 | 2.600 | € 1.550,- |
| ➤ | RSVBL2855 | 2.800 x 500 x 50 | 2.600 | € 1.675,- |
| ➤ | RSVBL3244 | 3.200 x 400 x 40 | 3.000 | € 1.625,- |
| ➤ | RSVBL3255 | 3.200 x 500 x 50 | 3.000 | € 1.775,- |
| ➤ | RSVBXL2855 | 2.800 x 500 x 50 | 2.600 | € 2.175,- |
| ➤ | RSVBXL3255 | 3.200 x 500 x 50 | 3.000 | € 2.300,- |
| ➤ | RSVBXL3455 | 3.400 x 500 x 50 | 3.200 | € 2.425,- |
| ➤ | RSVBXL3855 | 3.800 x 500 x 50 | 3.600 | € 2.550,- |

| | Options | Description | Price |
|---|-------------|-----------------------------------------------------------------------------------|---------|
| ➤ | HK | Steel angle to clamp with top of bucket | € 175,- |
| ➤ | DVBB | Adjustable hollow sections for clamping the scraper to buckets with cutting knife | € 350,- |

Pay attention! The bucket must be at least 250 mm narrower than the working width due to the side hollow sections and backlash.

When ordering, please specify bucket width.



(RVSOKB) Rubber feed scraper with two brushes

Due to the two brushes it is possible to clean the feeding alley more intensively, even below the feeding rack.

- In a goat shed, for example, where hygiene is very important, this slide with brushes can provide labour relief.
- The brushes are mounted on the galvanised rubber feed scraper.
- With one double-acting valve it is possible move the brushes up and down and to rotate the brushes.
- The brushes are made of nylon and have a diameter of 750 mm. These brushes consist of 20 individual elements that are replaceable (see option LPNYV).
- An 1.000 mm brush is also possible on request.

For further information:

kempmachines.com

| | Types | Description | Price |
|---|-------------------|----------------------------------------------------------------------------------|-----------|
| ➤ | RVSOKB2244 | RVSL2244 including adjustable angles, 2 nd pivot point and 2 brushes. | € 5.650,- |
| ➤ | RVSOKB2555 | RVSL2555 including adjustable angles, 2 nd pivot point and 2 brushes. | € 5.800,- |
| ➤ | RVSOKB2855 | RVSL2855 including adjustable angles, 2 nd pivot point and 2 brushes. | € 5.900,- |

| | Options | Description | Price |
|---|--------------|---------------------------------------------------------------------------------------------------|----------|
| ➤ | 6/2 | With a double-acting valve, choice is between swivelling and rotating. | € 350,- |
| ➤ | 8/3 | With a double-acting valve, choice is between swivelling and operating the brushes independently. | € 475,- |
| ➤ | LPNYV | Individual elements for the LPNYV750 | € 5,50,- |

For attachment parts see pages 61-65.



(RSVOKBD) Fixed rubber scraper with two brushes

Due to the two brushes it is possible to scrape and clean the yard or feeding alley more intensively. The dirt is automatically turned inwards and then remains against the rubber.

- The brushes are mounted on the fixed rubber scraper (RSVKS).
- With one double-acting valve it is possible move the brushes up and down and to rotate the brushes.
- Other possibilities on consultation.
- The brushes are made of nylon and have a diameter of 750 mm. These brushes consist of 20 individual elements that are replaceable (see option LPNYV).
- An 1.000 mm brush is also possible on request.
- Price exclusive attachment parts.

For further information:

kempmachines.com

| | Types | Description | Price |
|---|--------------------|--------------------------|--------------|
| ➤ | RSVOKBD2544 | Mounted on the RSVKS2544 | € 4.250,- |
| ➤ | RSVOKBD2844 | Mounted on the RSVKS2844 | € 4.325,- |

| | Options | Description | Price |
|---|----------------|-------------------------------------------------------------------------------------------------|--------------|
| ➤ | 6/2 | With a double-acting valve, choice is between rotating and operating the brushes independently. | € 350,- |
| ➤ | LPNYV | Individual elements for the LBNYV750 | € 5,50,- |

For **attachment parts** see pages 61-65.



(RSVOKBZ) Fixed rubber scraper with one adjustable brush

Due to (hydraulically) adjustable brush to scrape and clean the yard or feeding alley more intensively.

- The brush is mounted on the fixed rubber scraper (RSVKS).
- Other possibilities on consultation.
- The brushes are made of nylon and have a diameter of 750 mm. These brushes consist of 20 individual elements that are replaceable. (See option LPNYV).
- An 1.000 mm brush is possible on request.

For further information:

kempmachines.com

| | Types | Description | Price |
|---|--------------------|--------------------------|-----------|
| ➤ | RSVOKBZ2244 | Mounted on the RSVKS2244 | € 3.625,- |
| ➤ | RSVOKBZ2544 | Mounted on the RSVKS2544 | € 3.700,- |
| ➤ | RSVOKBZ2844 | Mounted on the RSVKS2844 | € 3.775,- |

| | Options | Description | Price |
|---|--------------|-----------------------------------------------------------------------------------------------------------|----------|
| ➤ | 6/2 | With two double-acting valves, choice is between swivelling and moving the brushes up and down. | € 350,- |
| ➤ | 8/3 | With one double-acting valve, choice is between swivelling, rotating, and moving the brushes up and down. | € 475,- |
| ➤ | LPNYV | Individual elements for the LBNYV750 | € 5,50,- |



(KSLR) Silage scraper left and right

- Includes a rubber strip, so that the covering sheet isn't damaged.
- The slewing is hydraulically by means a double-acting cylinder.
- Because the silage scraper slew at the front, it is possible to scrape in little spaces and when you are not perpendicular to the silage.
- The pivot point is consists of 2 rotary buses which are positioned far from each other, to be able to take up a lot of strength.
- Equipped with a pressure relief valve.

For further information:

https://www.kempmachines.com/rubber-scrapers/silage-scraper-left-and-right-hydraulic?_return=/rubber-scrapers

| | Types | Working width (centre vehicle to end) | Price |
|---|------------------|---------------------------------------|-----------|
| ➤ | KSLRS3500 | 3.500 mm (light version) | € 3.050,- |
| ➤ | KSLRL3500 | 3.500 mm (heavy version) | € 3.450,- |
| ➤ | KSLRL4000 | 4.000 mm (heavy version) | € 3.550,- |

For attachment parts see pages 61-65.



(KSV) Silage scraper fixed

- The KSVS (light version): suitable for mini-loaders, is made of tube 140x140x7 mm and the rubber is 1.000 mm long.
 - Weight 3.500 mm ± 225 kg.
 - Work width 3.000 and 3.500 mm.
- De KSVL (heavy version): suitable for larger loaders, are made of tube 180x180x8 mm and the rubber is 1,400 mm long.
 - Weight ± 325 kg.
 - Work width 3.500 and 4.000 mm.


For further information:

<https://www.kempmachines.com/rubber-scrapers/silage-scraper-fixed?return=/rubber-scrapers>

| | Types | Working width (Centre vehicle to end) | Price |
|---|-----------------|---------------------------------------|-----------|
| ➤ | KSVS3000 | 3.000 mm | € 1.625,- |
| ➤ | KSVS3500 | 3.500 mm | € 1.675,- |
| ➤ | KSVL3500 | 3.500 mm | € 2.125,- |
| ➤ | KSVL4000 | 4.000 mm | € 2.175,- |

For left and right use, attachment parts are calculated twice.

For **attachment parts** see pages 61-65.



(KSDW) Silage scraper pushing model

With this scraper, the sand can be shove and also pushed to the side.

- Left and right slewable with two heavy cylinders with pressure relief valves.
- Delivered with rubber strip without steel-reinforced braid.
- Can also be used as grounds scraper to keep the yard mud and snow-free.
- Available in 2 versions: S for mini shovels and L for larger shovels, tractors, and telehandlers.
- Available with all attachments for (mini)loader, telehandler, and tractor.
- Price exclusive attachment parts.

For further information:

https://www.kempmachines.com/rubber-scrapers/silage-scraperpushing-model?_return=/rubber-scrapers

| | Types | Description | Price |
|---|--------------|---------------------------------------------------|-----------|
| ➤ | KSDWS | Length : 1.600 mm Rubber : 2.200 x 400 x 40 mm | € 1.950,- |
| ➤ | KSDWL | Length : 2.000 mm Rubber : 2.800 x 500 x 50 mm | € 2.625,- |

For attachment parts see pages 61-65.



(KSD) Silage scraper rotatable

This silage slide is designed to push up the sand on the silage.


Machine can be used without dismounting.

- Pivot point is 2 x 90° rotatable, allowing pushing at any angle of the silage.
- Available in 2 versions: the **(KSDS)** for mini shovels and the **(KSDL)** for larger shovels, tractors and telehandlers.
- Available with all attachments for (mini) shovels, tractors and telehandlers.

For further information:

| Types | Description | Price |
|-------------|-------------------------------------------------------------|--------------|
| KSDS | Length : 1.600 mm width of sliding board: 1.000 x 500 mm | € 1.725,- |
| KSDL | Length : 2.200 mm width of sliding board: 1.600 x 700 mm | € 2.325,- |
| KSDH | Hydraulic pivotable scraper | Upon request |

For attachment parts see pages 61-65.

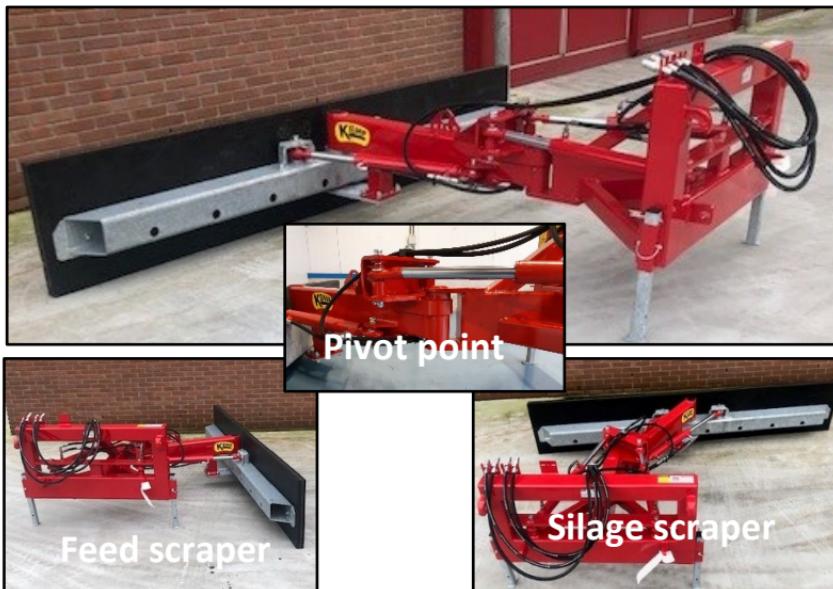

(RVSKS) Rubber feed- and silage scraper

The all scraper. With this scraper; feed can be pulled up, the sand is pushed out of the silage, or moved. And muddy yards and snow can be removed.

- Equipped with 2 pivot points and 4 cylinders, therefore the scraper has a swing angle of 70°.
- The front cylinders are to scrape the yard and sand from the silage and the rear cylinders to scrape the feed. The scraper comes beside the tractor.
- When scraping the silage, it is possible to move the scraper out of the centre by the double pivots. Hereby it is possible to clean the silage further.
- The rubber can move relative to the frame for optimum ground adaptation and uniform wear of the rubber.
- Price exclusive attachment parts.
- The types RVSKS2244 and RVSKS2544 are standard equipped with the option VH.

For further information:

https://www.kempmachines.com/rubber-scrapers/rubber-feed--and-silage-scraper?_return=/rubber-scrapers

| Types | Rubber | Price |
|---------------------|---------------------|-----------|
| ➤ RVSKS2244 | 2.200 x 400 x 40 mm | € 2.925,- |
| ➤ RVSKS2544 | 2.500 x 400 x 40 mm | € 2.975,- |
| ➤ RVSKSL2855 | 2.800 x 500 x 50 mm | € 3.175,- |

| | Options | Description | Price |
|----------------|-------------------------------------------------------------|-------------|-------|
| ➤ VH | Adjustable angles | € 200,- | |
| ➤ SV | Shock valve for impact protection (2x) | € 250,- | |
| ➤ GT | Pilot operating non-return valve (2x) | € 125,- | |
| ➤ 3-WEG | 3-way ball valve (at one double-acting function on vehicle) | € 150,- | |
| ➤ 6/2 | Electrical 6/2 hydraulic valve | € 350,- | |

For attachment parts see pages 61-65,



(RSVKS) Fixed rubber scraper (light version)

Perfect for moving food residues, mud, manure, snow and similar.

- Available with mounting parts for (mini) shovels and tractors, telehandlers, forklifts, cranes and others.
- Delivered with a rubber support leg, not necessary to retract a support leg. Without coming of the tractor, hitch on and off.
- Completely galvanised.
- The bar behind the rubber is hollow sections 140*140*6 mm.
- Weight RSVKS2844 ± 200 kg

For further information:

https://www.kempmachines.com/rubber-scrapers/heavy-fixed-rubber-scaper?_return=/rubber-scrapers

| | Types | Rubber height | Working width | Full rubber | Steel inlay |
|---|------------------|---------------|---------------|-------------|-------------|
| ➤ | RSVKS1444 | 400 mm | 1.300 mm | € 1.100,- | ----- |
| ➤ | RSVKS1443 | 400 mm | 1.300 mm | ----- | € 1.150,- |
| ➤ | RSVKS1844 | 400 mm | 1.650 mm | € 1.125,- | ----- |
| ➤ | RSVKS1843 | 400 mm | 1.650 mm | ----- | € 1.175,- |
| ➤ | RSVKS2244 | 400 mm | 2.050 mm | € 1.175,- | ----- |
| ➤ | RSVKS2243 | 400 mm | 2.050 mm | ----- | € 1.225,- |
| ➤ | RSVKS2544 | 400 mm | 2.350 mm | € 1.225,- | ----- |
| ➤ | RSVKS2543 | 400 mm | 2.350 mm | ----- | € 1.275,- |
| ➤ | RSVKS2844 | 400 mm | 2.600 mm | € 1.275,- | ----- |
| ➤ | RSVKS2843 | 400 mm | 2.600 mm | ----- | € 1.325,- |
| ➤ | RSVKS2855 | 500 mm | 2.650 mm | € 1.400,- | ----- |
| ➤ | RSVKS2853 | 500 mm | 2.650 mm | ----- | € 1.400,- |
| ➤ | RSVKS3043 | 400 mm | 2.850 mm | ----- | € 1.375,- |
| ➤ | RSVKS3053 | 500 mm | 2.850 mm | ----- | € 1.475,- |
| ➤ | RSVKS3244 | 400 mm | 3.050 mm | € 1.350,- | ----- |
| ➤ | RSVKS3243 | 400 mm | 3.050 mm | ----- | € 1.425,- |
| ➤ | RSVKS3255 | 500 mm | 3.050 mm | € 1.500,- | ----- |
| ➤ | RSVKS3253 | 500 mm | 3.050 mm | ----- | € 1.575,- |

For attachment parts see pages 61-65.



(RSVKL) Fixed rubber scraper (heavy version)

Perfect for moving food residues, mud, manure, snow, recycling waste, chips and similar.

- Without come of the tractor, hitch on and off. Delivered with a rubber support leg, not necessary to retract a support leg.
- Available with mounting parts for (mini) shovels and tractors, telehandlers, forklifts, cranes and others.
- Every version is deliverable with full rubber and rubber with steel reinforced braid.
- The bar behind the rubber is a hollow sections of 180*180*8 mm.
- Weight RSVKL3855 – 430 kg.
- Completely galvanised.
- Surcharge for rubber with double steel insert RSVKL3453: €550,-
- Surcharge for rubber with double steel insert RSVKL3855: €625,-

For further information:

<https://www.kempmachines.com/rubber-scrapers/heavy-fixed-rubber-scaper?return=/rubber-scrapers>

| | Types | Rubber length | Working width | Full rubber | Steel inlay |
|---|------------------|---------------|---------------|-------------|-------------|
| ➤ | RSVKL2555 | 500 | 2.350 mm | € 1.775,- | ----- |
| ➤ | RSVKL2553 | 500 | 2.350 mm | ----- | € 1.775,- |
| ➤ | RSVKL2855 | 500 | 2.600 mm | € 1.875,- | ----- |
| ➤ | RSVKL2853 | 500 | 2.600 mm | ----- | € 1.875,- |
| ➤ | RSVKL3053 | 500 | 2.850 mm | ----- | € 1.925,- |
| ➤ | RSVKL3255 | 500 | 3.050 mm | € 1.950,- | ----- |
| ➤ | RSVKL3255 | 500 | 3.050 mm | ----- | € 1.975,- |
| ➤ | RSVKL3455 | 500 | 3.200 mm | € 2.075,- | ----- |
| ➤ | RSVKL3453 | 500 | 3.200 mm | ----- | € 2.150,- |
| ➤ | RSVKL3855 | 500 | 3.600 mm | € 2.225,- | ----- |
| ➤ | RSVKL3853 | 500 | 3.600 mm | ----- | € 2.325,- |

For attachment parts see pages 61-65.



(RSVKD) Fixed rubber scraper with extra volume

The RSVKD is basically comparable to the RSVK, only it has an extra kink in the bar, which generates even more volume.

- Easily to connect and disconnect to the quick coupler, without getting off.
- Weight RSVKSD2844 ± 200 kg

For further information:

https://www.kempmachines.com/agriculture/rubber-fixed-scraper-with-extra-volume--rsvkd-?_return=/agriculture

| | Types | Rubber length | Working width | Full rubber | Steel inlay |
|---|-------------------|---------------|---------------|-------------|-------------|
| ➤ | RSVKSD2244 | 400 mm | 1.800 mm | € 1.325,- | ----- |
| ➤ | RSVKSD2243 | 400 mm | 1.800 mm | ----- | € 1.375,- |
| ➤ | RSVKSD2844 | 400 mm | 2.350 mm | € 1.425,- | ----- |
| ➤ | RSVKSD2843 | 400 mm | 2.350 mm | ----- | € 1.475,- |
| ➤ | RSVKSD2855 | 500 mm | 2.350 mm | € 1.550,- | ----- |
| ➤ | RSVKSD2853 | 500 mm | 2.350 mm | ----- | € 1.550,- |
| ➤ | RSVKSD3244 | 400 mm | 2.750 mm | € 1.500,- | ----- |
| ➤ | RSVKSD3243 | 400 mm | 2.750 mm | ----- | € 1.575,- |
| ➤ | RSVKSD3255 | 500 mm | 2.750 mm | € 1.650,- | ----- |
| ➤ | RSVKSD3253 | 500 mm | 2.750 mm | ----- | € 1.725,- |
| ➤ | RSVKLD3855 | 500 mm | 3.100 mm | € 2.425,- | ----- |
| ➤ | RSVKLD3853 | 500 mm | 3.100 mm | ----- | € 2.525,- |

For attachment parts see pages 61-65.



(RSVKSLI) Fixed rubber scraper with forklift receiver

Fixed rubber scraper equipped with forklift receiver.

- The bar behind the rubber is 140*140*6 mm.
- Standard delivered with forklift receiver. The hollow sections are 200*80*6 mm, length of the tubes 800 mm.
- Completely galvanised.

For further information:

| | Types | Rubber height | Working width | Full rubber | Steel inlay |
|---|---------------------|---------------|---------------|-------------|-------------|
| ➤ | RSVKSLI 1444 | 400 mm | 1.300 mm | € 1.000,- | ----- |
| ➤ | RSVKSLI 1443 | 400 mm | 1.300 mm | ----- | € 1.050,- |
| ➤ | RSVKSLI 1844 | 400 mm | 1.650 mm | € 1.025,- | ----- |
| ➤ | RSVKSLI 1843 | 400 mm | 1.650 mm | ----- | € 1.075,- |
| ➤ | RSVKSLI 2244 | 400 mm | 2.050 mm | € 1.075,- | ----- |
| ➤ | RSVKSLI 2243 | 400 mm | 2.050 mm | ----- | € 1.125,- |
| ➤ | RSVKSLI 2544 | 400 mm | 2.350 mm | € 1.125,- | ----- |
| ➤ | RSVKSLI 2543 | 400 mm | 2.350 mm | ----- | € 1.175,- |
| ➤ | RSVKSLI 2844 | 400 mm | 2.600 mm | € 1.175,- | ----- |
| ➤ | RSVKSLI 2843 | 400 mm | 2.600 mm | ----- | € 1.225,- |
| ➤ | RSVKSLI 2855 | 500 mm | 2.650 mm | € 1.300,- | ----- |
| ➤ | RSVKSLI 2853 | 500 mm | 2.650 mm | ----- | € 1.300,- |
| ➤ | RSVKSLI 3043 | 400 mm | 2.850 mm | ----- | € 1.275,- |
| ➤ | RSVKSLI 3053 | 500 mm | 2.850 mm | ----- | € 1.375,- |
| ➤ | RSVKSLI 3244 | 400 mm | 3.050 mm | € 1.250,- | ----- |
| ➤ | RSVKSLI 3243 | 400 mm | 3.050 mm | ----- | € 1.325,- |
| ➤ | RSVKSLI 3255 | 500 mm | 3.050 mm | € 1.400,- | ----- |
| ➤ | RSVKSLI 3253 | 500 mm | 3.050 mm | ----- | € 1.475,- |

| | Options | Description | Price |
|---|--------------|---------------------------------------------------------------------------------|---------|
| ➤ | LIAKS | Forklift receiver (length 500 mm) + prepared for attachment parts light version | € 400,- |



(RSVKLLI) Fixed rubber scraper with forklift receiver

Fixed rubber scraper equipped with forklift receiver.

- The bar behind the rubber is 180*180*8 mm.
- Standard delivered with forklift receiver. The hollow sections are 200*100*8 mm, length of the tubes 800 mm.
- Completely galvanised.

For further information:

https://www.kempmachines.com/agriculture/heavy--fixed-rubber-scaper-for-forklift--rsvkli-?_return=/agriculture

| | Types | Rubber height | Working width | Full rubber | Steel inlay |
|---|---------------------|---------------|---------------|-------------|-------------|
| ➤ | RSVKLLI 2555 | 500 mm | 2.350 mm | € 1.575,- | ----- |
| ➤ | RSVKLLI 2553 | 500 mm | 2.350 mm | ----- | € 1.575,- |
| ➤ | RSVKLLI 2855 | 500 mm | 2.600 mm | € 1.675,- | ----- |
| ➤ | RSVKLLI 2853 | 500 mm | 2.600 mm | ----- | € 1.675,- |
| ➤ | RSVKLLI 3053 | 500 mm | 2.850 mm | ----- | € 1.725,- |
| ➤ | RSVKLLI 3255 | 500 mm | 3.050 mm | € 1.775,- | ----- |
| ➤ | RSVKLLI 3253 | 500 mm | 3.050 mm | ----- | € 1.825,- |
| ➤ | RSVKLLI 3455 | 500 mm | 3.200 mm | € 1.900,- | ----- |
| ➤ | RSVKLLI 3453 | 500 mm | 3.200 mm | ----- | € 1.975,- |
| ➤ | RSVKLLI 3855 | 500 mm | 3.600 mm | € 2.050,- | ----- |
| ➤ | RSVKLLI 3853 | 500 mm | 3.600 mm | ----- | € 2.150,- |

| | Options | Description | Price |
|---|--------------|---------------------------------------------------------------------------------|---------|
| ➤ | LIAKL | Forklift receiver (length 600 mm) + prepared for attachment parts heavy version | € 550,- |

For attachment parts see pages 61-65.



(RSVKLI) Fixed rubber scraper with forklift receiver + excavator attachment

These rubber scrapers are fitted with forklift receiver + attachment for excavators, when ordering please provide the scraper order code and the attachment order code.

For further information:

| | Types | Rubber-height | Working width | Hollow sections | Rubber with steel inlay |
|---|---------------------|---------------|---------------|-----------------|-------------------------|
| ➤ | RSVKSLI 1843 | 400 mm | 1.650 mm | 140x140x6 | € 1.075,- |
| ➤ | RSVKSLI 2243 | 400 mm | 2.350 mm | 140x140x6 | € 1.125,- |
| ➤ | RSVKSLI 2543 | 500 mm | 2.350 mm | 140x140x6 | € 1.175,- |
| ➤ | RSVKLLI 2553 | 500 mm | 2.600 mm | 180x180x8 | € 1.625,- |
| ➤ | RSVKLLI 2853 | 500 mm | 2.600 mm | 180x180x8 | € 1.725,- |
| ➤ | RSVKLLI 3053 | 500 mm | 2.850 mm | 180x180x8 | € 1.775,- |
| ➤ | RSVKLLI 3253 | 500 mm | 3.050 mm | 180x180x8 | € 1.825,- |

| | Opname | Beschrijving | Prijs |
|---|------------------|------------------------------------------------|---------|
| ➤ | CW-H05 | Forklift receiver + CW-05 hammer attachment | € 200,- |
| ➤ | CW-H10 | Forklift receiver + CW-10 hammer attachment | € 200,- |
| ➤ | CW-H20/30 | Forklift receiver + CW-20/30 hammer attachment | € 300,- |
| ➤ | AEN45 | Forklift receiver + Engcon S45 attachment | € 300,- |
| ➤ | AEN60 | Forklift receiver + Engcon S60 attachment | € 350,- |

For attachment parts see pages 61-65.




(URSK) Fixed rubber scraper 3-point

- Equipped with CAT 1 and 2 and forklift receiver
- Standard rubber with steelinlay (40 cm high)

For further information:

https://www.kempmachines.com/rubber-scrapers/fixed-rubber-scraper-3-point?_return=/rubber-scrapers

| | Types | Rubber | Working width | Price |
|---|-----------------|-----------------|----------------------|--------------|
| ➤ | URSK1800 | 1.800x400x32 mm | 1.650 mm | € 1.250,- |
| ➤ | URSK2200 | 2.200x400x32 mm | 2.050 mm | € 1.300,- |
| ➤ | URSK2500 | 2.500x400x32 mm | 2.350 mm | € 1.350,- |
| ➤ | URSK2800 | 2.800x400x38 mm | 2.600 mm | € 1.400,- |
| ➤ | URSK3000 | 3.000x400x38 mm | 2.850 mm | € 1.525,- |
| ➤ | URSK3200 | 3.200x400x38 mm | 3.050 mm | € 1.575,- |

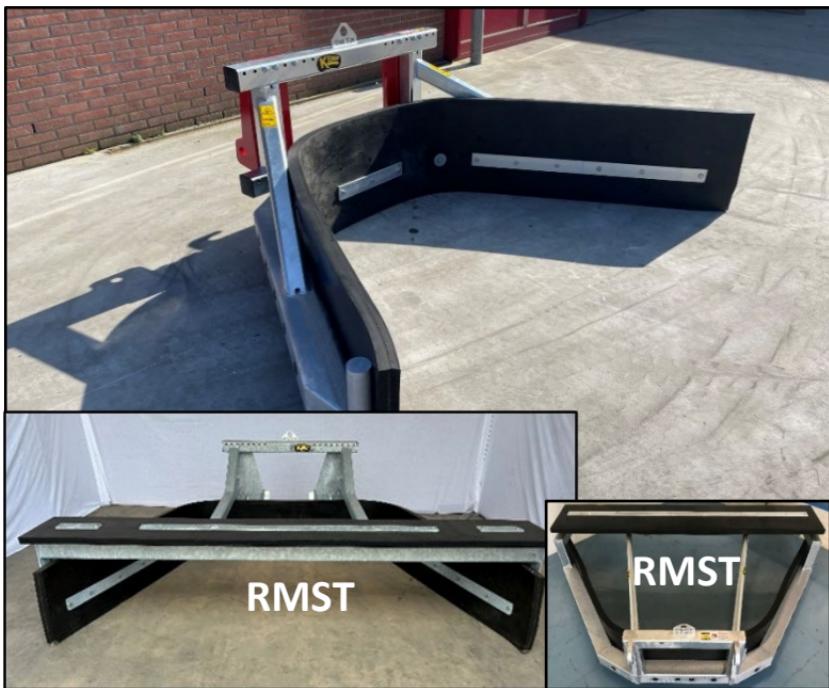

(RMS) Manure scraper

With the manure scraper, manure can be removed from slatted floors.

- The Manure scraper is standard equipped with a buck where the attachment parts are being attached to.
- The manure slide has a rubber that is 500 mm high and 50 mm thick.
- Optional: It is possible to order a rubber slide on top of the manure scraper, which makes it easier to remove the manure along walls.
- Completely galvanised.
- Weight RMS2900 ± 625 kg.

For further information:

<https://www.kempmachines.com/rubber-scrapers/manure-scaper?return=/rubber-scrapers>

| | Types | Working width ± | Price |
|---|----------------|----------------------------|-----------|
| ➤ | RMS2000 | 2.000 mm en depth 1.200 mm | € 2.375,- |
| ➤ | RMS2500 | 2.500 mm en depth 1.350 mm | € 2.575,- |
| ➤ | RMS2900 | 2.900 mm en depth 1.500 mm | € 2.875,- |

| | Options | Description | Price |
|---|-------------|-----------------------|---------|
| ➤ | RMST | Rubber scraper on top | € 950,- |

For **attachment parts** see pages 61-65.



(RMSHV) Rubber scraper adjustable angles


- The Manure scraper is standard equipped with a buck where the attachment parts are being attached to.
- The RMSHVS (light version) is equipped with a rubber of 400 mm high and 40 mm thick.
- The RMSHVL/XL (heavy version) is equipped with a rubber of 500 mm high and 50 mm thick.
- Equipped with hydraulically adjustable corners, this allows you to adjust the width of the slide at any time, thus adapting it to different stables.
- Standard delivered with 4x oil hose.
- Completely galvanised.

For further information:

| Types | Description | Weight | Price |
|-----------|--------------------------------------------------|--------|-----------|
| ➤ RMSHVS | Hydraulic adjustable angles (1.200 tot 2.400 mm) | 325 KG | € 3.425,- |
| ➤ RMSHVL | Hydraulic adjustable angles (1.600 tot 3.500 mm) | 450 KG | € 4.200,- |
| ➤ RMSHVLX | Hydraulic adjustable angles (2.500 tot 5.000 mm) | 650 KG | € 5.300,- |

| Options | Description | Price |
|---------|-----------------------------------------------------------------------------|---------|
| ➤ GLGT | For one double-acting valve: Synchronisation valve and non-return valve. | € 300,- |

For attachment parts see pages 61-65.

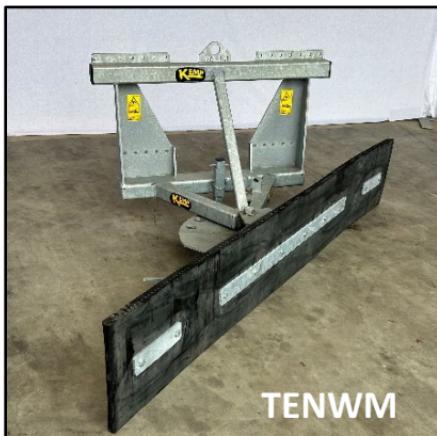

TENWM



45° swivel



Pivot point



TENWMG

(TenWM) Yard scraper mechanical 140 series

(not to scrape feed)

Perfect rubber yard scraper to scrape mud, manure, and snow.

- Delivered with rubber with steel reinforced braid.
- Easy to hitch to the quick coupling, forklift receiver or 3-point.
- The scraper can slew 45° to both sides and can be locked in 5 positions.
- Robust pivot with grease nipple and a locking pin stainless steel.
- Standard equipped with adjustable angles.
- Completely galvanised
- Weight ± 200 kg.
- TenWM is intended for attachment parts.
- TenWG for forklift receiver, hollow sections 200*80 mm and CAT 1 and 2.


For further information:

https://www.kempmachines.com/yard-scrapers/yard-scraper-mechanical?_return=/yard-scrapers

| | Types | Rubber | Price |
|---|------------------|---------------------|--------------|
| ➤ | TENWM1843 | 1.800 x 400 x 32 mm | € 1.550,- |
| ➤ | TENWM2243 | 2.200 x 400 x 32 mm | € 1.625,- |
| ➤ | TENWM2543 | 2.500 x 400 x 32 mm | € 1.675,- |
| ➤ | TENWM2843 | 2.800 x 400 x 32 mm | € 1.750,- |

| | Types | Rubber | Price |
|---|-------------------|---------------------|--------------|
| ➤ | TENWMG2243 | 2.200 x 400 x 32 mm | € 1.575,- |
| ➤ | TENWMG2543 | 2.500 x 400 x 32 mm | € 1.625,- |
| ➤ | TENWMG2843 | 2.800 x 400 x 32 mm | € 1.700,- |

For attachment parts see pages 61-65.

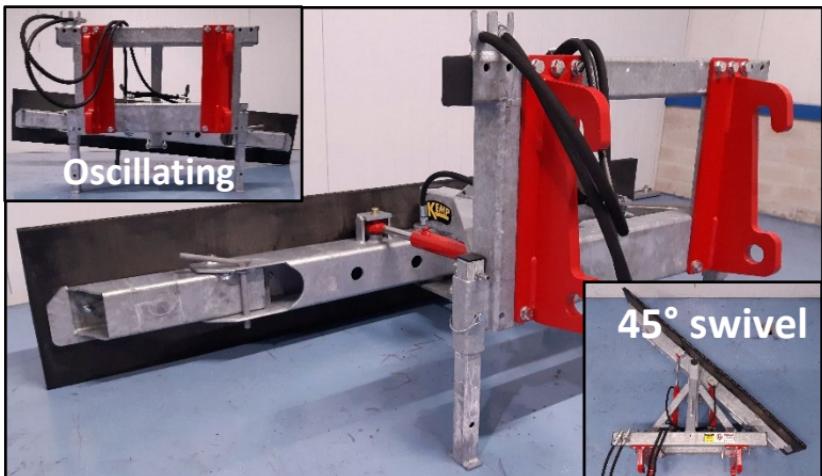

(TenWS) Yard scraper hydraulic

(for vehicles till 2.500 kg)

Perfect rubber yard scraper to scrape mud, manure, and snow.

(standard delivered with rubber with steel reinforced braid).

- The bar with the rubber of the scraper can be tilted relative to the frame, so there is always an optimum ground adaptation and uniform wear of the rubber.
- This scraper can slew 45° to both sides.
- Standard equipped with adjustable angles.
- Complete galvanised.
- Weight TenWS2243 - 225 kg.


For further information:

https://www.kempmachines.com/yard-scrapers/hydraulically-yard-scaper?_return=/yard-scrapers

| | Types | Rubber | Note | Price |
|---|------------------|---------------------|-------------|-----------|
| ➤ | TENWS1843 | 1.800 x 400 x 32 mm | 1 cylinder | € 1.650,- |
| ➤ | TENWS2243 | 2.200 x 400 x 32 mm | 2 cylinders | € 1.800,- |
| ➤ | TENWS2543 | 2.500 x 400 x 32 mm | 2 cylinders | € 1.850,- |
| ➤ | TENWS2843 | 2.800 x 400 x 32 mm | 2 cylinders | € 1.925,- |

| | Options | Description | Price |
|---|-----------------|-----------------------------------------------------------------------------|---------|
| ➤ | GT | When the vehicle has an open centre valve: Pilot operating non-return valve | € 125,- |
| ➤ | SV | Shock valve with 2 cylinders | € 125,- |
| ➤ | 2-CIL | 2 cylinders at 1.800 mm | € 125,- |
| ➤ | TENWS500 | Rubber strip with steel inlay 500 height | € 100,- |
| ➤ | SK650 | Snow cover removable | € 800,- |

For attachment parts see pages 61-65.

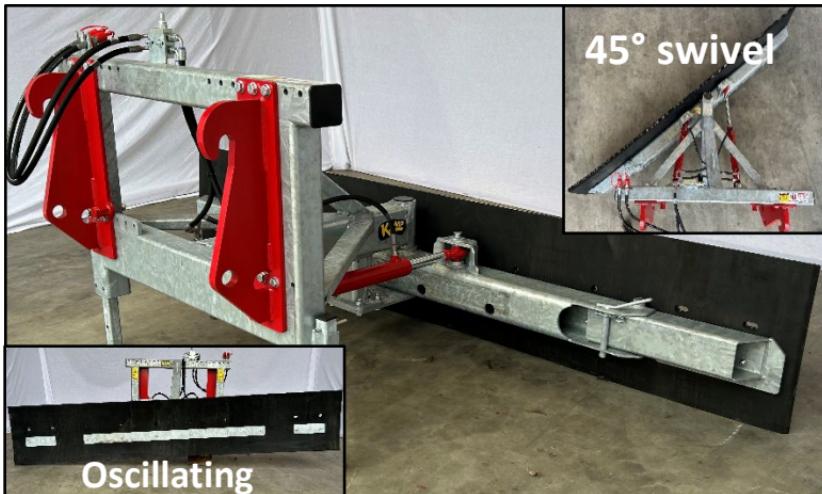

(TenWL) Heavy yard scraper hydraulic

(for vehicles from 2.500 kg)

Rubber scraper to hold your yard and roads clean and free of snow.

- Hydraulic 45° pivotable with 2 double-acting cylinders.
- The bar with the rubber of the scraper can be tilted relative to the frame, so there is always an optimum ground adaptation and uniform wear of the rubber.
- Delivered with rubber strip with steel inlay 500 mm height.
- Complete galvanised.
- Weight ± 325 kg.



For further information:

<https://www.kempmachines.com/yard-scrapers/hydraulically-yard-scaper?return=/yard-scrapers>

| | Types | Rubber | Note | Price |
|---|------------------|------------------|-------------|-----------|
| ➤ | TENWL2853 | 2.800 x 500 x 32 | Adj. angles | € 2.625,- |
| ➤ | TENWL3053 | 3.000 x 500 x 38 | Adj. angles | € 2.825,- |
| ➤ | TENWL3253 | 3.200 x 500 x 38 | Adj. angles | € 2.995,- |

| | Options | Description | Price |
|---|--------------|----------------------------------------------------------|---------|
| ➤ | GT | Pilot operating non-return valve | € 125,- |
| ➤ | SV | Shock valve for impact protection | € 125,- |
| ➤ | SK800 | For snow clearing removable 800mm rubber increasing part | € 950,- |

For **attachment parts** see pages 61-65, Also for 3-point and/or combined with forklift receiver.

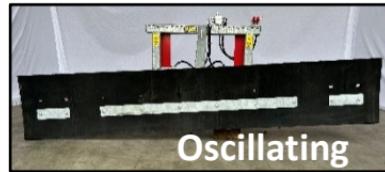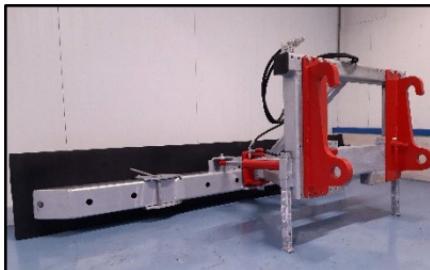

(TenWXL) Yard scraper hydraulic XL

(not to scrape feed)

Rubber scraper to clean your terrain and roads and remove snow.

- Hydraulic 45° pivotable with 2 double-acting cylinders.
- The bar is manufactured out of 180*180*8 mm hollow sections
- Galvanised bar with adjustable angles.
- Rubber strip with steel inlay 500 mm height.
- The 3.400 and 3.800 mm have larger adjustable angles, therefore these two have a larger volume.
- Standard equipped with a shock valve.
- Weight ± 550 kg.

For further information:

https://www.kempmachines.com/yard-scrapers/hydraulically-yard-scaper-heavy?_return=/yard-scrapers

| | Types | Rubber | Note | Price |
|---|-------------------|------------------|-------------|-----------|
| ➤ | TENWXL2853 | 2.800 x 500 x 32 | Adj. angles | € 3.400,- |
| ➤ | TENWXL3053 | 3.000 x 500 x 38 | Adj. angles | € 3.500,- |
| ➤ | TENWXL3253 | 3.200 x 500 x 38 | Adj. angles | € 3.600,- |
| ➤ | TENWXL3453 | 3.400 x 500 x 38 | Adj. angles | € 3.800,- |
| ➤ | TENWXL3853 | 3.800 x 500 x 38 | Adj. angles | € 3.995,- |

| | Options | Description | Price |
|---|----------------|-----------------------------------------------------------------------|-----------|
| ➤ | GT | When vehicle have open centre valve: Pilot operating non return valve | € 125,- |
| ➤ | SK800XL | For snow clearing removable 800mm rubber increasing part | € 1.100,- |

For attachment parts see pages 61-65.



(TenWK) Heavy yard scraper hydraulic short model

Extra short version with 3-point mounting parts.


- The right rubber scraper to clean your terrain and roads and remove snow (only for a front lift).
- Hydraulic 45° pivotable with 2 double-acting cylinders.
- The bar with the rubber of the scraper can be tilted relative to the frame, so there is always an optimum ground adaptation and uniform wear of the rubber.
- Delivered with rubber strip with steel inlay.
- Length of front rubber to centre lifting ball is 750 mm. This is 400 mm shorter than the regular TenW.
- Standard equipped with a shock valve.
- Weight TenWK2753 ± 350 kg.

For further information:

https://www.kempmachines.com/yard-scrapers/hydraulically-yard-scaper-short?_return=/yard-scrapers

| | Types | Rubber | Note | Price |
|---|------------------|------------------|-------------|-----------|
| ➤ | TENWK2853 | 2.800 x 500 x 32 | Adj. angles | € 2.850,- |
| ➤ | TENWK3053 | 3.000 x 500 x 38 | Adj. angles | € 3.050,- |
| ➤ | TENWK3253 | 3.200 x 500 x 38 | Adj. angles | € 3.175,- |

| | Options | Description | Price |
|---|--------------|--------------------------------------------------|---------|
| ➤ | GT | Pilot operating non-return valve | € 125,- |
| ➤ | SK800 | For snow clearing: removable 800mm rubber shield | € 950,- |

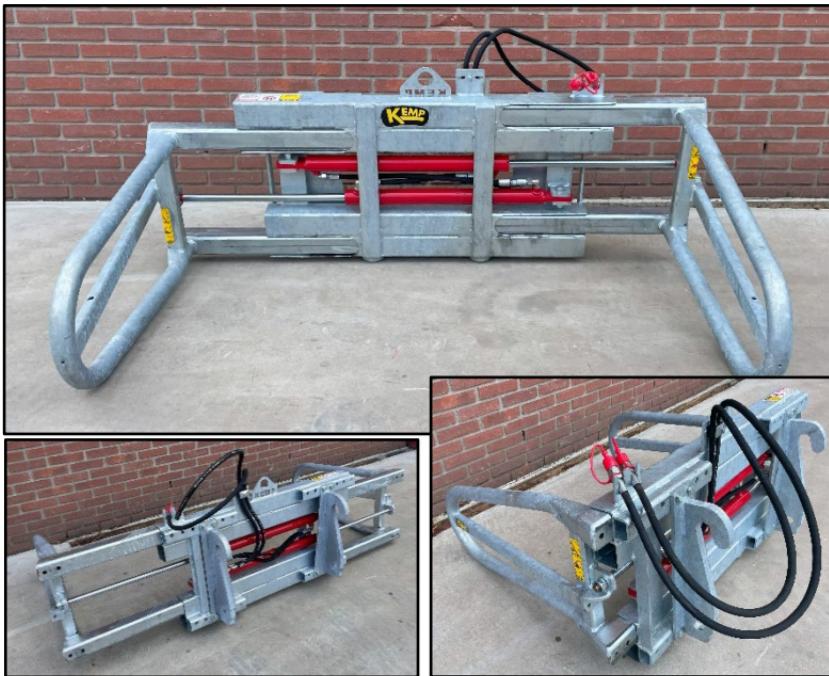

(BKM) Bale clamp mini

A light clamp specially designed for compact tractors and mini shovels.

- Because there is only one bale caught at a time, we were able to construct this grabber light.
- Suitable for round and square bales.
- Working length of clamp arms 800 mm.
- 2 sliding tubes each arm made of 8 mm thick steel 52.
- Clamp tubes made from a single piece of 5 mm thick bent steel.
- Available in two types:
 - BKM1450: Clamping range 450 mm – 1450 mm
 - BKM1900: Clamping range 700 mm – 1900 mm
- Cylinder size is 25 x 40 x 500/600 mm.
- Weight ± 140 kg.
- Price includes hoses and male couplings, but excludes attachments.

| | Types | Clamping range | Price |
|---|----------------|----------------|-----------|
| ➤ | BKM1450 | 450 – 1.450 mm | € 1.675,- |
| ➤ | BKM1900 | 700 – 1.900 mm | € 1.750,- |

| | Options | Description | Price |
|---|-----------|------------------------------------------------------------------------------------------------|---------|
| ➤ | GT | Pilot operating non-return valve (needed at open centre and internal leakage control valve) | € 125,- |
| ➤ | OV | At working pressure above 225 bar, then install a pressure relief valve | € 125,- |

For **attachment parts** see pages 61-65.



(BK) Light bale clamp

A light grabber especially for mini shovels, light tractors (80 hp) and skid steer loaders.

- Because there is only one bale caught at a time, we were able to construct this grabber light.
- Suitable for round and square bales.
- 2 sliding tubes each arm made of 8 mm thick steel 52.
- Clamping tubes bent out of one piece 6.3 mm thickness steel.
- Cylinder size 30x50x700 mm.
- Height brackets 370 mm, tube Ø76 x 6,3 mm.
- Weight ± 210 kg.
- Price with hoses and 'male' connection, without attachment parts.

For further information:

https://www.kempmachines.com/bale-grabbers/light-bale-clamp?_return=/bale-grabbers

| | Types | Clamping range | Price |
|---|---------------|---------------------------------|-----------|
| ➤ | BK2100 | 700 – 2.100, sliding tubes 8 mm | € 1.925,- |

| | Options | Description | Price |
|---|------------|---------------------------------------------------------------------------------------------|---------|
| ➤ | GT | Pilot operating non-return valve (needed at open centre and internal leakage control valve) | € 125,- |
| ➤ | OV | At working pressure above 225 bar, then install a pressure relief valve | € 125,- |
| ➤ | DHL | Removable mounting parts | € 150,- |

For attachment parts see pages 61-65.



(BKS) Bale clamp standard

With this clamp, most bales can be caught. It's a simple clamp for round and square bales, suitable for tractors, wheel loaders, and telehandlers. To build on front end loader, lifting mast or three-point.

- Cylinder dimensions 25 x 50 x 750/900 mm.
- 2 Sliding tubes each clamping arm made of 8 mm steel 52.
- Height brackets 370 mm, tube Ø76x6,3 mm.
- Weight of standard grabber ± 320 kg.
- Price with hoses and 'male' connection, without attachment parts.


For further information:

https://www.kempmachines.com/bale-grabbers/standard-bale-clamp?_return=/bale-grabbers

| | Types | Clamping range | Price |
|---|----------------|----------------|-----------|
| ➤ | BKS2200 | 700 – 2.200 | € 1.995,- |
| ➤ | BKS2600 | 800 – 2.600 | € 2.125,- |

| | Options | Description | Price |
|---|------------|---------------------------------------------------------------------------------------------|---------|
| ➤ | GT | Pilot operating non-return valve (needed at open centre and internal leakage control valve) | € 125,- |
| ➤ | OV | At working pressure above 225 bar, then install a pressure relief valve | € 125,- |
| ➤ | REK | Rack for 2e bale removable | € 200,- |

For **attachment parts** see pages 61-65.

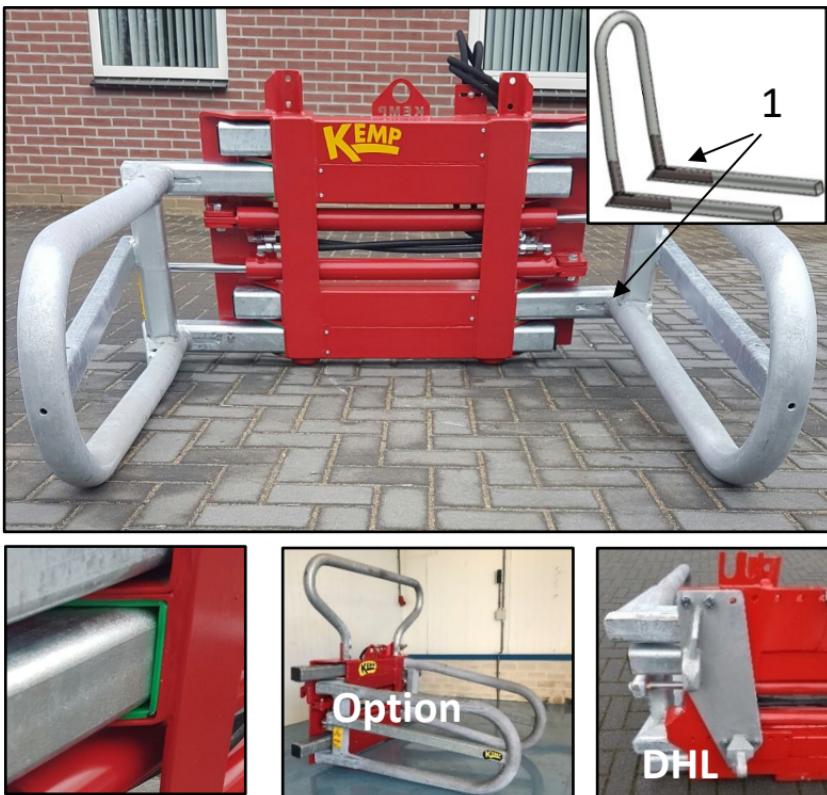

(BKC) Bale clamp compact

This clamp is a heavier model than the bale grabber standard (BKS).

- To build on front end loader, lifting mast or three-point.
- Extra strengthening in the brackets by welded strip (15 mm). (1)
- Plastic guide in the four tubes, therefore maintenance-free.
- Cylinder dimensions 25 x 50 x 750/900 mm.
- 2 Sliding tubes each clamping arm made of 8 mm steel 52.
- Height brackets 480 mm, tube Ø70 x 6,3 mm.
- Weight of compact grabber ± 350 kg.
- Price with hoses and 'male' connection, without attachment parts.


For further information:

https://www.kempmachines.com/bale-grabbers/compact-bale-clamp?_return=/bale-grabbers

| Types | Clamping range | Price |
|------------------|----------------|-----------|
| ➤ BKC2200 | 700 – 2.200 | € 2.525,- |
| ➤ BKC2500 | 700 – 2.500 | € 2.725,- |
| ➤ BKC2600 | 800 – 2.600 | € 2.725,- |

| Options | Description | Price |
|--------------|---------------------------------------------------------------------------------------------|---------|
| ➤ GT | Pilot operating non-return valve (needed at open centre and internal leakage control valve) | € 125,- |
| ➤ OV | At working pressure above 225 bar, then install a pressure relief valve | € 125,- |
| ➤ REK | Rack for 2e bale removable | € 200,- |
| ➤ DHL | Removable mounting parts | € 150,- |

For attachment parts see pages 61-65.

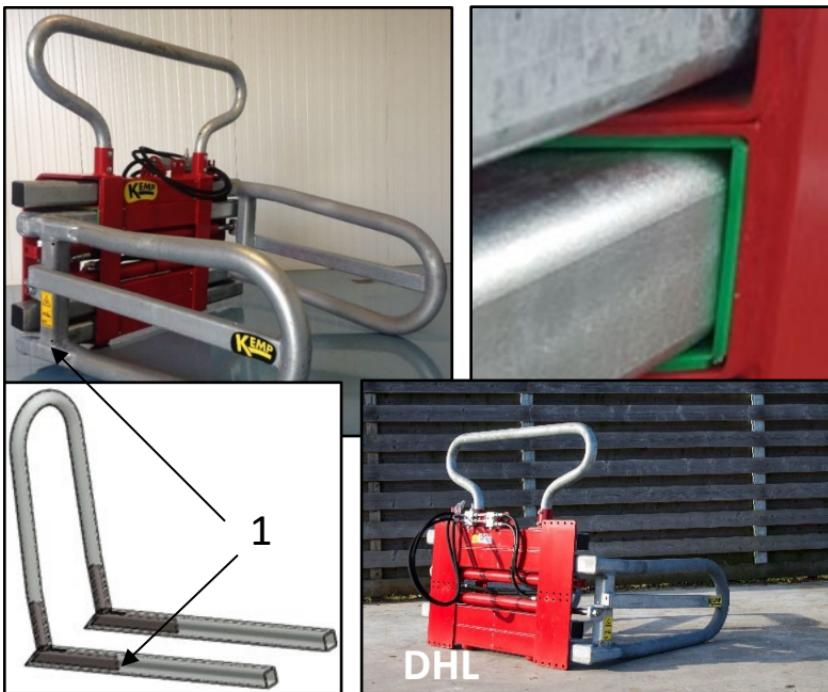

(BKZ) Bale clamp heavy

Heavy-constructed grabber for shovels, telehandlers, heavy lifting masts, and similar

- Pilot operated non-return valve and rack for 2nd bag.
- Cylinder dimensions 35 x 60 x 700/800/900 mm.
- Sliding tubes of the clamping arm made of 8 mm steel 52.
- Clamping tubes are bent out of one piece, tube Ø76 x 6,3 mm thickness steel and extra stiffeners.
- Extra strengthening in the brackets by welded strip (20 mm). (1)
- Plastic guide in the four tubes, therefore maintenance-free.
- Height brackets 480 mm.
- Weight 450 kg.
- Price with hoses and 'male' connection, without attachment parts.

For further information:

https://www.kempmachines.com/bale-grabbers/heavy-bale-clamp?_return=/bale-grabbers

| | Types | Clamping range | Price |
|---|----------------|----------------|-----------|
| ➤ | BKZ2300 | 700 – 2.300 | € 2.975,- |
| ➤ | BKZ2500 | 700 – 2.500 | € 3.175,- |
| ➤ | BKZ2600 | 800 – 2.600 | € 3.125,- |

| | Options | Description | Price |
|---|------------|-------------------------------------------------------------------------|---------|
| ➤ | DHZ | Removable mounting parts | € 200,- |
| ➤ | OV | At working pressure above 225 bar, then install a pressure relief valve | € 125,- |

For attachment parts see pages 61-65.



(BKZXL) Bale clamp XL

A robust grabber for if there are many bales must be moved.

- Heavy-duty mainframe in which plastic guiding strips are placed. Due to these strips, there is minimal wear, while sliding. There is no need to be lubricated
- Standard equipped with a rack for 2nd bale, pilot-operated non-return valve, and pressure relief valve.
- Cylinder dimensions 40 x 70 x 900 mm.
- Weld-on parts for tractors, wheel loaders, and telehandlers.
- Sliding tubes of the clamping arm made of 10 mm steel 52.
- Clamping tubes are bent out of one piece, 8 mm thick steel and extra stiffeners (25 mm strip) (1). Height of the clamping tube is 600 mm.
- Weight \pm 595 kg.
- Double model. Clamping range 900-1800 mm, mechanical adjustable to 1.100 – 2.100 mm.
- Price with hoses and 'male' connection, without attachment parts.

For further information:

https://www.kempmachines.com/bale-grabbers/heavy-bale-clamp-xl?_return=/bale-grabbers

| | Types | Clamping range | Price |
|---|------------------|----------------|-----------|
| ➤ | BKZXL2500 | 700 – 2.500 | € 4.300,- |
| ➤ | BKZXL2600 | 800 – 2.600 | € 4.200,- |
| ➤ | BKZXL | Double model | € 6.400,- |

For attachment parts see pages 61-65.



(BKGK) Bale clamp with large clamping range

Due to the big range, the bale grabber is suitable for mini bales or large bales of hay or straw as well for bundle bales.

- Also available with removable extension brackets.
- Standard equipped with pressure relief valve
- Can also be supplied with removable middle bracket.
- Weight \pm 420 kg.
- Price with hoses and 'male' connection, without attachment parts.

For further information:

<https://www.kempmachines.com/bale-grabbers/bale-clamp-with-large-range?return=/bale-grabbers>

| | Types | Clamping range | Price |
|---|-------|----------------|-----------|
| ➤ | BKGK | 700 – 2.700 | € 3.725,- |

| | Options | Description | Price |
|---|---------|----------------------------------|---------|
| ➤ | BLB | Long brackets fixed (2 meters) | € 250,- |
| ➤ | BVB | Removable extension brackets | € 750,- |
| ➤ | BDMB | Removable middle bracket | € 500,- |
| ➤ | GT | Pilot operating non-return valve | € 125,- |
| ➤ | GL | Synchronous valve | € 150,- |
| ➤ | REK | Rack for second bale removable | € 200,- |
| ➤ | DHZ | Removable mounting parts | € 200,- |

Other sizes/models on request, for **attachment parts** see pages 61-65.



(BKROM) Round Bale clamp mini

The round bale clamp mini is suitable for mini shovels and mini tractors.


- Due to the shape of the bracket, suitable for bales of different sizes.
- Equipped with one double-acting cylinder, providing pendulum operation.
- Due to the short build length of this machine, the weight is short on the vehicle, that provides more lifting power.
- The clamp brackets are 4 mm thick.
- Price with hoses and 'male' connection, without attachment parts.
- Standard equipped with removable mounting parts.

For further information:

| |
|---------------------------|
| BKROM |
| For bales till 400 kg |
| For bales of Ø300-850 mm. |
| Weight ± 90 kg |

| | Types | Description | Price |
|---|--------------|------------------------------|--------------|
| ➤ | BKROM | Clamping range of 300-850 mm | € 1.400,- |

For **attachment parts** see pages 61-65.



(BKROL) Light round Bale clamp

A round bale grabber for use with mini shovels and light tractors.

Due to the shape of the clamping brackets suitable for bales of different sizes.

Because the cylinders are positioned on the outside, the result is a minimum force and wear at the pivot point.

The machine is built in a very compact design, so the weight is close to the vehicle, which promotes lifting capacity.

Clamping brackets 5mm thickness.

Due to the slotted hole, it is easy to grab a bale.

Price with hoses and 'male' connection, without attachment parts.

For further information:

https://www.kempmachines.com/bale-grabbers/light-round-bale-grabber?_return=/bale-grabbers

| BKROL 1.100 | BKROL 1.400 |
|--------------------------------------------------|--------------------------------------------------|
| For bales up to 1.000 kg | For bales up to 1.100 kg |
| For bales of Ø700-1.100 mm. Max. open 1.400mm | For bales of Ø700-1.400 mm. Max. open 1.600mm |
| Weight ± 150 kg | Weight ± 170 kg |

| | Types | Description | Price |
|---|------------------|------------------------|-----------|
| ➤ | BKROL1100 | Bales up to Ø 1.100 mm | € 1.450,- |
| ➤ | BKROL1400 | Bales up to Ø 1.400 mm | € 1.550,- |

| | Options | Description | Price |
|---|------------|-------------------------------------------------------------------------|---------|
| ➤ | DHL | Removable mounting parts | € 150,- |
| ➤ | OV | At working pressure above 225 bar, then install a pressure relief valve | € 125,- |
| ➤ | GT | Pilot operating non-return valve | € 125,- |

For attachment parts see pages 61-65.



(BKRO) Round Bale clamp

The heavier version, for use on wheel loaders, telehandlers, and tractors.

- Due to the shape of the clamping brackets suitable for bales of different sizes.
- Because the cylinders are positioned on the outside, the result is a minimum force and wear at the pivot point.
- The machine is built in a very compact design, so the weight is close to the vehicle, which promotes lifting capacity.
- Clamp with 4 cylinders, clamping brackets 6mm thickness.
- Suitable for bales up to 1.800 kg.
- Clamping range of Ø 700 - 1.600 mm. Max. open 2.000 mm.
- Due to the slotted hole, it is easy to grab a bale.
- Weight 295 kg.
- Also deliverable as Double version
- Price with hoses, non-return valve and 'male' connection, without attachment parts.

For further information:

https://www.kempmachines.com/bale-grabbers/round-bale-grabber?_return=/bale-grabbers

| | Types | Description | Price |
|---|--------------|----------------|-----------|
| ➤ | BKRO | Single version | € 2.375,- |
| ➤ | BKROD | Double version | € 4.050,- |

| | Options | Description | Price |
|---|------------|-------------------------------------------------------------------------|------------|
| ➤ | DHL | Removable mounting parts | € 150,- |
| ➤ | OV | At working pressure above 225 bar, then install a pressure relief valve | € 125,- |
| ➤ | REK | Removable rack for second bale | € 300,- |
| ➤ | | 90° rotating head | On Request |

For **attachment parts** see pages 61-65.



(BKROZ) Heavy round bale clamp

Large clamping range of Ø 700 – 1.900 mm, can also hold small and large bales of 1.800 mm round. Max width 2.250 mm.

- This grabber is provided with movable clamping arms so that the bale is always maximum clamped around.
- Equipped with a piloted check valve so that the bale always hangs quietly.
- The double version is provided with sliding tubes in plastic guide with movable clamping arms.
- Weight single version ± 560 kg.
- Weight double version ± 925 kg.
- Suitable for bales up to 2.200 kg.
- Price with hoses and 'male' connection, without attachment parts.

For further information:

https://www.kempmachines.com/bale-grabbers/heavy-round-bale-grabber?_return=/bale-grabbers

| | Types | Description | Price |
|---|---------------|----------------|-----------|
| ➤ | BKROZ | Single version | € 3.950,- |
| ➤ | BKROZD | Double version | € 6.925,- |

| | Options | Description | Price |
|---|------------|-------------------------------------------------------------------------|---------|
| ➤ | DHZ | Removable mounting parts | € 200,- |
| ➤ | OV | At working pressure above 225 bar, then install a pressure relief valve | € 125,- |
| ➤ | REK | Removable rack for second bale | € 300,- |

For attachment parts see pages 61-65.



(BD) Bale transporter

Heavy bale transporter to transport round bales.

- Both sides of the BDD are hydraulic slideable, so that the bale does not get damaged when the bales are being transported.
- Ideal for marshy grassland.
- Fast and cheap way to transport bales.
- Double version: Plastic guide in the tubes.
- Standard equipped with 3-point mounting parts.
- Weight BDE: 160 kg.
- Weight BDD: 280 kg.

For further information:

https://www.kempmachines.com/agriculture/balecarrier?_return=/agriculture

| | Types | Clamping range | Price |
|---|------------|-------------------------------------------------|-----------|
| ➤ | BDE | Single version, mechanical adjustable | € 1.050,- |
| ➤ | BDD | Double version, both sides hydraulic adjustable | € 2.225,- |



(BSN) Bale Cutter

With the bale cutter, round bales up to 1,600 mm can be cut to be distributed in front of the feed fence or unloaded into the feed wagon.

- The net and film are held by a double clamping jaw.
- After opening the cutting frame, the clamp continues to hold the film and net until the cutting frame is above, allowing the net and film to be discharged after unpacking the bale.
- Equipped with 6 teeth of 50 mm thick and 8 coarse cutting blades for easy cutting even in tough grass.
- Equipped with 2 cylinders for stable and even cutting action.
- Pivot point equipped with heavy-duty shaft with Teflon bearings.
- Can be used with 1DW function.
- Weight \pm 525 kg.
- standard equipped with attachment parts.



For further information:

For attachment parts see pages 61-65.

| Types | Description | Price |
|-------|---------------------------|-----------|
| ➤ BSN | Attachment parts excluded | € 4.995,- |



(BP) Bale spike

Bale spike for hay and bales of straw.

- The bale spike is equipped with three heavy teeth in welding bushes so that the spikes do not tear off the tube.
- The bale spike is standard delivered with a rack for several bales and a foldable safety rack.
- **Light version (PBL):** width 1500 mm, 1000 or 1.500 mm high, for build on mini loaders, light tractors and similar. Spike Ø 30 mm.
- **Heavy version (BPZ):** 1850 width and 1800 mm high, for mounting on wheel loaders, telehandlers, loaders and similar. Spike Ø 45 mm
- Working length 950 mm.
- Prices are without attachment parts.

For further information:

<https://www.kempmachines.com/agriculture/bale-spike?return=/agriculture>

| | Types | Description | Price |
|---|----------------|-------------------------------------------------------------------|-----------|
| ➤ | BPL1000 | Light version width 1500 mm, height 1000 mm up to 800 kg. | € 975,- |
| ➤ | BPL1500 | Light version width 1.500 mm width, height 1.500 mm, up to 800 kg | € 1.150,- |
| ➤ | BPZ1800 | Heavy version width 1850 mm, height 1800 mm, up to 1500 kg | € 1.500,- |

| | Options | Description | Price |
|---|-------------|-----------------------------------------------------------------|---------|
| ➤ | EI | Extra welding bush | € 25,- |
| ➤ | ETL | Extra spike light type | € 50,- |
| ➤ | ETZ | Extra spike heavy type | € 80,- |
| ➤ | BPH | Spike hydraulic folding | € 650,- |
| ➤ | BPVR | Adjustable rack of 1.500 – 2.300, incl. 2 spikes (BPZ1800 only) | € 250,- |

For **attachment parts** see pages 61-65.



(STK) Straw Clamp

The Straw Clamp is designed to stack and move 3 or 4 large straw or hay bales together with a front loader, shovel or telehandler.

- Light version [STKS]: 1750 mm high and 1800 mm wide. With extendable side tube 2450 mm high. Suitable for: 2 bales of 90 cm high and 3 bales of 70 cm high. Equipped with 10 removable attachment parts that turn the bale. Weight: 480 kg.
- Heavy-duty version [STKL]: 2450 mm high and 1800 mm wide. Suitable for: 3 bales of 90 cm high and 4 bales of 70 cm high. Equipped with 14 removable attachment parts. Weight: 680 kg.
- The straw clamp is operated with 1 double-acting cylinder.
- Equipped with 14 hooks that rotate in the bale.
- 3 Conical weld-in bushings for mounting front loader tines, which can also be stored in the frame.

Advantages:

- All picked-up bales are clamped, by hooks rotating in the bale and pulling the bale against the frame.
- When the clamp is tilted forward, the bales remain suspended as the tines pull the straw ever more tightly against the frame when clamping.

For further information:

| | Types | Description | Price |
|---|-------------|--------------------------------------------------------------------------|-----------|
| ➤ | STKS | Straw clamp, including 3 removable teeth and removable attachment parts. | € 3.400,- |
| ➤ | STKL | Straw clamp, including 3 removable teeth and removable attachment parts. | € 3.925,- |

For attachment parts see pages 61-65.



(BBP) Roadside bale spike

- The roadside bale spike is specially made with a top clamp for roadside bales.
- The top clamp can close far enough to also clamp and take limp bales.
- The BBP1650 is standard equipped with ditch dirt bars, 1 top clamp and 6 teeth below.
- The BBP2300 is standard equipped with 2 top clamps and 6 teeth below.
- Can both be attached at the front or at the rear.
- This machine is standard equipped with three-point CAT2 take up.
- Weight 350 kg.

For further information:

| | Types | Description | Price |
|---|----------------|---------------------------------|-----------|
| ➤ | BBP1650 | Bermbalenprikker 1.650 mm breed | € 3.250,- |
| ➤ | BBP2300 | Bermbalenprikker 2.300 mm breed | € 3.500,- |

| | Opties | Description | Price |
|---|-------------|----------------------------------------|---------|
| ➤ | BBPH | Hydraulic folding teeth (BBP2300 only) | € 650,- |

For **attachment parts** see pages 61-65.



(MS) Maize leveller

The **short fixed** version has integrated lift arm - and top link points to an extra short construction.

- Solid construction for intensive use.
- Weight 575 kg.

The **swivel version** can swivel 30 degrees to both sides.

- By constructing the turning point short on the three-point, the scraper can swivel from the wall, so you do not lock up yourself against the trench wall.
- Also, it makes it easier to push the corn to the side, without driving along the side.
- Weight 775 kg.

The following applies to both scrapers:

- Possible to mount a rubber strip and thus be used as a snow scraper.
- Slide plate 10 mm thick steel.
- Width 275 cm.
- Height 125 cm with see-through slots.
- Optional adjustable side shields for working width max .3500 mm.
- Prices are without attachment parts.

For further information:

https://www.kempmachines.com/agriculture/maize-leveller?_return=/agriculture

| | Types | Description | Price |
|---|--------------|---------------------------------------------|--------------|
| ➤ | MS | Short fixed design incl. CAT 2 construction | € 4.275,- |
| ➤ | MSZ | Swivelling version | € 5.875,- |

| | Options | Description | Price |
|---|----------------|-------------------------------------|--------------|
| ➤ | MSP | Fixed side plates | € 375,- |
| ➤ | MSVZ | Adjustable side plates up to 3500mm | € 775,- |



(SVL) Silage Fork light version

This allows fast distribution of the grass silage.

- Thick-walled tubes are used as teeth, which are placed and welded through the main beam.
- Weld-on parts for front loaders, shovels, telehandlers.
- Weight 425 kg.
- Price exclusive attachment parts.

| Types | Description | Price |
|---------|-----------------------------|-----------|
| SVL2200 | 2.200 mm width with 6 teeth | € 2.450,- |
| SVL2600 | 2.600 mm width met 7 teeth | € 2.825,- |
| SVL3000 | 3.000 mm width met 8 teeth | € 3.325,- |

(SVZ) Silage Fork heavy version

- Teeth solid cut 60 mm wide, outer 100 mm wide.
- Teeth 1,600 mm long, height 1,800 mm, width 3,000 mm.
- Heavy-duty construction without moving parts.
- Weight ± 1,600 kg.

For further information:

| | Types | Description | Price |
|---|-------|----------------------------------|-----------|
| ➤ | SVZ | Price exclusive attachment parts | € 7.425,- |

| | Options | Description | Price |
|---|---------|-------------|--------------|
| ➤ | SVZM | Maizestrip | Upon request |

Other sizes on request.

For **attachment parts** see pages 61-65.



(FRH) Film Roll Holder

The Film roll holder is developed for unrolling silage film. lengths of 100+ metres can be unrolled easily due to the bearing construction. Available in 2 types:

- **The (FRHE) Film roll holder single.** This type is equipped with 1 bar.
- **The (FRH) Film roll holder.** This type is equipped with 2 bars.
- **The (FRHXL) Film roll holder.** This type is equipped with 2 bars.

These are the advantages of the Film roll holder:

- Solidly built.
- Bearing-mounted design, allowing smooth unrolling.
- Film rolls up to 2,000 mm wide and 750 mm diameter.
- Detachable attachments.

FRHE

Film rolls till 2.000 mm width and 1000 mm diameter.

FRH

Film rolls till 2.000 mm width and 750 mm diameter.


FRHXL

Film rolls till 2.000 mm width and 950 mm diameter.

For further information:

| | Types | Description | Price |
|---|--------------|----------------------------------------------------------|-----------|
| ➤ | FRHE | Single version (price is exclusive attachment parts). | € 1.475,- |
| ➤ | FRH | Double version (price is exclusive attachment parts). | € 1.900,- |
| ➤ | FRHXL | Double version XL (price is exclusive attachment parts). | € 2.500,- |

For attachment parts see pages 61-65.

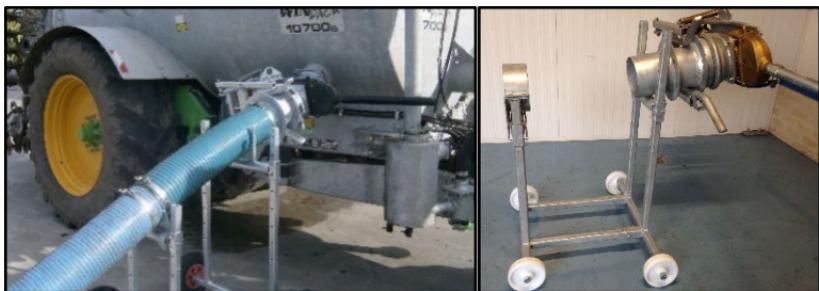

(SK) Tube hitching system

The hitching system is:

- Quick connection and disconnection of the hose to the tank.
- Easy to assemble by means of 4 bolts and two hydraulic hoses on the place of the existing valve.
- Operating with one double-acting valve.
- Does not leak during transportation, due to the distance of the valve to seal rubber is minimal.
- No bends which also does not lose suction.
- Less weight as a suction arm.
- When ordering, specify whether the system will be mounted to the left or right of the tank. We recommend, if possible, to mount it on the right.

For further information:


https://www.kempmachines.com/agriculture/tube-hitching-system?_return=/agriculture

| | Types | Description | Price |
|---|------------|--------------------------------------------------------------------------------------------|-----------|
| ➤ | SK6 | 6" version; Complete with valve and hose wagon and male coupling (without 6" suction hose) | € 2.475,- |
| ➤ | SK8 | 8" version; Complete with valve and hose wagon and male coupling (without 8" suction hose) | € 2.825,- |

| | Options | Description | Price |
|---|---------------|-------------------------------------------------------|---------|
| ➤ | SK8-6 | Male coupling with 6" hose adapter | € 150,- |
| ➤ | KEG | Recommended mounting angle 20 °, otherwise this wedge | € 120,- |
| ➤ | SK-KAR | Individual trolley with grommet and coupling | € 450,- |



Keg/wedge



Venting



Narrow construction



(DSV) Deep litter rake

The deep litter rake is designed to push the top of litter under the box in the bedding of the cow. Hereby the lounge is smooth and softer, and the litter dries better thus reducing the risk of diseases. To scrape the litter back in the lounge, topping up is less needed to still keep sufficient litter in the box, resulting in litter savings.

- Designed to work with a mini shovel and scrape litter as a solid fraction, compost, chopped straw or sand surfaces in a floating box.
- The deep litter rake is usable to the left and the right side with one double-acting control valve, the rake is locked in the folded position and in working position and can be used pushing and pulling.
- Tilting is the tipping function of the shovel.
- There is also an option to mount a scraper to clean the grids or waiting room.
- While moving the rake can be adjusted in height and the slide continues to follow the ground.
- Width folded 1260mm, working width 2500mm from the centre shovel, in the box 1.500mm.
- Width vehicle max. 1.600mm
- Weight 230 kg.

For further information:

https://www.kempmachines.com/agriculture/deeplitter-rake?_return=/agriculture

| | Types | Description | Price |
|---|-------|-----------------------------------|-----------|
| ➤ | DSV | Price is without attachment parts | € 1.950,- |

| | Options | Description | Price |
|---|---------|------------------------------------|---------|
| ➤ | DSVR | Rubber scraper, working width 1800 | € 600,- |

For attachment parts see pages 61-65.



(DSVZ) Deep litter rake heavy

The DSVZ is designed for larger shovels, tractors, and telehandlers. This one has a heavier construction and the base is wider so that a wider vehicle can be linked.

- Width of vehicle max. 2400 mm.
- The rake part in the box is 1500 mm.
- Working width 2950mm from the centre shovel
- Weight 325 KG.

For further information:

https://www.kempmachines.com/agriculture/deeplitter-rake?_return=/agriculture

| | Types | Description | Price |
|---|-------|-----------------------------------|-----------|
| ➤ | DSVZ | Price is without attachment parts | € 2.275,- |

| | Options | Description | Price |
|---|---------|------------------------------------|---------|
| ➤ | DSVZR | Rubber scraper, working width 2400 | € 750,- |

For attachment parts see pages 61-65.



(DSVA) Deep litter rake powered

- Can be used both left and right with 2 double-acting steering valves, if there is only one double-acting function present, a selection valve can be fitted.
- swiveling is done with the tilting function of the shovel.
- Available in a light version (**DSVA**) and a heavy version (**DSVZA**).
- The DSVA1000 and the DSVZA1000 have a working width of 1000 mm in the box.
- The DSVA1000 and the DSVZA1000 have a working width of 1000 mm in the box.
- Supplied with removable attachment parts as standard.

For further information:

| | Types | Description | Price |
|---|------------------|---------------------------------------------------|-----------|
| ➤ | DSVA1000 | Light version, working width 1.000 mm in the box. | € 3.400,- |
| ➤ | DSVA1350 | Light version, working width 1.350 mm in the box. | € 3.450,- |
| ➤ | DSVZA1000 | Heavy version, working width 1.000 mm in the box. | € 3.725,- |
| ➤ | DSVZA1350 | Heavy version, working width 1.350 mm in the box. | € 3.775,- |

| | Options | Description | Price |
|---|---------|--------------------------------|---------|
| ➤ | 6/2 | Electrical 6/2 hydraulic valve | € 350,- |

For attachment parts see pages 61-65.



OKBM



OKBZ



OKBS



OKBS

(OKB) Weed brush

The weed brush can be linked to the (mini)shovel, (mini)crane, tractors, spike, etc. as long as the minimum oil yield is 25 litres.

- By using a movable function with the pivot in front of the vehicle, there is a large swivel range possible. Actually 70 degrees to the left and the right, which ensures that the weed brush can move far besides the vehicle. This gives a good view on the brush.
- The weed brush is designed with an oscillating construction, which ensures that the brush follows the ground. Because of this, it is not necessary to correct the height by unevenness of +/- 15 cm. At the same time, this allows the angle of the brush to be patched, by lifting or dropping the frame, for a more or less aggressive working.
- The diameter of the brush is 750 mm (Option 1000 mm).
- The brush can be operated with two hydraulic functions.
- Available with a brush of steel sheets or steel cable.
- Weight 200 kg.



Oscillating

For further information:

<https://www.kempmachines.com/park/weed-brushes>

| | Types | Description | Price |
|---|--------------|---------------------------|--------------|
| ➤ | OKBS | Fixed version | € 1.725,- |
| ➤ | OKBM | Mechanical swivel version | € 2.150,- |
| ➤ | OKBZ | Hydraulic swivel version | € 2.395,- |

For **attachment parts** see pages 61-65.


Options Weed brush



Edge knife



Rubber flap



Tilting

Edge knife: The edge cutter ensures that the edges, for example from a lawn, are cut tightly. The edging knife is equipped with an obstacle protection by means of a heavy spring.

Rubber flap: The rubber flap ensures that the weeds do not fly far away. The rubber flap can be adjusted in several positions.

Tilting 15 degrees: The option allows the machine to tilt the brush 15 deg.

| | Options | Description | Price |
|---|------------------|-------------------------------------------------------------------------------|-----------|
| ➤ | OKBF | Movable rubber flap | € 300,- |
| ➤ | OKBVA800 | Extended arm (800mm instead of 650mm) | € 75,- |
| ➤ | OKBVA1000 | Extended arm (1000mm instead of 650mm) | € 100,- |
| ➤ | OKBKS | Edge knife | € 1.850,- |
| ➤ | OKBKM | Mechanical adjustment tilting | € 500,- |
| ➤ | OKBKH | Hydraulic adjustment tilting | € 600,- |
| ➤ | OKB1000 | Brush diameter 1000 mm, 44 bundles steel cable (min. oil yield 30 litre). | € 200,- |
| ➤ | OKBNY1000 | Brush diameter 1000 mm, 24 replaceable nylon parts (min. oil yield 30 litre). | € 200,- |

Advice by intensive use:

| | | | |
|---|-------------|------------------------|---------|
| ➤ | DL | Return flow connection | € 75,- |
| ➤ | OKBO | Pressure relief valve | € 125,- |

Options for operating the brush

| | Options | Description | Price |
|---|---------------|---------------------------------------------------------------------------|-----------|
| ➤ | OKBE | Electric use of turning and swivelling the brush with 1 function | € 600,- |
| ➤ | OKBEE | Electric use of turning, swivelling and tilting the brush | € 850,- |
| ➤ | OKB3XE | Electric use of turning, swivelling, tilting the brush and the edge knife | € 1.100,- |
| ➤ | OKBJ | Joystick with magnetic base and cable for operating | € 250,- |

Brushes



Steel sheets



Steel cable



LBNY750



Nylon



LBNYV750 / LBNYV1000

Nylon parts

| Options | Description | Price |
|--------------------|---------------------------------------------------|---------|
| ➤ LBHKG | 750mm with 76 bundles steel sheets | € 200,- |
| ➤ LBSTK750 | 750mm with 36 bundles steel cable | € 190,- |
| ➤ LBSTK1000 | 1000mm with 44 bundles steel cable | € 275,- |
| ➤ LBNY750 | 750mm | € 150,- |
| ➤ LBNYV750 | 750 mm with 20 replaceable nylon parts | € 250,- |
| ➤ LBNY1000 | 1000mm with 24 replaceable nylon parts | € 350,- |
| ➤ LPNYV | Replaceable nylon parts for LBNY1000 and LBNYV750 | € 5,50 |

For ordering these brushes, see the link below:

<https://www.kempmachines.com/weed-brushes>



(OKBD) Weed brush Duo

The double weed brush can be connected to (mini) loaders, (mini) excavator, tractor, forklift, as long as the minimum oil yield is 40L and the machine is equipped with a non-pressurized return.

The advantage of a double brush is that a larger surface can be brushed at the same time. The brushes have the same direction of rotation so that the dirt is drained on one side. A second advantage is that two brushes adapt better to uneven surfaces than one large brush, because both can oscillate independently.

- The weed brush is designed with an oscillating construction, so that the brush is ground-following, therefore it is not necessary to correct the height for irregularities of +/- 15 cm. At the same time, the angle of the brush can be adjusted by lifting the frame or lowering it for a more or less aggressive effect.
- The double weed brush is available as a fixed or hydraulically pivoting version. By using a hydraulic swivel function with the pivot point against the vehicle, a large swivel range is possible, namely 70 degrees to the left and to the right, so that the weed brush can reach far next to the vehicle and thus there is also a good view on the brush.
- The diameter of the brushes are 750 mm. Available with a brush made of sheet steel or steel cable.
- The brush can be operated with two hydraulic functions.
- Weight \pm 300 kg

For further information:

https://www.kempmachines.com/park/weed-brushes/double-weed-brush?_return=/park/weed-brushes

| | Types | Description | Price |
|---|--------------|--------------------------|-----------|
| ➤ | OKBSD | Fixed version | € 3.325,- |
| ➤ | OKBZD | Hydraulic swivel version | € 3.825,- |

| | Options | Description | Price |
|---|-----------------|--------------------------------------------------------|---------|
| ➤ | OKBF | Movable rubber flap | € 300,- |
| ➤ | OKBE | Electric use of turning and swivelling with 1 function | € 600,- |
| ➤ | OKBJ | Joystick with magnetic base and cable | € 250,- |
| ➤ | OKBD1000 | Brush 1000 mm, 44 bundles steel cable | € 400,- |

For attachment parts see pages 61-65.



(OKBT) Weed brush Triple

The triple weed brush can be connected to (mini) loaders, (mini) excavator, tractor, forklift, etc. as long as the minimum oil yield is 60 liters and the machine is equipped with a non-pressurized return.

With this machine, large surfaces can be brushed faster thanks to the large working width. The brushes have the same direction of rotation so that the dirt is drained to one side.

The weed brush triple is available as a fixed or hydraulically swivelling version. By using a hydraulic swivel function with the pivot point against the vehicle, a large swivel range is possible, namely 70 degrees to the left and to the right, so that the weed brush can reach far next to the vehicle and thus there is also a good view on the brush. In case of serious contamination, there is the possibility to swivel as much as possible so that brushes, brush together in a row. The fixed version is suitable for an excavator with turn-tilt head.

The diameter of the brushes are 750 mm.

A third advantage is that three brushes adapt better to uneven surfaces than one large brush, because all can oscillate independently.

The maximum working width of the triple version is 2,225 mm.

For further information:

https://www.kempmachines.com/park/weed-brushes/triple-weed-brush/triple-weed-brush?_return=/park/weed-brushes/triple-weed-brush

| | Types | Description | Price |
|---|--------------|--------------------------|-----------|
| ➤ | OKBST | Fixed version | € 4.825,- |
| ➤ | OKBZT | Hydraulic swivel version | € 5.650,- |

| | Options | Description | Price |
|---|-------------|--------------------------------------------------------|---------|
| ➤ | OKBF | Movable rubber flap | € 300,- |
| ➤ | OKBE | Electric use of turning and swivelling with 1 function | € 600,- |
| ➤ | OKBJ | Joystick with magnetic base and cable | € 250,- |

For attachment parts see pages 61-65.



(SRS) Stone fork

Ideal to get out of bricks or tiles.

- Teeth C.T.C. 80 mm, so that no stones can fall through.
- To deliver to mini loader or mini crane.
- Equipped with removable mounting part as standard, except attachments for excavators (these are welded to the stonework).
- Standard length \pm 900 mm.

For further information:

| | Types | Description | Price |
|---|----------------|---------------------------------------------------|--------------|
| ➤ | SRS1200 | 1.200 mm width with 15 spikes | € 1.325,- |
| ➤ | SRS1300 | 1.300 mm width with 16 spikes | € 1.350,- |
| ➤ | SRS1500 | 1.500 mm width with 19 spikes | € 1.500,- |
| ➤ | SRS1750 | Heavier version: 1.750 mm width with 22 spikes | € 1.950,- |
| ➤ | SRS2000 | Heavier version: 2.000 mm width with 25 spikes | € 2.200,- |

| | Options | Description | Price |
|---|----------------|-------------------------------------------------------------------------------------|--------------|
| ➤ | SRSTH | Outer spikes higher placed next to the frame for stability lying of the outer stone | € 100,- |

For **attachment parts** see pages 61-65.



(ADAPTE) Adapter Attachment > Euro

Adapter from any attachment to Euro connection.

| | Types | Description | Price |
|---|--------|-------------------------------|---------|
| ➤ | ADAPTE | Euro (excl. Attachment parts) | € 995,- |

For **attachment parts** see pages 61-65, for further information, see the link at the bottom of the pages.



(ADAPT3) Adapter Attachment > CAT-2

Adapter from any attachment to CAT-2 connection.

This adapt is standard equipped with removable hooks.

For further information:

kempmachines.com

| | Types | Description | Price |
|---|--------|----------------------------------------|---------|
| ➤ | ADAPT3 | 3-point CAT-2 (excl. Attachment parts) | € 995,- |

| | Options | Description | Price |
|---|-----------|-------------|---------|
| ➤ | ADAPTCAT3 | CAT-3 | € 100,- |
| ➤ | | Pin-cone | € 150,- |
| ➤ | | Hitch | € 150,- |

For **attachment parts** see pages 61-65.



(ADAPT) Attachment > Attachment

Adapter from any attachment to another attachment of your choice.

- Both with mechanical locking.
- Price exclusive attachment parts.

For further information:

kempmachines.com

| | Types | Description | Price |
|---|---------------------|---------------------|-----------|
| ➤ | ADAPTL light | Shovels to 4.000 kg | € 1.100,- |
| ➤ | ADAPTZ heavy | Shovels to 8.000 kg | € 1.400,- |

For attachment parts see pages 61-65.



(MT) Machine Transporter

Suitable for moving implements, the machine transporter can be attached to your shovel, telehandler or tractor.

For further information:

| | Types | Description | Price |
|---|------------|---------------------------------------------------------------------------|-----------|
| ➤ | MT | Exclusive attachment parts Included K50 hitch | € 900,- |
| ➤ | MTL | Exclusive attachment parts Inclusive pull pin and pick-up mandrel | € 1.325,- |
| ➤ | MTV | Exclusive attachment parts Inclusive K50 hitch, Cat 1-2 catching hooks | € 1.400,- |

| | Options | Description | Price |
|---|------------|----------------------|---------|
| ➤ | K80 | K80 hitch (MTL only) | € 175,- |

For attachment parts, see pages 61-65.



(MTLI) Machine Transporter forklift receiver

Suitable for moving implements, the machine transporter can be attached to your shovel, telehandler or tractor.

For further information:

| | Types | Description | Price |
|---|--------------|-------------------------------------------------------------------------|--------------|
| ➤ | MTLI | Including forklift receiver 200*80*6 Included K50 hitch | € 950,- |
| ➤ | MTLIV | Including forklift 200*80*6 Including K50 hitch, cat 1-2 catch hooks | € 1.400,- |
| ➤ | MTLIL | Including forklift receiver 200*100*8 | € 1.200,- |

| Options | Description | Price |
|----------------|------------------------------|--------------|
| K80 | K80 kogel (alleen bij MTLIL) | € 175,- |

Rubbers

| Nylon inlay | Sizes | Price |
|--------------------------------------------|------------------------------------------------------------|--------------|
| RUBR1444 | 40 x 400 x 1.400 mm | € 145,- |
| RUBR1844 | 40 x 400 x 1.800 mm | € 170,- |
| RUBR2244 | 40 x 400 x 2.200 mm | € 190,- |
| RUBR2544 | 40 x 400 x 2.500 mm | € 220,- |
| RUBR2555 | 50 x 500 x 2.500 mm | € 330,- |
| RUBR2844 | 40 x 400 x 2.800 mm | € 240,- |
| RUBR2855 | 50 x 500 x 2.800 mm | € 365,- |
| RUBR3244 | 40 x 400 x 3.200 mm | € 275,- |
| RUBR3255 | 50 x 500 x 3.200 mm | € 425,- |
| RUBR3455 | 50 x 500 x 3.400 mm | € 450,- |
| RUBR3855 | 50 x 500 x 3.800 mm | € 495,- |
| ROL44 | Role of 400 x 40, any length possible | € 95,-/mtr |
| ROL55 | Role of 500 x 50, any length possible | € 135,-/mtr |
| RUBR244 | Rubber support leg 40 x 400 x 160 mm | € 25,- |
| RUBR255 | Rubber support leg 50 x 500 x 200 mm | € 30,- |
| Steel inlay | (is used as a conveyor belt, minor damage possible) | Price |
| RUBS1443 | 32 x 400 x 1.400 mm | € 180,- |
| RUBS1843 | 32 x 400 x 1.800 mm | € 200,- |
| RUBS1853 | 32 x 500 x 1.800 mm | € 250,- |
| RUBS2243 | 32 x 400 x 2.200 mm | € 230,- |
| RUBS2253 | 32 x 500 x 2.200 mm | € 290,- |
| RUBS2543 | 32 x 400 x 2.500 mm | € 240,- |
| RUBS2553 | 32 x 500 x 2.500 mm | € 320,- |
| RUBS2743 | 32 x 400 x 2.700 mm | € 265,- |
| RUBS2753 | 32 x 500 x 2.700 mm | € 350,- |
| RUBS3043 | 38 x 400 x 3.000 mm | € 310,- |
| RUBS3053 | 38 x 500 x 3.000 mm | € 400,- |
| RUBS3243 | 38 x 400 x 3.200 mm (in 2 parts) | € 380,- |
| RUBS3253 | 38 x 500 x 3.200 mm (in 2 parts) | € 475,- |
| RUBS3455 | 50 x 500 x 3.400 mm (with steel net) | € 550,- |
| RUBS3855 | 50 x 500 x 3.800 mm (with steel net) | € 625,- |
| ROL43 | Role of 400 x 40, any length possible | € 115,-/mtr |
| Single beams incl. Strips and bolts | | Price |
| 140*140*6 | Up to 2.500 mm (excl. rubber) | € 340,- |
| 140*140*6 | Up to 3.200 mm (excl. rubber) | € 425,- |

The 500-mm-high rubbers are supplied with 2 rows of holes, so it can be adjusted 4 times and therefore worn further.

Shipping costs rubbers till 2.200 mm € 55,- above 2.200 mm € 70,-

Attachment parts

Please check the drawings when ordering, see:
<https://www.kempmachines.com/attachment-parts>



Removable attachments



Loose plate

| | Description | Price |
|---|---------------------------------------------------------------------------|---------------------------|
| ➤ | Set of loose plates short - 490 mm long, 12 mm thick, 2 rows of holes | € 100,- Excl. attachments |
| ➤ | Set of loose plates long - 740 mm long, 12 mm thick, 3-4 rows of holes | € 125,- Excl. attachments |

When ordering removable attachment plates only, we charge the set of plates and the attachment parts (welded and painted)

Attachment parts (welded or mounted on the machine):

| Types | Tractor/ Front end loader | |
|-------|---------------------------|-------------------------------------|
| ATA1 | Accord Horticulture | € 225,- |
| ATA2 | Accord Cat 0 | € 225,- |
| ATA3 | Accord Cat 1/2/3 | € 250,- |
| ATAL | Alö quicke | € 200,- |
| ATDT | 3-Point Horticulture | € 200,- |
| ATD0 | 3-Point Cat 0 | € 200,- |
| ATD1 | 3-Point Cat 1 | € 200,- |
| ATD2 | 3-Point Cat 2 | € 200,- |
| ATD3 | 3-Point Cat 3 | € 225,- |
| ATD4 | 3-Point Cat 4 | Specify high or low Upon request |
| ATEU1 | Euro | € 100,- |
| ATF1 | Faucheur | € 250,- |
| ATM1 | MX (Mailleux) | € 225,- |
| ATTR | Trimax | € 200,- |
| ATVE | Veto | € 200,- |

Please check the drawings when ordering, see:

<https://www.kempmachines.com/attachment-parts>

| Types | Minishovels/ Skid steer loader | |
|-------|--------------------------------|---------|
| AAT1 | Atlas 32 | € 200,- |
| AAV1 | Avant | € 200,- |
| ABO2 | Bobcat | € 200,- |

| | | | |
|--------------|-----------------------------|--------------------------------------|---------|
| AEV1 | Everun | 780 intermediate size | € 225,- |
| AFU1 | Fuchs (hook) | | € 225,- |
| AFU2 | Fuchs (plate) | | € 225,- |
| AGA1 | Gamma | | € 200,- |
| AGE1 | Gehl | | € 200,- |
| AGE2 | Gehl | | € 200,- |
| AGI1 | Giant | 562 intermediate size | € 200,- |
| AGI1B | Giant | Attachments forwards (stone fork) | € 250,- |
| AGI2 | Giant | 802 intermediate size | € 200,- |
| AIN1 | Intrac | Euro system width or small | € 100,- |
| AJC4 | JCB 403 | Hollow sections frame | € 225,- |
| AJC5 | JCB 403 | Hook (662 between) | € 200,- |
| AWE1 | Job man | See Weidemann | € 200,- |
| AKN1 | Knikmops | K90 | € 200,- |
| AKN2 | Knikmops | K130 | € 200,- |
| AKN3 | Knikmops | Hook K250 | € 200,- |
| AKR1 | Kramer | Type 180/250/350 | € 200,- |
| AKU1 | Kubota | | € 225,- |
| AKU2 | Kubota | | € 225,- |
| AMK1 | Macks | Haken | € 275,- |
| AMK2 | Macks | Hollow sections frame | € 275,- |
| AMO1 | Multi-One | | € 200,- |
| AMU1 | Mustang | Plate 900mm | € 200,- |
| AMU2 | Mustang | Plate 1138mm | € 200,- |
| AMU3 | Mustang | Hook | € 200,- |
| ANO1 | Norcar | Avant attachment | € 200,- |
| API1 | Pitbull | Giant attachment | € 200,- |
| ASA1 | Sauerburger | | € 200,- |
| ASC2 | Schäffer hook | 2000/3000 series | € 225,- |
| ASC1 | Schäffer Hollow sections | 520 of 620 | € 225,- |
| ASP1 | Sherpa | (specify type) | € 300,- |
| ASK1 | Steko | | € 300,- |
| AST1 | Striegel | | € 250,- |
| ATH1 | Thaler | | € 250,- |
| AWE1 | Weideman (hook) | | € 200,- |
| AWE3 | Weideman (plate) | | € 250,- |

Please check the drawings when ordering, see:

<https://www.kempmachines.com/attachment-parts>

| Types | Shovel | | |
|--------------|---------------|---------------------|---------|
| AAH1 | Ahlmann | | € 225,- |
| AAH2 | Ahlmann | | € 225,- |
| AAH3 | Ahlmann | | € 250,- |
| AAH4 | Ahlmann | | € 350,- |
| AAT2 | Atlas | 945 / hoh 310 | € 225,- |
| AAT3 | Atlas | 945 / 845 / hoh 500 | € 300,- |

| | | | |
|--------------|----------------|--------------------------------------|---------|
| ACA2 | Catterpillar | | € 250,- |
| ACA3 | Catterpillar | | € 225,- |
| AHI1 | Hitachi | 860 intermediate size | € 250,- |
| AJC6 | JCB | 648 intermediate size | € 250,- |
| AJC7 | JCB | 860 intermediate size | € 250,- |
| AJC8 | JCB | 970 intermediate size | € 350,- |
| AKO1 | Komatsu | | € 250,- |
| AKR2 | Kramer | | € 250,- |
| ALI1 | Liebherr | | € 250,- |
| ALI2 | Liebherr | | € 350,- |
| AMC1 | Mecalac | | € - |
| | O en K | On request | € - |
| | Pallazzani | On request | € - |
| APA1 | Paus | | € 300,- |
| ASC3 | Schäffer | 760 intermediate size | € 250,- |
| ASC4 | Schäffer | 860 intermediate size | € 250,- |
| ASH1 | Schaeff | Ø 35 top and bottom | € 250,- |
| ASH2 | Schaeff | Ø 50 top and bottom | € 300,- |
| ASH3 | Schaeff | Ø 50 top and 60 bottom | € 350,- |
| ATE2 | Terex | Ø 35 top and bottom | € 250,- |
| ATE3 | Terex | Ø 50 top and bottom | € 300,- |
| ATE4 | Terex | Ø 50 top and 60 bottom | € 350,- |
| AVE1 | Veneri | | € 300,- |
| AVE2 | Veneri | | € 300,- |
| AVO1 | Volvo | 648 intermediate size | € 250,- |
| AVO2 | Volvo | 860 intermediate size | € 250,- |
| AVO2B | Volvo | Attachment backwards (bale clamp) | € 250,- |
| AVO3 | Volvo | Hoh 436 mm | € 300,- |
| AVO4 | Volvo | 970 between / hoh 618 | € 350,- |
| AVO5 | Volvo | 1000 between / hoh 780 | € 500,- |
| AWD1 | WD 2000 | Class 5-6 | € 500,- |
| AWD2 | WD 2000 | Class 7-8 | € 600,- |
| AWE2 | Weideman Groot | | € 425,- |
| AWR1 | Werklust | | € 450,- |

Please check the drawings when ordering, see:

<https://www.kempmachines.com/attachment-parts>

| Types | Telehandler | |
|-------------|------------------|---------|
| ABO1 | Bobcat | € 350,- |
| ACA1 | Catterpillar TH | € 350,- |
| ACL1 | Claas | € 350,- |
| ADE1 | Deutz | € 350,- |
| ADI1 | Dieci | € 350,- |
| ADI2 | Dieci | € 350,- |
| AJC1 | JCB quickhitch | € 275,- |
| AJC2 | JCB Tool Carrier | € 275,- |
| AJC3 | JCB Q-Fit | € 350,- |
| ADE1 | JLG Deutz-Fahr | € 350,- |

| | | | |
|-------------|-----------------------|-------------------------|---------|
| AJO1 | John Deere | | € 350,- |
| AKR3 | Kramer | | € 350,- |
| AMA1 | Manitou | Tube | € 350,- |
| AMA2 | Manitou | Pin-cone | € 350,- |
| AMB1 | Matbro | Picking beam / Pin-cone | € 350,- |
| AME1 | Merlo ZM1 | | € 250,- |
| AME2 | Merlo ZM2 | | € 250,- |
| | Removable attachments | Extra price €100,- | |
| AME3 | Merlo ZM3 | | € 300,- |
| | Removable attachments | Extra price €100,- | |
| ANE1 | New holland | | € 300,- |
| ATE1 | Terex | | € 300,- |

| Types | Excavator | | |
|--------------------|--------------------|------------------------|---------|
| CW-B05 | CW 0/ 05 Bucket | | € 200,- |
| CW-H05 | CW 0/ 05 Hamer | | € 200,- |
| CW-T05 | CW 0/ 05 Twin | | € 225,- |
| CW-B10 | CW 10 Bucket | | € 200,- |
| CW-H10 | CW 10 Hamer | | € 200,- |
| CW-T10 | CW 10 Twin | | € 250,- |
| CW-B20/30 | CW 20/ 30 Bucket | | € 375,- |
| CW-H20/30-1 | CW 20/ 30 Hamer | | € 300,- |
| CW-H20/30-2 | CW 20/ 30 Hamer | | € 375,- |
| CW-H20/30-3 | CW 20/ 30 Hamer | | € 375,- |
| CW-T20/30 | CW 2/ 3 Twin | | € 500,- |
| CW-20/30 B | CW 2/ 3 45 degrees | (Bale clamp) | € 575,- |
| AEN45 | Engcon S45 | Other types on request | € 300,- |
| AEN60 | Engcon S60 | Other types on request | € 350,- |

Please check the drawings when ordering, see:

<https://www.kempmachines.com/attachment-parts>

| Types | Fork lift truck | |
|--------------|-------------------------------------------------|---------|
| AFE2 | Attachment parts forklift plate FEM II | € 250,- |
| AFE3 | Attachment parts forklift plate FEM III | € 300,- |
| AHK1 | Hollow sections for lift forks 160 x 80 x 6 mm | € 175,- |
| AHK2 | Hollow sections for lift forks 200 x 80 x 6 mm | € 200,- |
| AHK3 | Hollow sections for lift forks 200 x 100 x 8 mm | € 225,- |

KEMP
Machines