

Pricelist From 01-01-2025



- 窗 +31 (0) 30 638 47 42
- Oudwulfseweg 9, 3992 LT Houten
- www.kempmachines.com



KEMP

Cell Phone number:

Jacco Kemp +31 (0)6-48687318

Terms of delivery:

- We deliver according to Metaalunie conditions. These are send on request.

Per expedition:

- Transportation costs on request.

The following applies to everything:

- No rights are derived from the prices in the printed booklets, the digital price list is always leading, see <u>www.kempmachines.com/prices</u>
- Subject to changes and printing errors.

Table of contents

(VBE) Single Silage Pusher7
(VBES) Single Silage pusher fixed 8
(DVB) Double Silage pusher 9
(VVB) Silage pusher adjustable 10
(RVSA) Rubber feed scraper on the back 11
(RVS) Rubber feed scraper (painted) 12
(RVS) Rubber feed scraper (galvanised) 13
(RVSXL) Rubber feed scraper XL 14
(RVSMM) Rubber feed scraper Mini Mechanical 15
(RVSM) Rubber feed scraper mechanical 16
(RVSV) Rubber feed scraper V-shape 17
(RSVB) Rubber bucket scraper 18
(RVSOKB) Rubber feed scraper with two brushes 19
(RSVOKBD) Fixed rubber scraper with two brushes
(RSVOKBZ) Fixed rubber scraper with one adjustable brush
(KCLD) Silago coronor loft and right 22
(KSLR) Silage scraper left and right 22
(KSV) Silage scraper fixed
(KSV) Silage scraper fixed 23
(KSV) Silage scraper fixed
(KSV) Silage scraper fixed
 (KSV) Silage scraper fixed
 (KSV) Silage scraper fixed
 (KSV) Silage scraper fixed
 (KSV) Silage scraper fixed
 (KSV) Silage scraper fixed
(KSV) Silage scraper fixed
(KSV) Silage scraper fixed.23(KSDW) Silage scraper pushing model.24(KSD) Silage scraper rotatable25(RVSKS) Rubber feed- and silage scraper.26(RSVKS) Fixed rubber scraper (light version)27(RSVKL) Fixed rubber scraper (heavy version)28(RSVKD) Fixed rubber scraper with extra volume29(RSVKSLI) Fixed rubber scraper with forklift receiver30(RSVKLLI) Fixed rubber scraper with forklift receiver31(RVSKLI) Fixed rubber scraper with forklift receiver +32
(KSV) Silage scraper fixed.23(KSDW) Silage scraper pushing model.24(KSD) Silage scraper rotatable25(RVSKS) Rubber feed- and silage scraper.26(RSVKS) Fixed rubber scraper (light version)27(RSVKL) Fixed rubber scraper (heavy version)28(RSVKD) Fixed rubber scraper with extra volume29(RSVKSLI) Fixed rubber scraper with forklift receiver30(RSVKLLI) Fixed rubber scraper with forklift receiver31(RVSKLI) Fixed rubber scraper with forklift receiver +32(URSK) Fixed rubber scraper 3-point33
(KSV) Silage scraper fixed.23(KSDW) Silage scraper pushing model.24(KSD) Silage scraper rotatable25(RVSKS) Rubber feed- and silage scraper.26(RSVKS) Fixed rubber scraper (light version)27(RSVKL) Fixed rubber scraper (heavy version)28(RSVKD) Fixed rubber scraper with extra volume29(RSVKLI) Fixed rubber scraper with forklift receiver30(RSVKLI) Fixed rubber scraper with forklift receiver31(RVSKLI) Fixed rubber scraper with forklift receiver +32(URSK) Fixed rubber scraper 3-point33(RMS) Manure scraper.34
(KSV) Silage scraper fixed.23(KSDW) Silage scraper pushing model.24(KSD) Silage scraper rotatable25(RVSKS) Rubber feed- and silage scraper.26(RSVKS) Fixed rubber scraper (light version)27(RSVKL) Fixed rubber scraper (heavy version)28(RSVKD) Fixed rubber scraper with extra volume29(RSVKSLI) Fixed rubber scraper with forklift receiver30(RSVKLLI) Fixed rubber scraper with forklift receiver31(RVSKLI) Fixed rubber scraper with forklift receiver +32(URSK) Fixed rubber scraper 3-point33(RMS) Manure scraper.34(RMSHV) Rubber scraper adjustable angles35

(TenWXL) Yard scraper hydraulic XL 39
(TenWK) Heavy yard scraper hydraulic short model 40
(BK) Light bale clamp 41
(BKS) Bale clamp standard 42
(BKC) Bale clamp compact 43
(BKZ) Bale clamp heavy 44
(BKZXL) Bale clamp XL 45
(BKGK) Bale clamp with large clamping range 46
(BKROM) Round Bale clamp mini 47
(BKROL) Light round Bale clamp 48
(BKRO) Round Bale clamp 49
(BKROZ) Heavy round bale clamp 50
(BD) Bale transporter 51
(BSN) Bale Cutter 52
(BP) Bale spike 53
(STK) Straw Clamp54
(BBP) Roadside bale spike 55
(MS) Maize leveller 56
(SVL) Silage Fork light version 57
(SVZ) Silage Fork heavy version 57
(FRH) Film Roll Holder
(SK) Tube hitching system 59
(DSV) Deep litter rake 60
(DSVZ) Deep litter rake heavy61
(DSVA) Deep litter rake powered 62
(OKB) Weed brush 63
(OKBD) Weed brush Duo 66
(OKBT) Weed brush Triple 67
(SRS) Stone fork 68
(ADAPTE) Adapter Attachment > Euro
(ADAPT3) Adapter Attachment > CAT-2
(ADAPT) Attachment > Attachment
(MT) Machine Transporter71
(MTLI) Machine Transporter forklift receiver

Rubbers	73
Attachment parts	74



(VBE) Single Silage Pusher

Left and right operating by a double operating cylinder.

- Due to the special construction, the wheel is always rotating.
- It is possible to block the wheel so that the residual feed can be moved.
- Including wheel (assembled).
- Can be delivered with weld-on parts for (mini)shovel a.s.
- Weight VBE: ± 200 kg.
- Weight VBEZ: ± 275 kg.

For more information:

https://www.kempmachines.com/silage-pushers/single-silagepusher? return=/silage-pushers

	Types	Description	Price
\mathbf{A}	VBE3	Inclusive 3-point frame	€ 1.350,-
	VBE	With the possibility to mount	
		attachment parts	€ 1.400,-
\triangleright	VBEZ	Heavy version	€ 1.750,-



(VBES) Single Silage pusher fixed

Perfect to use with small mini shovels, max. 1.200 mm.

- Easy to hitch with quick lock.
- Including wheel (assembled).
- The wheel can be blocked to move the residual feed
- Delivered with a rubber support leg, not necessary to retract a support leg.
- No hydraulic hoses needed.
- Also available left or right operating to use for wider vehicles.

For further information:

https://www.kempmachines.com/silage-pushers/single-silagepusher-fixed? return=/silage-pushers

	Types	Description	Price
1	VBES	Without Attachment parts	€ 1.025,-
1	VBESV	Galvanised and adjustable wheel,	
		excluding attachments, but with plates	
		for attachments	€ 1.175,-
٧	VBESZ	Heavier version (6 holes wheel hub and	
		6 spoke construction.)	€ 1.300,-
	Options	Description	Price
V	BI	Bucket connection including steel angle	€ 375,-



(DVB) Double Silage pusher

Quick connect to shovel, telehandler, front end loader or feeder.

- No modifications to the bucket.
- Due to the special construction, the wheel is always rotating.
- It is possible to block the wheel, so the residual feed can be moved.
- Can be delivered with mounting parts and three-point connection.
- Standard delivery with adjustable bucket width.
- No maintenance due to the wheel hub construction.
- Weight DVB: ± 320 kg, Including wheels (assembled).
- Optional: DVBZ heavier version, 6 holes wheel hub and 6 spoke construction. Main tube 8mm instead of 4mm, side tubes 6mm instead of 4mm.
- Weight DVBZ: ± 500 kg. Including wheels (assembled).

For further information:

https://www.kempmachines.com/silage-pushers/double-silagepusher? return=/silage-pushers

	Types	Description	Pri	ce
V	DVBBI	With bucket connection	€ 1	1.625,-
٧	DVB	Without Bucket input, but prepared		
		for attachment parts	€ 1	1.550,-
\checkmark	DVBZBI	Heavier version with bucket input	€ 2	2.050,-
٧	DVBZ	Heavier version without bucket input,		
		but prepared for Attachment parts.	€ 1	l.975,-
			1	1
	Options	Description	Pri	ce
A	Options DVBM	Description Custom made for fork bucket	Pri €	ce 225,-
AA				
AA	DVBM	Custom made for fork bucket		
AAA	DVBM	Custom made for fork bucket Steel angle to clamp with the top	€	225,-
	DVBM HK	Custom made for fork bucket Steel angle to clamp with the top clamp of the bucket	€	225,-

attachment parts When ordering, please specify bucket width and width of the vehicle towards the dimensions of the wheels.

€ 400,-



(VVB) Silage pusher adjustable

Quick connect to shovel, telehandler, front end loader or feeder.

- No modifications to the bucket.
- Due to the special construction, the wheel is always rotating.
- It is possible to block the wheel the residual feed can be moved.
- Standard delivery with adjustable bucket width.
- No maintenance due to the wheel hub construction.
- Weight VVBD: ± 380 kg. Including wheels (assembled).
- Removable wheel hubs adjustable in width; necessary if wider wheels are fitted later.
- Completely galvanised
- Available with 1 wheel (VVBE) or with 2 wheels (VVBD).


For further information:

https://www.kempmachines.com/silage-pushers/silage-pusheradjustable? return=/silage-pushers

Types	Description	Price
VVBE	Single pusher, left or right operating	€ 1.700,-
VVBD	Double Silage pusher	€ 1.950,-

	Options	Description	Price	
٧	НК	Steel angle to clamp with the top clamp		
		of the bucket	€	175,-
٧	DVBB	Adjustable tube for bucket with cutting		
		plate	€	350,-
V	DVBA	DVBV with preparation for attachment		
		parts and forklift receiver (200*80*6)	€	450,-

When ordering, please specify bucket width and width of the vehicle towards the dimensions of the wheels.

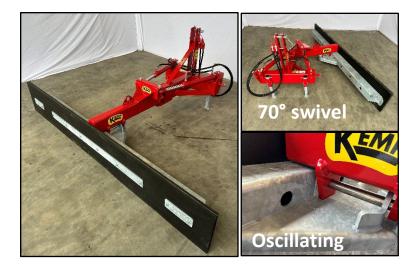

(RVSA) Rubber feed scraper on the back

Multifunctional rubber feed scraper can be moved feed, mud or manure.

- Both sides hydraulic movable due to the 2 cylinders with 1 doubleacting function.
- Due to the large swing angle, it is not possible that the feed stack.
- Solid construction with heavy pivot with Teflon coated bushes.
- Adjustable angles(optional).
- Weight ± 325 kg.
- Delivered with Cat. 2 mounting parts.


For further information:

https://www.kempmachines.com/rubber-scrapers/rubber-feedscraper-on-the-rear? return=/rubber-scrapers

	Types	Rubber	Price
\mathbf{A}	RVSA2844	2.800 x 400 x 40 mm	€ 2.400,-
\triangleright	RVSA2855	2.800 x 500 x 50 mm	€ 2.550,-
\triangleright	RVSA3244	3.200 x 400 x 40 mm	€ 2.500,-
\triangleright	RVSA3255	3.200 x 500 x 50 mm	€ 2.700,-

	Options	Description	Pri	ce
\succ	VH	Adjustable angles (manually)	€	200,-
\succ	SV	Shock valve for impact protection	€	125,-

Also available with forklift fork connection or accord.

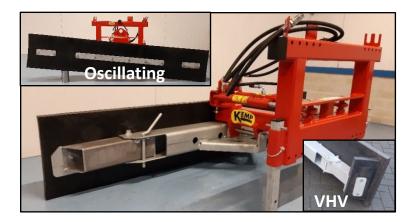

(RVS) Rubber feed scraper (painted)

- Can swivel both left and right 70°, due to 2 cylinders. Because of this the feed won't accumulate and it is possible to swivel while driving.
- The rubber strip can oscillate relative to the mounting frame for good ground adaptation and uniform wear of the rubber.
- Heavy pivot point with Teflon coated bushings.
- Comes with galvanised bar.
- Available in 5 widths and 2 types.


For further information:

https://www.kempmachines.com/rubber-scrapers/rubber-feedscraper-standard? return=/rubber-scrapers

RVSABM	RVSAB
For vehicles up to ± 2.000 kg	For vehicles up to ± 6.000 kg
Vehicles up to 1.600 mm width	Vehicles up to 2.600 mm width
Weight ± 225 kg	Weight ± 340 kg
Cylinders: 25*40*300	Cylinders: 35*50*350

	Types	Rubber	Price
\triangleright	RVSABM1844	1.800 x 400 x 40 mm	€ 1.800,-
\triangleright	RVSABM2244	2.200 x 400 x 40 mm	€ 1.875,-
\succ	RVSABM2544	2.500 x 400 x 40 mm	€ 2.000,-
\succ	RVSAB2555	2.500 x 500 x 50 mm	€ 2.350,-
\triangleright	RVSAB2855	2.800 x 500 x 50 mm	€ 2.475,-
\succ	RVSAB3255	3.200 x 500 x 50 mm	€ 2.600,-

	Options	Description	Price		
V	VH	Adjustable angles by hand	€ 200,-		
V	VHV	Extra rubber strengthening (only			
		with adjustable angles).	able angles). € 125		
\checkmark	SV	Shock valve for impact protection	€	125,-	
$\boldsymbol{\lambda}$	GT	Pilot operating non-return valve	€ 125,-		
\triangleright	SM	Throttle valve to control slewing	€ 100,-		

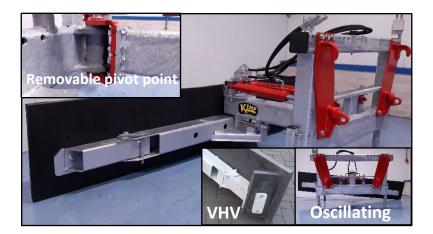

(RVS) Rubber feed scraper (galvanised)

- Can swivel both left and right 70°, due to 2 cylinders. Because of this the feed won't accumulate and it is possible to swivel while driving.
- The rubber strip can oscillate relative to the mounting frame for good ground adaptation and uniform wear of the rubber.
- Heavy pivot point with Teflon coated bushings.
- Middle part of the bar behind the rubber is 140*140*8 mm.
- Available in 5 widths and 2 types


For further information:

https://www.kempmachines.com/rubber-scrapers/galvanised-rubberfeed-scraper? return=/rubber-scrapers

RVSS	RVSL
For vehicles up to ± 2.000 kg	For vehicles up to ± 6.000 kg
Vehicles up to 1.600 mm width	Vehicles up to 2.600 mm width
Weight ± 260 kg	Weight ± 360 kg
Cylinders: 25*40*300	Cylinders: 35*50*350

	Types	Rubber	Price
٧	RVSS1844	1.800 x 400 x 40 mm	€ 2.025,-
٨	RVSS2244	2.200 x 400 x 40 mm	€ 2.075,-
V	RVSS2544	2.500 x 400 x 40 mm	€ 2.200,-
V	RVSL2555	2.500 x 500 x 50 mm	€ 2.650,-
V	RVSL2855	2.800 x 500 x 50 mm	€ 2.750,-
A	RVSL3255	3.200 x 500 x 50 mm	€ 2.900,-

	Options	Description	Price	
\triangleright	VH	Adjustable angles (manually)	€ 200,-	
\checkmark	VHV	Extra rubber strengthening (only		
		with adjustable angles).		125,-
\checkmark	SV	Shock valve for impact protection	€	125,-
\checkmark	GT	Pilot operating non-return valve	€	125,-
\triangleright	SM	Throttle valve to control slewing	€ 100,-	

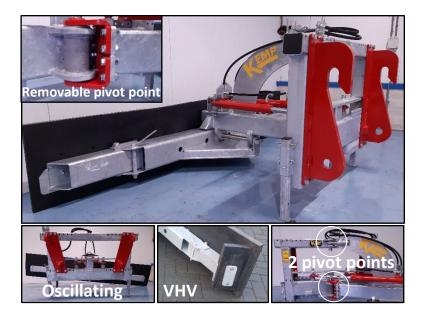

(RVSXL) Rubber feed scraper XL

Heavy design for intense heavy scraping work..

- Can swivel both left and right 70°, due to 2 cylinders. Because of this the feed won't accumulate and it is possible to swivel while driving.
- The rubber strip can oscillate relative to the mounting frame for good ground adaptation and uniform wear of the rubber.
- Heavy pivot point with Teflon coated bushings.
- Due to the second pivot point, the power is equally distributed.
- Additional pivot point above for support and extra strength.
- Middle part of the bar behind the rubber is 180*180*8 mm.
- Standard equipped with extra rubber strengthening at the sides. (VHV).
- Standard equipped with a shock valve.
- Weight RVSXL2855: 485 kg.

For further information:

https://www.kempmachines.com/rubber-scrapers/heavy-rubber-feedscraper? return=/rubber-scrapers

	Types	Rubber	Price
٨	RVSXL2855	2.800 x 500 x 50 mm	€ 3.400,-
٨	RVSXL3255	3.200 x 500 x 50 mm	€ 3.475,-
٧	RVSXL3455	3.400 x 500 x 50 mm (Only by	
		adjustable angles)	€ 3.850,-
٧	RVSXL3855	3.800 x 500 x 50 mm (Only by	
		adjustable angles)	€ 4.000,-

	Options	Description	Pri	се
\checkmark	VH180	Adjustable angles (manually) + (VHV)	€	300,-
V	GT	Pilot operating non-return valve	€	125,-
\checkmark	SM	Throttle valve to control slewing	€	100,-



(RVSMM) Rubber feed scraper Mini Mechanical

Perfect to work with mini loader, skid steer loader or forklift truck up to \pm 2.000 kg and max. 1.600 mm vehicle width.

- Quick connect to quick coupler or bucket with top clamp or forklift receiver.
- Due to a swing angle of 70°, the feed won't accumulate.
- In the feed scrape position, the scraper will hit a stop on the left and the right, so does not need to be blocked (can be).
- For straight scraping forward and two intermediate positions, can be blocked with spring pin.
- The rubber strip can oscillate relative to the mounting frame for good ground adaptation and uniform wear of the rubber.

For further information:

https://www.kempmachines.com/rubber-scrapers/mechanical-rubberfeed-scraper? return=/rubber-scrapers

	Types	Rubber	Price
\triangleright	RVSMM1844	1.800 x 400 x 40 mm	€ 1.450,-
\succ	RVSMM2244	2.200 x 400 x 40 mm	€ 1.500,-
\triangleright	RVSMM2544	2.500 x 400 x 40 mm	€ 1.600,-

	Options	Description	Price	
$\boldsymbol{\lambda}$	VH	Adjustable angles (manually)	€ 200,-	
A	VHV	Extra rubber strengthening (Only by adjustable angles).	€ 125,-	
\checkmark	BI	Bucket connection with steel angle	€	375,-
\checkmark	DHL	Removable Attachment parts	€ 150,-	



(RVSM) Rubber feed scraper mechanical

Quick connect, without come of the tractor, to loader, telehandler, or front end loader bucket with top clamp.


- No modifications to the bucket.
- Not necessary to connect hydraulic hoses
- Possibility to set in 5 positions without cylinders and lockable.
- Including steel angle to fix to the silage bucket. Also possible to deliver with build-on parts.
- **Pay attention!** The frame MUST BE fixed in the bucket with the top clamp, to avoid run out of the bucket. Also possible to deliver with build on parts.
- Weight ± 425 kg.

For further information:

https://www.kempmachines.com/rubber-scrapers/mechanical-rubber-feed-scraper? return=/rubber-scrapers

T	ypes	Rubber	Price
≻ R	VSM2855	2.800 x 500 x 50 mm	€ 2.625,-
≻ R	VSM3255	3.200 x 500 x 50 mm	€ 2.750,-

	Options	Description	Pri	ce
\checkmark	VH	Adjustable angles (manually)	€	200,-
V	RVSMBI	Bucket connection + steel angle	€ 300,-	
V	DVBB	Adjustable hollow sections for clamping the scraper to buckets with	th	
		cutting knife	€	350,-

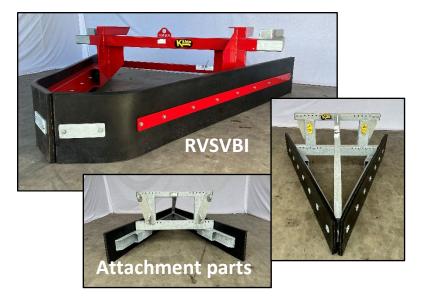

(RVSV) Rubber feed scraper V-shape

Quick connect to shovel, telehandler, front end loader or ground bucket.

- Deliverable with bucket connection and attachments parts.
- Strong and stable rubber scraper to scrape quickly a lot of feed.
- No modifications to the bucket needed.
- Weight 1.800 mm ± 200 kg.
- Weight 2.800 mm ± 390 kg.
- Types to 2.000 mm have an UNP140 profile behind the rubber. The two heavier types an UNP200.
- Types RVSV1600 RVSV2000 are completely galvanised.
- Types RVSV2400 and RVSV2800 are painted.

For further information:

https://www.kempmachines.com/rubber-scrapers/fixed-feedscraper? return=/rubber-scrapers

	Types	Description	Price	
٧	RVSV1600	Outside dimension 1.600 mm	€ 1.400,-	
\checkmark	RVSV1800	Outside dimension 1.800 mm	€ 1.500,-	
V	RVSV2000	Outside dimension 2.000 mm	€ 1.550,-	
V	RVSV2400	Outside dimension 2.400 mm	€ 1.875,-	
		(heavier version)		
٧	RVSV2800	Outside dimension 2.800 mm	€ 2.025,-	
		(heavier version)		
	Options	Description	Price	
\checkmark	RVSVBI	Bucket connection	€ 300,-	
\checkmark	нк	Steel angle to clamp with top clamp	€ 175,-	

For attachment parts see pages 61-65.

> DVBM

€

225,-

Custom fork bucket



(RSVB) Rubber bucket scraper

Quick connection to telehandler, front end loader or ground bucket. **RSVBS/RSVBL:** Hollow sections 140*140*6. Bucket insert 4 mm.

• Weight ± 280 kg.

RSVBXL: Hollow sections 180*180*8. Bucket insert 8 mm and 6 mm.

- Rubber strengthening at the end of the hollow sections.
- Weight ± 440 kg.

For further information:

https://www.kempmachines.com/rubber-scrapers/rubberbucket-scraper? return=/rubber-scrapers

	Types	Rubber	Working width	Price
	RSVBS2244	2.200 x 400 x 40	2.050	€ 1.150,-
	RSVBS2544	2.500 x 400 x 40	2.350	€ 1.225,-
\checkmark	RSVBL2844	2.800 x 400 x 40	2.600	€ 1.500,-
\checkmark	RSVBL2855	2.800 x 500 x 50	2.600	€ 1.625,-
V	RSVBL3244	3.200 x 400 x 40	3.000	€ 1.575,-
V	RSVBL3255	3.200 x 500 x 50	3.000	€ 1.725,-
V	RSVBXL2855	2.800 x 500 x 50	2.600	€ 2.125,-
\checkmark	RSVBXL3255	3.200 x 500 x 50	3.000	€ 2.250,-
\checkmark	RSVBXL3455	3.400 x 500 x 50	3.200	€ 2.375,-
$\mathbf{\lambda}$	RVSBXL3855	3.800 x 500 x 50	3.600	€ 2.550,-

	Options	Description	Pri	ce
\triangleright	НК	Steel angle to clamp with top of bucket	€	175,-
\triangleright	DVBB	Adjustable hollow sections for clamping		
		the scraper to buckets with cutting knife	€	350,-

Pay attention! The bucket must be at least 250 mm narrower than the working width due to the side hollow sections and backlash.

When ordering, please specify bucket width.



(RVSOKB) Rubber feed scraper with two brushes

Due to the two brushes it is possible to clean the feeding alley more intensively, even below the feeding rack.

- In a goat shed, for example, where hygiene is very important, this slide with brushes can provide labour relief.
- The brushes are mounted on the galvanised rubber feed scraper.
- With one double-acting valve it is possible move the brushes up and down and to rotate the brushes.
- The brushes are made of nylon and have a diameter of 750 mm. These brushes consist of 20 individual elements that are replaceable (see option LPNYV).
- An 1.000 mm brush is also possible on request.

For further information:

kempmachines.com

▶ RVSOKB2555 RVSL2555 including adjustable angles, 2 nd pivot point and 2 brushes. € 5.8 ▶ RVSOKB2855 RVSL2855 including adjustable	e 650,- 800,-
angles, 2 nd pivot point and 2 brushes. € 5.6 RVSOKB2555 RVSL2555 including adjustable angles, 2 nd pivot point and 2 brushes. € 5.8 RVSOKB2855 RVSL2855 including adjustable € 5.8	
▶ RVSOKB2555 RVSL2555 including adjustable angles, 2 nd pivot point and 2 brushes. € 5.8 ▶ RVSOKB2855 RVSL2855 including adjustable	
angles, 2 nd pivot point and 2 brushes. € 5.8 RVSOKB2855 RVSL2855 including adjustable	800,-
RVSOKB2855 RVSL2855 including adjustable	800,-
3 ,	
angles, 2 nd pivot point and 2 brushes. € 5.9	900,-
Options Description Pri	ice
> 6/2 With a double-acting valve, choice is	
between swivelling and rotating. € 3	350,-
> 8/3 With a double-acting valve, choice is	
between swivelling and operating the	
brushes independently. € 4	475,-
▶ LPNYV Individual elements for the LPNYV750 €5	,50,-



(RSVOKBD) Fixed rubber scraper with two brushes

Due to the two brushes it is possible to scrape and clean the yard or feeding alley more intensively. The dirt is automatically turned inwards and then remains against the rubber.

- The brushes are mounted on the fixed rubber scraper (RSVKS).
- With one double-acting valve it is possible move the brushes up and down and to rotate the brushes.
- Other possibilities on consultation.
- The brushes are made of nylon and have a diameter of 750 mm. These brushes consist of 20 individual elements that are replaceable (see option LPNYV).
- An 1.000 mm brush is also possible on request.
- Price exclusive attachment parts.

For further information:

kempmachines.com

Types	Description	Price
RSVOKBD2544	Mounted on the RSVKS2544	€ 4.250,-
RSVOKBD2844	Mounted on the RSVKS2844	€ 4.325,-

	Options	Description	Price
\triangleright	6/2	With a double-acting valve, choice	
		is between rotating and operating	
		the brushes independently.	€ 350,-
\succ	LPNYV	Individual elements for the	€5,50,-
		LPNYV750	



(RSVOKBZ) Fixed rubber scraper with one adjustable brush

Due to (hydraulically) adjustable brush to scrape and clean the yard or feeding alley more intensively.

- The brush is mounted on the fixed rubber scraper (RSVKS).
- Other possibilities on consultion.
- The brushes are made of nylon and have a diameter of 750 mm. These brushes consist of 20 individual elements that are replaceable. (See option LPNYV).
- An 1.000 mm brush is possible on request.

For further information:

kempmachines.com

	Types	Description	Price
\checkmark	RSVOKBZ2244	Mounted on the RSVKS2244	€ 3.625,-
٧	RSVOKBZ2544	Mounted on the RSVKS2544	€ 3.700,-
\checkmark	RSVOKBZ2844	Mounted on the RSVKS2844	€ 3.775,-

	Options	Description	Price
\succ	6/2	With two double-acting valves,	
		choice is between swivelling and	
		moving the brushes up and down.	€ 350,-
\succ	8/3	With one double-acting valve,	
		choice is between swivelling,	
		rotating, and moving the brushes	
		up and down.	€ 475,-
\succ	LPNYV	Individual elements for the	€5,50,-
		LPNYV750	



(KSLR) Silage scraper left and right

- Includes a rubber strip, so that the covering sheet isn't damaged.
- The slewing is hydraulically by means a double-acting cylinder.
- Because the silage scraper slew at the front, it is possible to scrape in little spaces and when you are not perpendicular to the silage.
- The pivot point is consists of 2 rotary buses which are positioned far from each other, to be able to take up a lot of strength.
- Equipped with a pressure relief valve.

For further information:

https://www.kempmachines.com/rubber-scrapers/silage-scraper-leftand-right-hydraulic? return=/rubber-scrapers

	Types	Working width (centre vehicle to end)	Price
A	KSLRS3500	3.500 mm (light version)	€ 3.050,-
V	KSLRL3500	3.500 mm (heavy version)	€ 3.450,-
	KSLRL4000	4.000 mm (heavy version)	€ 3.550,-







(KSV) Silage scraper fixed

- The KSVS (light version): suitable for mini-loaders, is made of tube 140x140x7 mm and the rubber is 1.000 mm long.
 - Weight 3.500 mm ± 225 kg.
 - Work width 3.000 and 3.500 mm.
- De KSVL (heavy version): suitable for larger loaders, are made of tube 180x180x8 mm and the rubber is 1,400 mm long.
 - Weight ± 325 kg.
 - Work width 3.500 and 4.000 mm.

For further information:

https://www.kempmachines.com/rubber-scrapers/silage-scraperfixed? return=/rubber-scrapers

	Types	Working width (Centre vehicle to end)	Price
\checkmark	KSVS3000	3.000 mm	€ 1.575,-
1	KSVS3500	3.500 mm	€ 1.625,-
1	KSVL3500	3.500 mm	€ 2.050,-
\triangleright	KSVL4000	4.000 mm	€ 2.100,-

For left and right use, attachment parts are calculated twice.







(KSDW) Silage scraper pushing model

With this scraper, the sand can be shove and also pushed to the side.

- Left and right slewable with two heavy cylinders with pressure relief valves.
- Delivered with rubber strip without steel-reinforced braid.
- Can also be used as grounds scraper to keep the yard mud and snow-free.
- Available in 2 versions: S for mini shovels and L for larger shovels, tractors, and telehandlers.
- Available with all attachments for (mini)loader, telehandler, and tractor.
- Price exclusive attachment parts.

For further information:

https://www.kempmachines.com/rubber-scrapers/silage-scraperpushing-model? return=/rubber-scrapers_

	Types	Description	Price
٧	KSDWS	Length : 1.600 mm	
		Rubber : 2.200 x 400 x 40 mm	€ 1.900,-
\checkmark	KSDWL	Length : 2.000 mm	
		Rubber : 2.800 x 500 x 50 mm	€ 2.550,-



(KSD) Silage scraper rotatable

This silage slide is designed to push up the sand on the silage.

- Machine can be used without dismounting.
- Pivot point is 2 x 90° rotatable, allowing pushing at any angle of the silage.
- Available in 2 versions: the **(KSDS)** for mini shovels and the **(KSDL)** for larger shovels, tractors and telehandlers.
- Available with all attachments for (mini) shovels, tractors and telehandlers.

For further information:

Types	Description	Price
KSDS	KSDS Length : 1.600 mm	
	width of sliding board: 1.000 x 500 mm	€ 1.675,-
KSDL	Length : 2.200 mm	
	width of sliding board: 1.600 x 700 mm	€ 2.250,-



(RVSKS) Rubber feed- and silage scraper

The all scraper. With this scraper; feed can be pulled up, the sand is pushed out of the silage, or moved. And muddy yards and snow can be removed.


- Equipped with 2 pivot points and 4 cylinders, therefore the scraper has a swing angle of 70°.
- The front cylinders are to scrape the yard and sand from the silage and the rear cylinders to scrape the feed. The scraper comes beside the tractor.
- When scraping the silage, it is possible to move the scraper out of the centre by the double pivots. Hereby it is possible to clean the silage further.
- The rubber can move relative to the frame for optimum ground adaptation and uniform wear of the rubber.
- Price exclusive attachment parts.
- The types RVSKS2244 and RVSKS2544 are standard equipped with the option VH.

For further information:

https://www.kempmachines.com/rubber-scrapers/rubber-feed--andsilage-scraper? return=/rubber-scrapers

	Types	Rubber	Price
\checkmark	RVSKSS2244	2.200 x 400 x 40 mm	€ 2.850,-
٧	RVSKSS2544	2.500 x 400 x 40 mm	€ 2.900,-
\triangleright	RVSKSL2855	2.800 x 500 x 50 mm	€ 3.095,-

	Options	Description	Price	
\checkmark	VH	Adjustable angles	€	200,-
\checkmark	SV	Shock valve for impact protection (2x)	€	250,-
\checkmark	GT	Pilot operating non-return valve (2x)	€	125,-
V	3-WEG	3-way ball valve (at one double-acting		
		function on vehicle)	€	150,-
V	6/2	Electrical 6/2 hydraulic valve	€	350,-

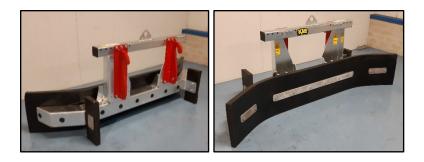

(RSVKS) Fixed rubber scraper (light version)

Perfect for moving food residues, mud, manure, snow and similar.

- Available with mounting parts for (mini) shovels and tractors, telehandlers, forklifts, cranes and others.
- Delivered with a rubber support leg, not necessary to retract a support leg. Without coming of the tractor, hitch on and off.
- Completely galvanised.
- The bar behind the rubber is hollow sections 140*140*6 mm.
- Weight RSVKS2844 ± 200 kg

For further information:

https://www.kempmachines.com/rubber-scrapers/heavy-fixed-rubberscraper?_return=/rubber-scrapers

	Types	Rubber	Working	Full	Steel inlay
		height	width	rubber	
\checkmark	RSVKS1444	400 mm	1.300 mm	€ 1.050,-	
\checkmark	RSVKS1443	400 mm	1.300 mm		€ 1.100,-
\checkmark	RSVKS1844	400 mm	1.650 mm	€ 1.075,-	
\checkmark	RSVKS1843	400 mm	1.650 mm		€ 1.125,-
\wedge	RSVKS2244	400 mm	2.050 mm	€ 1.125,-	
\triangleright	RSVKS2243	400 mm	2.050 mm		€ 1.175,-
\triangleright	RSVKS2544	400 mm	2.350 mm	€ 1.175,-	
\checkmark	RSVKS2543	400 mm	2.350 mm		€ 1.225,-
\checkmark	RSVKS2844	400 mm	2.600 mm	€ 1.225,-	
\checkmark	RSVKS2843	400 mm	2.600 mm		€ 1.275,-
\triangleright	RSVKS2855	500 mm	2.650 mm	€ 1.350,-	
\checkmark	RSVKS2853	500 mm	2.650 mm		€ 1.350,-
\checkmark	RSVKS3043	400 mm	2.850 mm		€ 1.325,-
\wedge	RSVKS3053	500 mm	2.850 mm		€ 1.425,-
\succ	RSVKS3244	400 mm	3.050 mm	€ 1.300,-	
\triangleright	RSVKS3243	400 mm	3.050 mm		€ 1.375,-
\checkmark	RSVKS3255	500 mm	3.050 mm	€ 1.450,-	
\triangleright	RSVKS3253	500 mm	3.050 mm		€ 1.525,-



(RSVKL) Fixed rubber scraper (heavy version)

Perfect for moving food residues, mud, manure, snow, recycling waste, chips and similar.

- Without come of the tractor, hitch on and off. Delivered with a rubber support leg, not necessary to retract a support leg.
- Available with mounting parts for (mini) shovels and tractors, telehandlers, forklifts, cranes and others.
- Every version is deliverable with full rubber and rubber with steel reinforced braid.
- The bar behind the rubber is a hollow sections of 180*180*8 mm.
- Weight RSVKL3855 430 kg.
- Completely galvanised.
- Surcharge for rubber with double steel insert RSVKL3453: €550,-
- Surcharge for rubber with double steel insert RSVKL3855: €625,-

For further information:

https://www.kempmachines.com/rubber-scrapers/heavy-fixed-rubberscraper? return=/rubber-scrapers

	Types	Rubber	Working	Full rubber	Steel inlay
		length	width		-
٧	RSVKL2555	500	2.350 mm	€ 1.725,-	
٧	RSVKL2553	500	2.350 mm		€ 1.725,-
٧	RSVKL2855	500	2.600 mm	€ 1.825,-	
V	RSVKL2853	500	2.600 mm		€ 1.825,-
V	RSVKL3053	500	2.850 mm		€ 1.875,-
٧	RSVKL3255	500	3.050 mm	€ 1.825,-	
٧	RSVKL3255	500	3.050 mm		€ 1.925,-
V	RSVKL3455	500	3.200 mm	€ 2.025,-	
٧	RSVKL3453	500	3.200 mm		€ 2.125,-
V	RSVKL3855	500	3.600 mm	€ 2.175,-	
Y	RSVKL3853	500	3.600 mm		€ 2.275,-



(RSVKD) Fixed rubber scraper with extra volume


The RSVKD is basically comparable to the RSVK, only it has an extra kink in the bar, which generates even more volume.

- Easily to connect and disconnect to the quick coupler, without getting off.
- Weight RSVKDS2844 ± 200 kg

For further information:

https://www.kempmachines.com/agriculture/rubber-fixed-scraperwith-extra-volume--rsvkd-?_return=/agriculture

	Types	Rubber length	Working width	Full rubber	Steel inlay
	RSVKSD2244	400 mm	1.800 mm	€ 1.275,-	
	RSVKSD2243	400 mm	1.800 mm		€ 1.325,-
	RSVKSD2844	400 mm	2.350 mm	€ 1.375,-	
A	RSVKSD2843	400 mm	2.350 mm		€ 1.425,-
A	RSVKSD2855	500 mm	2.350 mm	€ 1.500,-	
A	RSVKSD2853	500 mm	2.350 mm		€ 1.500,-
A	RSVKSD3244	400 mm	2.750 mm	€ 1.450,-	
	RSVKSD3243	400 mm	2.750 mm		€ 1.525,-
	RSVKSD3255	500 mm	2.750 mm	€ 1.600,-	
A	RSVKSD3253	500 mm	2.750 mm		€ 1.675,-
7	RSVKLD3855	500 mm	3.100 mm	€ 2.375,-	
7	RSVKLD3853	500 mm	3.100 mm		€ 2.475,-



(RSVKSLI) Fixed rubber scraper with forklift receiver

Fixed rubber scraper equipped with forklift receiver.

- The bar behind the rubber is 140*140*6 mm.
- Standard delivered with forklift receiver. The hollow sections are 200*80*6 mm.
- Completely galvanised.

For further information:

	Types	Rubber	Working	Full	Steel inlay
		height	width	rubber	
	RSVKSLI 1444	400 mm	1.300 mm	€ 950,-	
	RSVKSLI 1443	400 mm	1.300 mm		€ 1.100,-
	RSVKSLI 1844	400 mm	1.650 mm	€ 975,-	
	RSVKSLI 1843	400 mm	1.650 mm		€ 1.025,-
	RSVKSLI 2244	400 mm	2.050 mm	€ 1.025,-	
	RSVKSLI 2243	400 mm	2.050 mm		€ 1.075,-
	RSVKSLI 2544	400 mm	2.350 mm	€ 1.075,-	
	RSVKSLI 2543	400 mm	2.350 mm		€ 1.125,-
	RSVKSLI 2844	400 mm	2.600 mm	€ 1.125,-	
	RSVKSLI 2843	400 mm	2.600 mm		€ 1.175,-
	RSVKSLI 2855	500 mm	2.650 mm	€ 1.250,-	
	RSVKSLI 2853	500 mm	2.650 mm		€ 1.250,-
	RSVKSLI 3043	400 mm	2.850 mm		€ 1.225,-
	RSVKSLI 3053	500 mm	2.850 mm		€ 1.325,-
A	RSVKSLI 3244	400 mm	3.050 mm	€ 1.200,-	
A	RSVKSLI 3243	400 mm	3.050 mm		€ 1.275,-
V	RSVKSLI 3255	500 mm	3.050 mm	€ 1.350,-	
A	RSVKSLI 3253	500 mm	3.050 mm		€ 1.425,-

	Options	Description	Price
\triangleright	LIAKS	Forklift receiver + prepared for	
		attachment parts light version	€ 400,-



(RSVKLLI) Fixed rubber scraper with forklift receiver

Fixed rubber scraper equipped with forklift receiver.

- The bar behind the rubber is 180*180*8 mm.
- Standard delivered with forklift receiver. The hollow sections are 200*100*8 mm.
- Completely galvanised.

For further information:

https://www.kempmachines.com/agriculture/heavy--fixed-rubberscraper-for-forklift--rsvkli-? return=/agriculture

	Types	Rubber	Working	Full	Steel inlay
		height	width	rubber	
$\mathbf{\lambda}$	RSVKLLI 2555	500 mm	2.350 mm	€ 1.525,-	
$\mathbf{\lambda}$	RSVKLLI 2553	500 mm	2.350 mm		€ 1.575,-
$\mathbf{\lambda}$	RSVKLLI 2855	500 mm	2.600 mm	€ 1.675,-	
$\boldsymbol{\lambda}$	RSVKLLI 2853	500 mm	2.600 mm		€ 1.675,-
$\mathbf{\lambda}$	RSVKLLI 3053	500 mm	2.850 mm		€ 1.725,-
$\mathbf{\lambda}$	RSVKLLI 3255	500 mm	3.050 mm	€ 1.675,-	
$\mathbf{\lambda}$	RSVKLLI 3253	500 mm	3.050 mm		€ 1.775,-
	RSVKLLI 3455	500 mm	3.200 mm	€ 1.875,-	
\checkmark	RSVKLLI 3453	500 mm	3.200 mm		€ 1.975,
	RSVKLLI 3855	500 mm	3.600 mm	€ 2.025,-	
\checkmark	RSVKLLI 3853	500 mm	3.600 mm		€ 2.125,-

	Options	Description	Price
٧	LIAKL	Forklift receiver + prepared for	
		attachment parts heavy version	€ 550,-



(RSVKLI) Fixed rubber scraper with forklift receiver + excavator attachment

These rubber scrapers are fitted with forklift receiver + attachment for excavators, when ordering please provide the scraper order code and the attachment order code.

For further information:

	Types	Rubber- height	Working width	Hollow sections	Rubber with steel inlay
\succ	RSVKSLI 1843	400 mm	1.650 mm	140x140x6	€ 1.025,-
\checkmark	RSVKSLI 2243	400 mm	2.350 mm	140x140x6	€ 1.075,-
\checkmark	RSVKSLI 2543	500 mm	2.350 mm	140x140x6	€ 1.125,-
\checkmark	RSVKLLI 2553	500 mm	2.600 mm	180x180x8	€ 1.575,-
\checkmark	RSVKLLI 2853	500 mm	2.600 mm	180x180x8	€ 1.675,-
V	RSVKLLI 3053	500 mm	2.850 mm	180x180x8	€ 1.725,-
	RSVKLLI 3253	500 mm	3.050 mm	180x180x8	€ 1.775,-

	Opname	Beschrijving	Prijs
\triangleright	CW-H05	Forklift receiver + CW-05 hammer	€ 200,-
		attachment	
٧	CW-H10	Forklift receiver + CW-10 hammer	€ 200,-
		attachment	
٧	CW-H20/30	Forklift receiver + CW-20/30	€ 300,-
		hammer attachment	
\checkmark	AEN45	Forklift receiver + Engcon S45	€ 300,-
		attachment	
\checkmark	AEN60	Forklift receiver + Engcon S60	€ 350,-
		attachment	




(URSK) Fixed rubber scraper 3-point

- Equipped with CAT 1 and 2 and forklift receiver
- Standard with full rubber (40 cm high)
- Option steel inlay + €50,-

For further information:

https://www.kempmachines.com/rubber-scrapers/fixed-rubberscraper-3-point?_return=/rubber-scrapers

	Types	Rubber	Working width	Price	
Y	URSK1800	1.800x400x40 mm	1.650 mm	€ 1.150,-	
Y	URSK2200	2.200x400x40 mm	2.050 mm	€ 1.200,-	
A	URSK2500	2.500x400x40 mm	2.350 mm	€ 1.250,-	
A	URSK2700	2.700x400x40 mm	2.600 mm	€ 1.300,-	
A	URSK3000	3.000x400x40 mm	2.850 mm	€ 1.425,-	
A	URSK3200	3.200x400x40 mm	3.050 mm	€ 1.475,-	

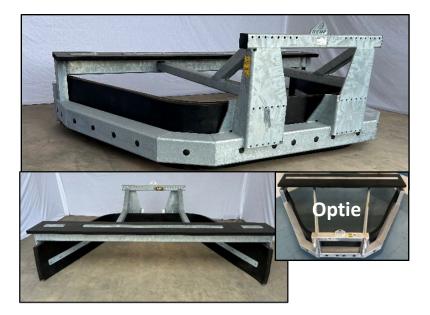

(RMS) Manure scraper

With the manure scraper, manure can be removed from slatted floors.

- The Manure scraper is standard equipped with a buck where the attachment parts are being attached to.
- The manure slide has a rubber that is 500 mm high and 50 mm thick.
- Optional: It is possible to order a rubber slide on top of the manure scraper, which makes it easier to remove the manure along walls.
- Completely galvanised.
- Weight RMS2900 ± 625 kg.

For further information:

https://www.kempmachines.com/rubber-scrapers/manurescraper? return=/rubber-scrapers

	Types	Working width ±	Price
\triangleright	RMS2000	2.000 mm en depth 1.200 mm	€ 2.300,-
\triangleright	RMS2500	2.500 mm en depth 1.350 mm	€ 2.500,-
\succ	RMS2900	2.900 mm en depth 1.500 mm	€ 2.800,-

	Options	Description	Price	
\triangleright	RMST	Rubber scraper on top	€	950,-




(RMSHV) Rubber scraper adjustable angles

- The Manure scraper is standard equipped with a buck where the attachment parts are being attached to.
- The RMSHVS (light version) is equipped with a rubber of 400 mm high and 40 mm thick.
- The RMSHVL/XL (heavy version) is equipped with a rubber of 500 mm high and 50 mm thick.
- Equipped with hydraulically adjustable corners, this allows you to adjust the width of the slide at any time, thus adapting it to different stables.
- Standard delivered with 4x oil hose.
- Completely galvanised.

For further information:

	Types	Description	Price
V	RMSHVS	Hydraulic adjustable angles	
		(1.200 tot 2.400 mm)	€ 3.350,-
V	RMSHVL	Hydraulic adjustable angles	
		(1.600 tot 3.500 mm)	€ 4.100,-
\checkmark	RMSHVXL	Hydraulic adjustable angles	
		(2.500 tot 5.000 mm)	€ 5.200,-

	Options	Description	Price	
\triangleright	GLGT	Bij een dubbelwerkend ventiel:	€	300,-
		Gelijkloopventiel en terugslagklep		

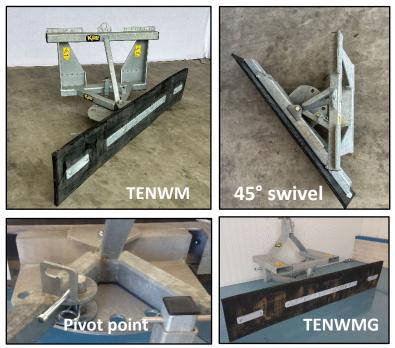

(TenWM) Yard scraper mechanical 140 series

(not to scrape feed)

Perfect rubber yard scraper to scrape mud, manure, and snow.


- Delivered with rubber with steel reinforced braid.
- Easy to hitch to the quick coupling, forklift receiver or 3-point.
- The scraper can slew 45° to both sides and can be locked in 5 positions.
- Robust pivot with grease nipple and a locking pin stainless steel.
- Standard equipped with adjustable angles.
- Completely galvanised
- Weight ± 200 kg.
- TenWM is intended for attachment parts.
- TenWG for forklift receiver, hollow sections 200*80 mm and CAT 1, and 2.

For further information:

https://www.kempmachines.com/yard-scrapers/yard-scrapermechanical?_return=/yard-scrapers

	Types	Rubber	Price
A	TENWM1843	1.800 x 400 x 32 mm	€ 1.500,-
٧	TENWM2243	2.200 x 400 x 32 mm	€ 1.575,-
٧	TENWM2543	2.500 x 400 x 32 mm	€ 1.625,-
$\mathbf{\lambda}$	TENWM2743	2.700 x 400 x 32 mm	€ 1.700,-

	Types	Rubber	Price	
٨	TENWMG2243	2.200 x 400 x 32 mm	€ 1.575,-	
٨	TENWMG2543	2.500 x 400 x 32 mm	€ 1.625,-	
V	TENWMG2743	2.700 x 400 x 32 mm	€ 1.700,-	
For attackment name coo pages 61.65				

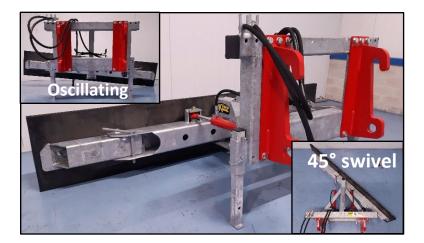

(TenWS) Yard scraper hydraulic

(not to scrape feed)

Perfect rubber yard scraper to scrape mud, manure, and snow. (standard delivered with rubber with steel reinforced braid).

- The bar with the rubber of the scraper can be tilted relative to the frame, so there is always an optimum ground adaptation and uniform wear of the rubber.
- This scraper can slew 45° to both sides.
- Standard equipped with adjustable angles.
- Complete galvanised.
- Weight TenWS2243 225 kg.

For further information:

https://www.kempmachines.com/yard-scrapers/hydraulically-yardscraper?_return=/yard-scrapers

	Types	Rubber	Note	Price	
Y	TENWS1843	1.800 x 400 x 32 mm	1 cylinder	€ 1.600,-	
٧	TENWS2243	2.200 x 400 x 32 mm	2 cylinders	€ 1.750,-	
\checkmark	TENWS2543	2.500 x 400 x 32 mm	2 cylinders	€ 1.800,-	
\checkmark	TENWS2743	2.700 x 400 x 32 mm	2 cylinders	€ 1.875,-	

	Options	Description	Price	
V	GT	When the vehicle has an open		
		centre valve: Pilot operating non-		
		return valve	€	125,-
\checkmark	SV	Shock valve with 2 cylinders	€	125,-
٨	2-CIL	2 cylinders at 1.800 mm	€	125,-
٧	TENWS500	Rubber strip with steel inlay 500		
		height	€	100,-
V	SK650	Snow cover removable	€	800,-



(TenWL) Heavy yard scraper hydraulic

(not to scrape feed)

Rubber scraper to hold your yard and roads clean and free of snow.

- Hydraulic 45° pivotable with 2 double-acting cylinders.
- The bar with the rubber of the scraper can be tilted relative to the frame, so there is always an optimum ground adaptation and uniform wear of the rubber.
- Delivered with rubber strip with steel inlay 500 mm height.
- Complete galvanised.
- Weight ± 325 kg.

For further information:

https://www.kempmachines.com/yard-scrapers/hydraulically-yardscraper? return=/yard-scrapers

	Types	Rubber	Note	Price
À	TENWL2753	2.700 x 500 x 32	Adj. angles	€ 2.550,-
	TENWL3053	3.000 x 500 x 38	Adj. angles	€ 2.750,-
\triangleright	TENWL3253	3.200 x 500 x 38	Adj. angles	€ 2.925,-

	Options	Description Price		
\checkmark	GT	Pilot operating non-return valve	€	125,-
\checkmark	SV	Shock valve for impact protection	€	125,-
\checkmark	SK800	For snow clearing removable		
		800mm rubber increasing part	€	950,-

For **attachment parts** see pages 61-65, Also for 3-point and/or combined with forklift receiver.



(TenWXL) Yard scraper hydraulic XL

(not to scrape feed)

Rubber scraper to clean your terrain and roads and remove snow.

- Hydraulic 45° pivotable with 2 double-acting cylinders.
- The bar is manufactured out of 180*180*8 mm hollow sections
- Galvanised bar with adjustable angles.
- Rubber strip with steel inlay 500 mm height.
- The 3.400 and 3.800 mm have larger adjustable angles, therefore these two have a larger volume.
- Standard equipped with a shock valve.
- Weight ± 550 kg.

For further information:

https://www.kempmachines.com/yard-scrapers/hydraulically-yardscraper-heavy? return=/yard-scrapers

	Types	Rubber	Note	Price
\mathbf{A}	TENWXL2753	2.700 x 500 x 32	Adj. angles	€ 3.300,-
	TENWXL3053	3.000 x 500 x 38	Adj. angles	€ 3.400,-
	TENWXL3253	3.200 x 500 x 38	Adj. angles	€ 3.500,-
	TENWXL3453	3.400 x 500 x 38	Adj. angles	€ 3.700,-
\checkmark	TENWXL3853	3.800 x 500 x 38	Adj. angles	€ 3.900,-

	Options	Description	Pri	ice
٧	GT	When vehicle have open centre		
		valve: Pilot operating non return		
		valve	€	125,-
V	SK800XL	For snow clearing removable		
		800mm rubber increasing part	€	1.100,-



(TenWK) Heavy yard scraper hydraulic short model

Extra short version with 3-point mounting parts.

- The right rubber scraper to clean your terrain and roads and remove snow (only for a front lift).
- Hydraulic 45° pivotable with 2 double-acting cylinders.
- The bar with the rubber of the scraper can be tilted relative to the frame, so there is always an optimum ground adaptation and uniform wear of the rubber.
- Delivered with rubber strip with steel inlay.
- Length of front rubber to centre lifting ball is 750 mm. This is 400 mm shorter than the regular TenW.
- Standard equipped with a shock valve.
- Weight TenWK2753 ± 350 kg.

For further information:

https://www.kempmachines.com/yard-scrapers/hydraulically-yardscraper-short?_return=/yard-scrapers

Types	Rubber	Note	Price
TENWK2753	2.700 x 500 x 32	Adj. angles	€ 2.750,-
TENWK3053	3.000 x 500 x 38	Adj. angles	€ 2.950,-
TENWK3253	3.200 x 500 x 38	Adj. angles	€ 3.075,-

	Options	Description Price		e
\triangleright	GT	Pilot operating non-return valve	€	125,-
\triangleright	SK800	For snow clearing: removable		
		800mm rubber shield	€	950,-









(BK) Light bale clamp

A light grabber especially for mini shovels, light tractors (80 hp) and skid steer loaders.

- Because there is only one bale caught at a time, we were able to construct this grabber light.
- Suitable for round and square bales.
- 2 sliding tubes each arm made of 8 mm thick steel 52.
- Clamping tubes bent out of one piece 6.3 mm thickness steel.
- Cylinder size 30x50x700 mm.
- Height brackets 370 mm, tube Ø76 x 6,3 mm.
- Weight ± 210 kg.
- Price with hoses and 'male' connection, without attachment parts.

For further information:

https://www.kempmachines.com/bale-grabbers/light-baleclamp? return=/bale-grabbers

	Types	Clamping range	Price
\triangleright	BK2100	700 – 2.100, sliding tubes 8 mm	€ 1.895,-

	Options	Description	Price	
٧	GT	Pilot operating non-return valve		
		(needed at open centre and internal		
		leakage control valve)	€ 125,-	
٧	ov	At working pressure above 225 bar,		
		then install a pressure relief valve	€ 125,-	
$\boldsymbol{\lambda}$	DHL	Removable mounting parts	€ 150,-	



(BKS) Bale clamp standard

With this clamp, most bales can be caught. It's a simple clamp for round and square bales, suitable for tractors, wheel loaders, and telehandlers. To build on front end loader, lifting mast or three-point.

- Cylinder dimensions 25 x 50 x 750/900 mm.
- 2 Sliding tubes each clamping arm made of 8 mm steel 52.
- Height brackets 370 mm, tube Ø76x6,3 mm.
- Weight of standard grabber ± 320 kg.
- Price with hoses and 'male' connection, without attachment parts.

For further information:

https://www.kempmachines.com/bale-grabbers/standard-baleclamp? return=/bale-grabbers

	Types	Clamping range	Price
	BKS2200	700 – 2.200	€ 1.925,-
\triangleright	BKS2600	800 - 2.600	€ 2.075,-

	Options	Description	Pri	ice
٧	GT	Pilot operating non-return valve		
		(needed at open centre and internal		
		leakage control valve)	€	125,-
٧	ov	At working pressure above 225 bar,		
		then install a pressure relief valve	€	125,-
$\boldsymbol{\lambda}$	REK	Rack for 2e bale removable	€	200,-









(BKC) Bale clamp compact


This clamp is a heavier model than the bale grabber standard (BKS).

- To build on front end loader, lifting mast or three-point.
- Extra strengthening in the brackets by welded strip (15 mm). (1)
- Plastic guide in the four tubes, therefore maintenance-free.
- Cylinder dimensions 25 x 50 x 750/900 mm.
- 2 Sliding tubes each clamping arm made of 8 mm steel 52.
- Height brackets 480 mm, tube Ø70 x 6,3 mm.
- Weight of compact grabber ± 350 kg.
- Price with hoses and 'male' connection, without attachment parts. For further information:

https://www.kempmachines.com/bale-grabbers/compact-baleclamp?_return=/bale-grabbers

	Types	Clamping range	Price
\triangleright	BKC2200	700 – 2.200	€ 2.450,-
\triangleright	BKC2500	700 – 2.500	€ 2.650,-
\triangleright	BKC2600	800 - 2.600	€ 2.650,-

	Options	Description	Price	
V	GT	Pilot operating non-return valve		
		(needed at open centre and internal		
		leakage control valve)	€	125,-
\checkmark	OV	At working pressure above 225 bar,		
		then install a pressure relief valve	€	125,-
V	REK	Rack for 2e bale removable	€	200,-
\checkmark	DHL	Removable mounting parts	€	150,-

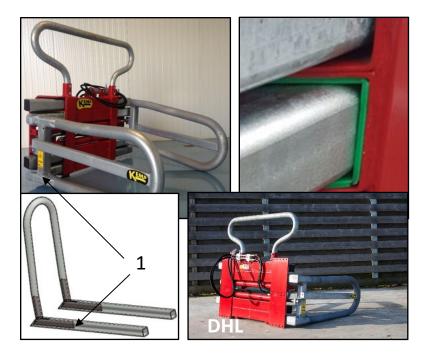

(BKZ) Bale clamp heavy

Heavy-constructed grabber for shovels, telehandlers, heavy lifting masts, and similar

- Pilot operated non-return valve and rack for 2nd bag.
- Cylinder dimensions 35 x 60 x 700/800/900 mm.
- Sliding tubes of the clamping arm made of 8 mm steel 52.
- Clamping tubes are bent out of one piece, tube Ø76 x 6,3 mm thickness steel and extra stiffeners.
- Extra strengthening in the brackets by welded strip (20 mm). (1)
- Plastic guide in the four tubes, therefore maintenance-free.
- Height brackets 480 mm.
- Weight 450 kg.
- Price with hoses and 'male' connection, without attachment parts.

For further information:

https://www.kempmachines.com/bale-grabbers/heavy-baleclamp? return=/bale-grabbers

	Types	Clamping range	Price
\rightarrow	BKZ2300	700 – 2.300	€ 2.900,-
\rightarrow	BKZ2500	700 – 2.500	€ 3.100,-
\succ	BKZ2600	800 – 2.600	€ 3.050,-

	Options	Description	Price
A	DHZ	Removable mounting parts	€ 200,-
٧	ov	At working pressure above 225 bar,	
		then install a pressure relief valve	€ 125,-



(BKZXL) Bale clamp XL

A robust grabber for if there are many bales must be moved.

- Heavy-duty mainframe in which plastic guiding strips are placed. Due to these strips, there is minimal wear, while sliding. There is no need to be lubricated
- Standard equipped with a rack for 2nd bale, pilot-operated non-return valve, and pressure relief valve.
- Cylinder dimensions 40 x 70 x 900 mm.
- Weld-on parts for tractors, wheel loaders, and telehandlers.
- Sliding tubes of the clamping arm made of 10 mm steel 52.
- Clamping tubes are bent out of one piece, 8 mm thick steel and extra stiffeners (25 mm strip) (1). Height of the clamping tube is 600 mm.
- Weight ± 595 kg.
- Double model. Clamping range 900-1800 mm, mechanical adjustable to 1.100 2.100 mm.
- Price with hoses and 'male' connection, without attachment parts.

For further information:

https://www.kempmachines.com/bale-grabbers/heavy-bale-clampxl?_return=/bale-grabbers

	Types	Clamping range	Price
	BKZXL2500	700 – 2.500	€ 4.200,-
	BKZXL2600	800 - 2.600	€ 4.100,-
\triangleright	BKZXLD	Double model	€ 6.300,-



(BKGK) Bale clamp with large clamping range

Due to the big range, the bale grabber is suitable for mini bales or large bales of hay or straw as well for bundle bales.

- Also available with removable extension brackets.
- Standard equipped with pressure relief valve
- Can also be supplied with removable middle bracket.
- Weight ± 420 kg.
- Price with hoses and 'male' connection, without attachment parts.


For further information:

https://www.kempmachines.com/bale-grabbers/bale-clamp-withlarge-range? return=/bale-grabbers

Types	Clamping range	Price
BKGK	700 – 2.700	€ 3.625,-

	Options	Description	Price
\triangleright	BLB	Long brackets fixed (2 meters)	€ 250,-
\succ	BVB	Removable extension brackets	€ 750,-
\succ	BDMB	Removable middle bracket	€ 500,-
\triangleright	GT	Pilot operating non-return valve	€ 125,-
\triangleright	GL	Synchronous valve	€ 150,-
\triangleright	REK	Rack for second bale removable	€ 200,-
\succ	DHZ	Removable mounting parts	€ 200,-

Other sizes/models on request, for attachment parts see pages 61-65.

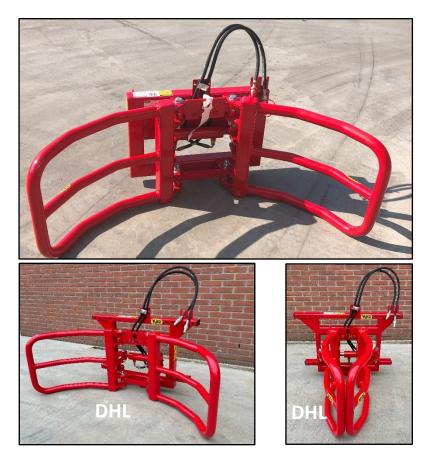

(BKROM) Round Bale clamp mini

The round bale clamp mini is suitable for mini shovels and mini tractors.

- Due to the shape of the bracket, suitable for bales of different sizes.
- Equipped with one double-acting cylinder, providing pendulum operation.
- Due to the short build length of this machine, the weight is short on the vehicle, that provides more lifting power.
- The clamp brackets are 4 mm thick.
- Price with hoses and 'male' connection, without attachment parts.
- Standard equipped with removable mounting parts.

For further information:

BKROM	
For bales til 400 kg	
For bales of Ø300-850 mm.	
Weight ± 90 kg	

	Types	Description	Price
\triangleright	BKROM	Clamping range of 300-850 mm	€ 1.350,-



(BKROL) Light round Bale clamp

A round bale grabber for use with mini shovels and light tractors. Due to the shape of the clamping brackets suitable for bales of different sizes.

Because the cylinders are positioned on the outside, the result is a minimum force and wear at the pivot point.

The machine is built in a very compact design, so the weight is close to the vehicle, which promotes lifting capacity.

Clamping brackets 5mm thickness.

Due to the slotted hole, it is easy to grab a bale.

Price with hoses and 'male' connection, without attachment parts. For further information:

https://www.kempmachines.com/bale-grabbers/light-round-balegrabber? return=/bale-grabbers

BKROL 1.100	BKROL 1.400
For bales up to 1.000 kg	For bales up to 1.100 kg
For bales of Ø700-1.100 mm.	For bales of Ø700-1.400 mm.
Max. open 1.400mm	Max. open 1.600mm
Weight ± 150 kg	Weight ± 170 kg

	Types	Description	Price
\triangleright	BKROL1100	Bales up to Ø 1.100 mm	€ 1.400,-
\triangleright	BKROL1400	Bales up to Ø 1.400 mm	€ 1.500,-

	Options	Description	Pri	се
\triangleright	DHL	Removable mounting parts	€	150,-
\triangleright	OV	At working pressure above 225 bar,		
		then install a pressure relief valve	€	125,-
\triangleright	GT	Pilot operating non-return valve	€	125,-
-				



(BKRO) Round Bale clamp

The heavier version, for use on wheel loaders, telehandlers, and tractors.

- Due to the shape of the clamping brackets suitable for bales of different sizes.
- Because the cylinders are positioned on the outside, the result is a minimum force and wear at the pivot point.
- The machine is built in a very compact design, so the weight is close to the vehicle, which promotes lifting capacity.
- Clamp with 4 cylinders, clamping brackets 6mm thickness.
- Suitable for bales up to 1.800 kg.
- Clamping range of otin 700 1.600 mm. Max. open 2.000 mm.
- Due to the slotted hole, it is easy to grab a bale.
- Weight 295 kg.
- Also deliverable as Double version
- Price with hoses, non-return valve and 'male' connection, without attachment parts.

For further information:

https://www.kempmachines.com/bale-grabbers/round-balegrabber? return=/bale-grabbers

	Types	Description	Price
\triangleright	BKRO	Single version	€ 2.300,-
\triangleright	BKROD	Double version	€ 3.950,-

	Options	Description	Price	
\wedge	DHL	Removable mounting parts	€	150,-
A	ov	At working pressure above 225 bar, then install a pressure relief valve	€	125,-
\triangleright	REK	Removable rack for second bale	€	300,-
\triangleright		90° rotating head	Or	Request



(BKROZ) Heavy round bale clamp

Large clamping range of Ø 700 – 1.900 mm, can also hold small and large bales of 1.800 mm round. Max width 2.250 mm.

- This grabber is provided with movable clamping arms so that the bale is always maximum clamped around.
- Equipped with a piloted check valve so that the bale always hangs quietly.
- The double version is provided with sliding tubes in plastic guide with movable clamping arms.
- Weight single version ± 560 kg.
- Weight double version ± 925 kg.
- Suitable for bales up to 2.200 kg.
- Price with hoses and 'male' connection, without attachment parts.

For further information:

https://www.kempmachines.com/bale-grabbers/heavy-round-balegrabber? return=/bale-grabbers

	Types	Description	Price
\succ	BKROZ	Single version	€ 3.850,-
\triangleright	BKROZD	Double version	€ 6.800,-

	Options	Description	Price
\checkmark	DHZ	Removable mounting parts	€ 200,-
\checkmark	ov	At working pressure above 225 bar,	
		then install a pressure relief valve	€ 125,-
1	REK	Removable rack for second bale	€ 300,-



(BD) Bale transporter

Heavy bale transporter to transport round bales.

- Both sides of the BDD are hydraulic slidable, so that the bale does not get damaged when the bales are being transported.
- Ideal for marshy grassland.
- Fast and cheap way to transport bales.
- Double version: Plastic guide in the tubes.
- Standard equipped with 3-point mounting parts.
- Weight BDE: 160 kg.
- Weight BDD: 280 kg.

For further information:

https://www.kempmachines.com/agriculture/balecarrier? return=/agr iculture

	Types	Clamping range	Price
٧	BDE	Single version, mechanical	
		adjustable	€ 995,-
\checkmark	BDD	Double version, both sides hydraulic	
		adjustable	€ 2.150,-



(BSN) Bale Cutter

With the bale cutter, round bales up to 1,600 mm can be cut to be distributed in front of the feed fence or unloaded into the feed wagon.

- The net and film are held by a double clamping jaw.
- After opening the cutting frame, the clamp continues to hold the film and net until the cutting frame is above, allowing the net and film to be discharged after unpacking the bale.
- Equipped with 6 teeth of 50 mm thick and 8 coarse cutting blades for easy cutting even in tough grass.



- Equipped with 2 cylinders for stable and even cutting action.
- Pivot point equipped with heavy-duty shaft with Teflon bearings.
- Can be used with 1DW function.
- Weight ± 525 kg.
- standard equipped with attachment parts.

For further information:

	Types	Description	Price
\triangleright	BSN	Attachment parts excluded	€ 4.950,-



(BP) Bale spike

Bale spike for hay and bales of straw.

- The bale spike is equipped with three heavy teeth in welding bushes so that the spikes do not tear off the tube.
- The bale spike is standard delivered with a rack for several bales and a foldable safety rack.
- Light version (PBL): width 1500 mm, 1000 or 1.500 mm high, for build on mini loaders, light tractors and similar. Spike Ø 30 mm.
- Heavy version (BPZ): 1850 width and 1800 mm high, for mounting on wheel loaders, telehandlers, loaders and similar. Spike Ø 45 mm
- Working length 950 mm.
- Prices are without attachment parts.

For further information:

https://www.kempmachines.com/agriculture/balespike? return=/agriculture

	Types	Description	Price
٧	BPL1000	Light version width 1500 mm, height	
		1000 mm up to 800 kg.	€ 925,-
٧	BPL1500	Light version width 1.500 mm width,	
		height 1.500 mm, up to 800 kg	€ 1.100,-
V	BPZ1800	Heavy version width 1850 mm,	
		height 1800 mm, up to 1500 kg	€ 1.450,-

	Options	Description	Pr	ice
	options		•••	
\succ	EI	Extra welding bush	€	25,-
\checkmark	ETL	Extra spike light type	€	50,-
\checkmark	ETZ	Extra spike heavy type	€	80,-
\checkmark	BPH	Spike hydraulic folding	€	650,-
V	BPVR	Adjustable rack of 1.500 – 2.300, incl.		
		2 spikes (BPZ1800 only)	€	250,-





(STK) Straw Clamp

The Straw Clamp is designed to stack and move 3 or 4 large straw or hay bales together with a front loader, shovel or telehandler.

- Light version [STKS]: 1750 mm high and 1800 mm wide. With extendable side tube 2450 mm high. Suitable for: 2 bales of 90 cm high and 3 bales of 70 cm high. Equipped with 10 removable attachment parts that turn the bale. Weight: 480 kg.
- Heavy-duty version [STKL]: 2450 mm high and 1800 mm wide. Suitable for: 3 bales of 90 cm high and 4 bales of 70 cm high. Equipped with 14 removable attachment parts. Weight: 680 kg.
- The straw clamp is operated with 1 double-acting cylinder.
- Equipped with 14 hooks that rotate in the bale.
- 3 Conical weld-in bushings for mounting front loader tines, which can also be stored in the frame.

Advantages:

- All picked-up bales are clamped, by hooks rotating in the bale and pulling the bale against the frame.
- When the clamp is tilted forward, the bales remain suspended as the tines pull the straw ever more tightly against the frame when clamping.

For further information:

	Types	Description	Price
A	STKS	Straw clamp, including 3 removable teeth and removable attachment parts.	€ 3.300,-
	STKL	Straw clamp, including 3 removable teeth and removable attachment parts.	€ 3.825,-



(BBP) Roadside bale spike

- The roadside bale spike is specially made with a top clamp for roadside bales.
- The top clamp can close far enough to also clamp and take limp bales.
- The BBP1650 is standard equipped with ditch dirt bars, 1 top clamp and 6 teeth below.
- The BBP2300 is standard equipped with 2 top clamps and 6 teeth below.
- Can both be attached at the front or at the rear.
- This machine is standard equipped with three-point CAT2 take up.
- Weight 350 kg.

For further information:

	Types	Description	Price
\triangleright	BBP1650	Bermbalenprikker 1.650 mm breed	€ 3.150,-
\triangleright	BBP2300	Bermbalenprikker 2.300 mm breed	€ 3.150,-

	Opties	Description	Price
٧	BBPS	Equipped with extra bars for ditch	
		dirt. (BBP2300 only)	€ 200,-
V	вврн	Hydraulic folding teeth (BBP2300	€ 650,-
		only)	



(MS) Maize leveller

The **short fixed** version has integrated lift arm - and top link points to an extra short construction.

- Solid construction for intensive use.
- Weight 575 kg.

The swivel version can swivel 30 degrees to both sides.

- By constructing the turning point short on the three-point, the scraper can swivel from the wall, so you do not lock up yourself against the trench wall.
- Also, it makes it easier to push the corn to the side, without driving along the side.
- Weight 775 kg.

The following applies to both scrapers:

- Possible to mount a rubber strip and thus be used as a snow scraper.
- Slide plate 10 mm thick steel.
- Width 275 cm.
- Height 125 cm with see-through slots.
- Optional adjustable side shields for working width max .3500 mm.
- Prices are without attachment parts.

For further information:

https://www.kempmachines.com/agriculture/maizeleveller? return=/agriculture

	Types	Description	Price
\triangleright	MS	Short fixed design incl. CAT 2	€ 4.175,-
		construction	
\triangleright	MSZ	Swivelling version	€ 5.775,-

	Options	Description	Price
\triangleright	MSP	Fixed side plates	€ 375,-
\triangleright	MSVZ	Adjustable side plates up to 3500mm	€ 775,-



(SVL) Silage Fork light version

This allows fast distribution of the grass silage.

- Thick-walled tubes are used as teeth, which are placed and welded through the main beam.
- Weld-on parts for front loaders, shovels, telehandlers.
- Weight 425 kg.
- Price exclusive attachment parts.

Types	Description	Price
SVL2200	2.200 mm width with 6 teeth	€ 2.375,-
SVL2600	2.600 mm width met 7 teeth	€ 2.740,-
SVL3000	3.000 mm width met 8 teeth	€ 3.250,-

(SVZ) Silage Fork heavy version

- Teeth solid cut 60 mm wide, outer 100 mm wide.
- Teeth 1,600 mm long, height 1,800 mm, width 3,000 mm.
- Heavy-duty construction without moving parts.
- Weight ± 1,600 kg.

For further information:

	Types	Description	Price
\checkmark	SVZ	Price exclusive attachment parts	€ 7.425,-

	Options	Description	Price
\triangleright	SVZM	Maizestrip	Upon
			request

Other sizes on request.



(FRH) Film Roll Holder

The Film roll holder is developed for unrolling silage film. lengths of 100+ metres can be unrolled easily due to the bearing construction. Available in 2 types:

- The (FRHE) Film roll holder single. This type is equipped with 1 bar.
- The (FRH) Film roll holder. This type is equipped with 2 bars.

These are the advantages of the Film roll holder:

- Solidly built.
- Bearing-mounted design, allowing smooth unrolling.
- Film rolls up to 2,000 mm wide and 750 mm diameter.
- Detachable attachments.

For further information:

	Types	Description	Price
٧	FRHE	Single version (price is exclusive	€ 1.475,-
		attachment parts).	
٧	FRH	Double version (price is exclusive	€ 1.900,-
		attachment parts).	



(SK) Tube hitching system

The hitching system is:

- Quick connection and disconnection of the hose to the tank.
- Easy to assemble by means of 4 bolts and two hydraulic hoses on the place of the existing valve.
- Operating with one double-acting valve.
- Does not leak during transportation, due to the distance of the valve to seal rubber is minimal.
- No bends which also does not lose suction.
- Less weight as a suction arm.
- When ordering, specify whether the system will be mounted to the left or right of the tank. We recommend, if possible, to mount it on the right.

For further information:

https://www.kempmachines.com/agriculture/tube-hitchingsystem?_return=/agriculture

	Types	Description	Price
\checkmark	SK6	6" version; Complete with valve and	
		hose wagon and male coupling	
		(without 6" suction hose)	€ 2.400,-
\checkmark	SK8	8" version; Complete with valve and	
		hose wagon and male coupling	
		(without 8" suction hose)	€ 2.750,-

	Options	Description	Pr	ice
A	SK8-6	Male coupling with 6" hose adapter	€	150,-
A	KEG	Recommended mounting angle 20°, otherwise this wedge	€	120,-
~		0	-	,
	SK-KAR	Individual trolley with grommet and	€	450,-
		coupling		





(DSV) Deep litter rake

The deep litter rake is designed to push the top of litter under the box in the bedding of the cow. Hereby the lounge is smooth and softer, and the litter dries better thus reducing the risk of diseases. To scrape the litter back in the lounge, topping up is less needed to still keep sufficient litter in the box, resulting in litter savings.

- Designed to work with a mini shovel and scrape litter as a solid fraction, compost, chopped straw or sand surfaces in a floating box.
- The deep litter rake is usable to the left and the right side with one double-acting control valve, the rake is locked in the folded position and in working position and can be used pushing and pulling.
- Tilting is the tipping function of the shovel.
- There is also an option to mount a scraper to clean the grids or waiting room.
- While moving the rake can be adjusted in height and the slide continues to follow the ground.
- Width folded 1260mm, working width 2500mm from the centre shovel, in the box 1.500mm.
- Width vehicle max. 1.600mm
- Weight 230 kg.

For further information:

https://www.kempmachines.com/agriculture/deeplitterrake? return=/agriculture

	Types	Description	Price
A	DSV	Price is without attachment parts	€ 1.900,-

	Options	Description	Pri	ce	
\succ	DSVR	Rubber scraper, working width 1800	€	600,-	
For	For attachment narts see nages 61-65				



(DSVZ) Deep litter rake heavy

The DSVZ is designed for larger shovels, tractors, and telehandlers. This one has a heavier construction and the base is wider so that a wider vehicle can be linked.

- Width of vehicle max. 2400 mm.
- The rake part in the box is 1500 mm.
- Working width 2950mm from the centre shovel
- Weight 325 KG.

For further information:

https://www.kempmachines.com/agriculture/deeplitterrake? return=/agriculture

	Types	Description	Price
\triangleright	DSVZ	Price is without attachment parts	€ 2.225,-

Options	Description	Price
DSVZR	Rubber scraper, working width 2400	€ 750,-




(DSVA) Deep litter rake powered

- Can be used both left and right with 2 double-acting steering valves, If there is only one double-acting function present, a selection valve can be fitted.
- swiveling is done with the tilting function of the shovel.
- Available in a light version (DSVA) and a heavy version (DSVZA).
- The DSVA1000 and the DSVZA1000 have a working width of 1000 mm in the box.
- The DSVA1000 and the DSVZA1000 have a working width of 1000 mm in the box.
- Supplied with removable attachment parts as standard.

	Types	Description	Price
٧	DSVA1000	Light version, working width	€ 3.000,-
		1.000 mm in the box.	
٧	DSVA1350	Light version, working width	€ 3.050,-
		1.350 mm in the box.	
٧	DSVZA1000	Heavy version, working width	€ 3.325,-
		1.000 mm in the box.	
V	DSVZA1350	Heavy version, working width	€ 3.375,-
		1.350 mm in the box.	

For further information:

	Options	Description	Pri	ce
\triangleright	6/2	Electrical 6/2 hydraulic valve	€	350,-

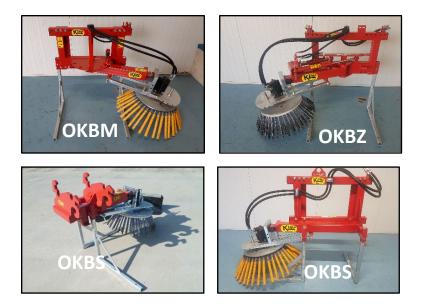

(OKB) Weed brush

The weed brush can be linked to the (mini)shovel, (mini)crane, tractors, spike, etc. as long as the minimum oil yield is 25 litres.

- By using a movable function with the pivot in front of the vehicle, there is a large swivel range possible. Actually 70 degrees to the left and the right, which ensures that the weed brush can move far besides the vehicle. This gives a good view on the brush.
- The weed brush is designed with an oscillating construction, which ensures that the brush follows the ground. Because of this, it is not necessary to correct the height by unevenness of +/- 15 cm. At the same



time, this allows the angle of the brush to be patched, by lifting or dropping the frame, for a more or less aggressive working.

- The diameter of the brush is 750 mm (Option 1000 mm).
- The brush can be operated with two hydraulic functions.
- Available with a brush of steel sheets or steel cable.
- Weight 200 kg.

For further information:

https://www.kempmachines.com/park/weed-brushes

	Types	Description	Price
A	OKBS	Fixed version	€ 1.680,-
٧	ОКВМ	Mechanical swivel version	€ 2.100,-
\checkmark	OKBZ	Hydraulic swivel version	€ 2.350,-

Options Weed brush



Edge knife: The edge cutter ensures that the edges, for example from a lawn, are cut tightly. The edging knife is equipped with an obstacle protection by means of a heavy spring.

Rubber flap: The rubber flap ensures that the weeds do not fly far away. The rubber flap can be adjusted in several positions.

Tilting 15 degrees: The option allows the machine to tilt the brush 15 deg.

	Options	Description	Price
\checkmark	OKBF	Movable rubber flap	€ 300,-
V	OKBVA800	Extended arm (800mm instead of	€ 75,-
		650mm)	
\triangleright	OKBVA1000	Extended arm (1000mm instead of	€ 100,-
		650mm)	
\triangleright	OKBKS	Edge knife	€ 1.850,-
\succ	OKBKM	Mechanical adjustment tilting	€ 500,-
\triangleright	ОКВКН	Hydraulic adjustment tilting	€ 600,-
V	OKB1000	Brush diameter 1000 mm, 44 bundles	
		steel cable (min. oil yield 30 litre).	
			€ 200,-
\triangleright	OKBNY1000	Brush diameter 1000 mm, 24	€ 275,-
		replaceable nylon parts (min. oil yield	
		30 litre).	
Ac	Advice by intensive use:		
\triangleright	DL	Return flow connection	€ 75,-
\succ	ОКВО	Pressure relief valve	€ 125,-

Options for operating the brush

	Options	Description	Price
V	OKBE	Electric use of turning and swivelling the	
		brush with 1 function	€ 600,-
\checkmark	OKBEE	Electric use of turning, swivelling and	
		tilting the brush	€ 850,-
\checkmark	OKB3XE	Electric use of turning, swivelling, tilting	
		the brush and the edge knife	€ 1.100,-
\checkmark	ОКВЈ	Joystick with magnetic base and cable	
		for operating	€ 250,-

Brushes



	Options	Description	Pr	ice
٨	LBHKG	750mm with 76 bundles steel sheets	€	200,-
٨	LBSTK750	750mm with 36 bundles steel cable	€	190,-
٨	LBSTK1000	1000mm with 44 bundles steel cable	€	275,-
٨	LBNY750	750mm	€	150,-
٧	LBNYV750	750 mm with 20 replaceable nylon	€	250,-
		parts		
٧	LBNY1000	1000mm with 24 replaceable nylon		
		parts	€	350,-
٧	LPNYV	Replaceable nylon parts for		
		LBNY1000 and LBNYV750	€	5,50

For ordering these brushes, see the link below: <u>https://www.kempmachines.com/weed-brushes</u>



(OKBD) Weed brush Duo

The double weed brush can be connected to (mini) loaders, (mini) excavator, tractor, forklift, as long as the minimum oil yield is 40L and the machine is equipped with a non-pressurized return.

The advantage of a double brush is that a larger surface can be brushed at the same time. The brushes have the same direction of rotation so that the dirt is drained on one side. A second advantage is that two brushes adapt better to uneven surfaces than one large brush, because both can oscillate independently.

- The weed brush is designed with an oscillating construction, so that the brush is ground-following, therefore it is not necessary to correct the height for irregularities of +/- 15 cm. At the same time, the angle of the brush can be adjusted by lifting the frame or lowering it for a more or less aggressive effect.
- The double weed brush is available as a fixed or hydraulically pivoting version. By using a hydraulic swivel function with the pivot point against the vehicle, a large swivel range is possible, namely 70 degrees to the left and to the right, so that the weed brush can reach far next to the vehicle and thus there is also a good view on the brush.
- The diameter of the brushes are 750 mm. Available with a brush made of sheet steel or steel cable.
- The brush can be operated with two hydraulic functions.
- Weight ± 300 kg

For further information:

https://www.kempmachines.com/park/weed-brushes/double-weedbrush?_return=/park/weed-brushes

	Types	Description	Price
\succ	OKBSD	Fixed version	€ 3.250,-
\triangleright	OKBZD	Hydraulic swivel version	€ 3.750,-

	Options	Description	Pr	ice	
\checkmark	OKBF	Movable rubber flap	€	300,-	
V	OKBE	Electric use of turning and swivelling			
		with 1 function	€	600,-	
V	ОКВЈ	Joystick with magnetic base and cable	€	250,-	
V	OKBD1000	Brush 1000 mm, 44 bundles steel cable	€	400,-	



(OKBT) Weed brush Triple

The triple weed brush can be connected to (mini) loaders, (mini) excavator, tractor, forklift, etc. as long as the minimum oil yield is 60 liters and the machine is equipped with a non-pressurized return. With this machine, large surfaces can be brushed faster thanks to the large working width. The brushes have the same direction of rotation so that the dirt is drained to one side.

The weed brush triple is available as a fixed or hydraulically swivelling version. By using a hydraulic swivel function with the pivot point against the vehicle, a large swivel range is possible, namely 70 degrees to the left and to the right, so that the weed brush can reach far next to the vehicle and thus there is also a good view on the brush. In case of serious contamination, there is the possibility to swivel as much as possible so that brushes, brush together in a row. The fixed version is suitable for an excavator with turn-tilt head.

The diameter of the brushes are 750 mm.

A third advantage is that three brushes adapt better to uneven surfaces than one large brush, because all can oscillate independently. The maximum working width of the triple version is 2,225 mm.

For further information:

https://www.kempmachines.com/park/weed-brushes/triple-weedbrush/triple-weed-brush? return=/park/weed-brushes/triple-weedbrush

	Types	Description	Price
	OKBST	Fixed version	€ 4.750,-
\triangleright	OKBZT	Hydraulic swivel version	€ 5.550,-

	Options	Description	Pri	ice
\triangleright	OKBF	Movable rubber flap	€	300,-
\triangleright	OKBE	Electric use of turning and swivelling		
		with 1 function	€	600,-
\checkmark	ОКВЈ	Joystick with magnetic base and		
		cable	€	250,-



(SRS) Stone fork

Ideal to get out of bricks or tiles.

- Teeth C.T.C. 80 mm, so that no stones can fall through.
- To deliver to mini loader or mini crane.
- Equipped with removable mounting part as standard, except attachments for excavators (these are welded to the stonework).
- Standard length ± 900 mm.

For further information:

	Types	Description	Price
٨	SRS1200	1.200 mm width with 15 spikes	€ 1.250,-
V	SRS1300	1.300 mm width with 16 spikes	€ 1.295,-
V	SRS1500	1.500 mm width with 19 spikes	€ 1.450,-
\checkmark	SRS1750	Heavier version:	
		1.750 mm width with 22 spikes	€ 1.895,-
V	SRS2000	Heavier version:	
		2.000 mm width with 25 spikes	€ 2.150,-

	Options	Description	Price
\triangleright	SRSTH	Outer spikes higher placed next to	
		the frame for stability lying of the	
		outer stone	€ 100,-



(ADAPTE) Adapter Attachment > Euro

Adapter from any attachment to Euro connection.

	Types	Description	Pri	ce
\triangleright	ADAPTE	Euro (excl. Attachment parts)	€	850,-

For **attachment parts** see pages 61-65, for further information, see the link at the bottom of the pages.



(ADAPT3) Adapter Attachment > CAT-2

Adapter from any attachment to CAT-2 connection. This adapt is standard equipped with removable hooks.

For further information:

kempmachines.com

	Types	Description	Pri	ce
٧	ADAPT3	3-point CAT-2	€	950,-
		(excl. Attachment parts)		

	Options	Description	Price
\triangleright	ADAPTCAT3	CAT-3	€ 100,-
\triangleright		Pin-cone	€ 150,-
\triangleright		Hitch	€ 150,-





(ADAPT) Attachment > Attachment

Adapter from any attachment to another attachment of your choice.

- Both with mechanical locking.
- Price exclusive attachment parts.

For further information:

kempmachines.com

	Types	Description	Target Price
	ADAPTL light	Shovels to 4.000 kg	€ 1.050,-
\triangleright	ADAPTZ heavy	Shovels to 8.000 kg	€ 1.350,-



(MT) Machine Transporter

Suitable for moving implements, the machine transporter can be attached to your shovel, telehandler or tractor.

For further information:

	Types	Description	Price
7	MT	Exclusive attachment parts Included K50 hitch	€ 850,-
A	MTL	Exclusive attachment parts Inclusive pull pin and pick-up mandrel	€ 1.275,-
A	MTV	Exclusive attachment parts Inclusive K50 hitch, Cat 1-2 catching hooks	€ 1.350,-

Options	Description	Price
K80	K80 hitch (MTL only)	€ 175,-



(MTLI) Machine Transporter forklift receiver

Suitable for moving implements, the machine transporter can be attached to your shovel, telehandler or tractor.

For further information:

	Types	Description	Price
\checkmark	MTLI	Including forklift receiver 200*80*6	€ 900,-
		Included K50 hitch	
\checkmark	MTLIV	Including forklift 200*80*6	€ 1.350,-
		Including K50 hitch, cat 1-2 catch	
		hooks	
\checkmark	MTLIL	Including forklift receiver 200*100*8	€ 1.150,-

Options Description		Price
K80	K80 kogel (alleen bij MTLIL)	€ 175,-

Rubbers

Nylon inlay	Sizes	Price
RUBR1444	40 x 400 x 1.400 mm	€ 145,-
RUBR1844	40 x 400 x 1.800 mm	€ 170,-
RUBR2244	40 x 400 x 2.200 mm	€ 190,-
RUBR2544	40 x 400 x 2.500 mm	€ 220,-
RUBR2555	50 x 500 x 2.500 mm	€ 330,-
RUBR2844	40 x 400 x 2.800 mm	€ 240,-
RUBR2855	50 x 500 x 2.800 mm	€ 365,-
RUBR3244	40 x 400 x 3.200 mm	€ 275,-
RUBR3255	50 x 500 x 3.200 mm	€ 425,-
RUBR3455	50 x 500 x 3.400 mm	€ 450,-
RUBR3855	50 x 500 x 3.800 mm	€ 495,-
ROL44	Role of 400 x 40, any length possible	€ 95,-/mtr
ROL55	Role of 500 x 50, any length possible	€ 135,-/mtr
RUBR244	Rubber support leg 40 x 400 x 160 mm	€ 25,-
RUBR255	Rubber support leg 50 x 500 x 200 mm	€ 30,-
Steel inlay	(is used as a conveyor belt, minor	Price
	damage possible)	
RUBS1443	32 x 400 x 1.400 mm	€ 180,-
RUBS1843	32 x 400 x 1.800 mm	€ 200,-
RUBS1853	32 x 500 x 1.800 mm	€ 250,-
RUBS2243	32 x 400 x 2.200 mm	€ 230,-
RUBS2253	32 x 500 x 2.200 mm	€ 290,-
RUBS2543	32 x 400 x 2.500 mm	€ 240,-
RUBS2553	32 x 500 x 2.500 mm	€ 320,-
RUBS2743	32 x 400 x 2.700 mm	€ 265,-
RUBS2753	32 x 500 x 2.700 mm	€ 350,-
RUBS3043	38 x 400 x 3.000 mm	€ 310,-
RUBS3053	38 x 500 x 3.000 mm	€ 400,-
RUBS3243	38 x 400 x 3.200 mm (in 2 parts)	€ 380,-
RUBS3253	38 x 500 x 3.200 mm (in 2 parts)	€ 475,-
RUBS3455	50 x 500 x 3.400 mm (with steel net)	€ 550,-
RUBS3855	50 x 500 x 3.800 mm (with steel net)	€ 625,-
ROL43	Role of 400 x 40, any length possible	€ 115,-/mtr
	incl. Strips and bolts	Price
140*140*6	Up to 2.500 mm (excl. rubber)	€ 340,-
140*140*6	Up to 3.200 mm (excl. rubber)	€ 425,-

The 500-mm-high rubbers are supplied with 2 rows of holes, so it can be adjusted 4 times and therefore worn further.

Shipping costs rubbers till 2.200 mm € 55,-, above 2.200 mm € 70,-

Attachment parts

Please check the drawings when ordering, see: https://www.kempmachines.com/attachment-parts



Description	Price
Set of loose plates short	€ 100,- Excl.
- 490 mm long, 12 mm thick, 2 rows of holes	attachments
Set of loose plates long	€ 125,- Excl.
- 740 mm long, 12 mm thick, 3-4 rows of holes	attachments

When ordering removable attachment plates only, we charge the set of plates and the attachment parts (welded and painted)

Types	Tractor/ Front end loa	der	
ATA1	Accord Horticulture	Others on request	€ 225,-
ATA2	Accord Cat 0		€ 225,-
ATA3	Accord Cat 1/2/3		€ 250,-
ATAL	Alö quicke		€ 200,-
ATDT	3-Point Horticulture		€ 200,-
ATD0	3-Point Cat 0		€ 200,-
ATD1	3-Point Cat 1		€ 200,-
ATD2	3-Point Cat 2		€ 200,-
ATD3	3-Point Cat 3		€ 225,-
ATD4	3-Point Cat 4	Specify high or low	Upon
			request
ATEU1	Euro		€ 100,-
ATF1	Faucheux		€ 250,-
ATM1	MX (Mailleux)		€ 225,-
ATTR	Trima		€ 200,-
ATVE	Veto		€ 200,-

Attachment parts (welded or mounted on the machine):

Please check the drawings when ordering, see: https://www.kempmachines.com/attachment-parts

Types	Minishovels/ Skid steer loader		
AAT1	Atlas 32		€ 200,-
AAV1	Avant		€ 200,-
ABO2	Bobcat		€ 200,-

AEV1	Everun	780 intermediate size	€ 225,-
AFU1	Fuchs (hook)		€ 225,-
AFU2	Fuchs (plate)		€ 225,-
AGA1	Gamma		€ 200,-
AGE1	Gehl		€ 200,-
AGE2	Gehl		€ 200,-
AGI1	Giant	562 intermediate size	€ 200,-
AGI1B	Giant	Attachments forwards	€ 250,-
		(stone fork)	
AGI2	Giant	802 intermediate size	€ 200,-
AIN1	Intrac	Euro system width or	
		small	€ 100,-
AJC4	JCB 403	Hollow sections frame	€ 225,-
AJC5	JCB 403	Hook (662 between)	€ 200,-
AWE1	Job man	See Weidemann	€ 200,-
AKN1	Knikmops	К90	€ 200,-
AKN2	Knikmops	K130	€ 200,-
AKN3	Knikmops	Hook K250	€ 200,-
AKR1	Kramer	Type 180/250/350	€ 200,-
AKU1	Kubota		€225,-
AKU2	Kubota		€225,-
AMK1	Macks	Haken	€ 275,-
AMK2	Macks	Hollow sections frame	€ 275,-
AMO1	Multi-One		€ 200,-
AMU1	Mustang	Plate 900mm	€ 200,-
AMU2	Mustang	Plate 1138mm	€ 200,-
AMU3	Mustang	Hook	€ 200,-
ANO1	Norcar	Avant attachment	€ 200,-
API1	Pitbull	Giant attachment	€ 200,-
ASA1	Sauerburger		€ 200,-
ASC2	Schäffer hook	2000/3000 series	€ 225,-
ASC1	Schäffer Hollow	520 of 620	€ 225,-
	sections		
ASP1	Sherpa	(specify type)	€ 300,-
ASK1	Steko		€ 300,-
AST1	Striegel		€ 250,-
ATH1	Thaler		€ 250,-
AWE1	Weideman (hook)		€ 200,-
AWE3	Weideman (plate)		€ 250,-

Please check the drawings when ordering, see: <u>https://www.kempmachines.com/attachment-parts</u>

Types	Shovel		
AAH1	Ahlmann		€ 225,-
AAH2	Ahlmann		€ 225,-
AAH3	Ahlmann		€ 250,-
AAH4	Ahlmann		€ 350,-
AAT2	Atlas	945 / hoh 310	€ 225,-
AAT3	Atlas	945 / 845 / hoh 500	€ 300,-

ACA2	Catterpillar		€ 250,-
ACA2	Catterpillar		€ 225,-
AHI1	Hitachi	860 intermediate size	€ 250,-
AJC6	JCB	648 intermediate size	€ 250,-
AJC0 AJC7	JCB	860 intermediate size	€ 250,- € 250,-
AJC7	JCB	970 intermediate size	€ 250,- € 350,-
AKO1	Komatsu		€ 250,-
AKR2	Kramer		€ 250,-
ALI1	Liebherr		€ 250,-
ALI2	Liebherr		€ 350,-
AMC1	Mecalac		€-
	O en K	On request	€-
	Pallazzani	On request	€-
APA1	Paus		€ 300,-
ASC3	Schäffer	760 intermediate size	€ 250,-
ASC4	Schäffer	860 intermediate size	€ 250,-
ASH1	Schaeff	Ø 35 top and bottom	€ 250,-
ASH2	Schaeff	Ø 50 top and bottom	€ 300,-
ASH3	Schaeff	Ø 50 top and 60 bottom	€ 350,-
ATE2	Terex	Ø 35 top and bottom	€ 250,-
ATE3	Terex	Ø 50 top and bottom	€ 300,-
ATE4	Terex	Ø 50 top and 60 bottom	€ 350,-
AVE1	Veneri		€ 300,-
AVE2	Veneri		€ 300,-
AVO1	Volvo	648 intermediate size	€ 250,-
AVO2	Volvo	860 intermediate size	€ 250,-
AVO2B	Volvo	Attachment backwards	€ 250,-
		(bale clamp)	
AVO3	Volvo	Hoh 436 mm	€ 300,-
AVO4	Volvo	970 between / hoh 618	€ 350,-
AVO5	Volvo	1000 between / hoh 780	€ 500,-
AWD1	WD 2000	Class 5-6	€ 500,-
AWD2	WD 2000	Class 7-8	€ 600,-
AWE2	Weideman Groot		€ 425,-
AWR1	Werklust		€ 450,-

Please check the drawings when ordering, see: https://www.kempmachines.com/attachment-parts

Types	Telehandler	
ABO1	Bobcat	€ 350,-
ACA1	Catterpillar TH	€ 350,-
ACL1	Claas	€ 350,-
ADE1	Deutz	€ 350,-
ADI1	Dieci	€ 350,-
ADI2	Dieci	€ 350,-
AJC1	JCB quickhitch	€ 275,-
AJC2	JCB Tool Carrier	€ 275,-
AJC3	JCB Q-Fit	€ 350,-
ADE1	JLG Deutz-Fahr	€ 350,-

AJO1	John Deere		€ 350,-
AKR3	Kramer		€ 350,-
AMA1	Manitou	Tube	€ 350,-
AMA2	Manitou	Pin-cone	€ 350,-
AMB1	Matbro	Picking beam / Pin-	€ 350,-
		cone	
AME1	Merlo ZM1		€ 250,-
AME2	Merlo ZM2		€ 250,-
	Removable attachments	Extra price €100,-	
AME3	Merlo ZM3		€ 300,-
	Removable attachments	Extra price €100,-	
ANE1	New holland		€ 300,-
ATE1	Terex		€ 300,-

Types	Excavator		
CW-B05	CW 0/ 05 Bucket		€ 200,-
CW-H05	CW 0/ 05 Hamer		€ 200,-
CW-T05	CW 0/ 05 Twin		€ 225,-
CW-B10	CW 10 Bucket		€ 200,-
CW-H10	CW 10 Hamer		€ 200,-
CW-T10	CW 10 Twin		€ 250,-
CW-B20/30	CW 20/ 30 Bucket		€ 375,-
CW-H20/30-1	CW 20/ 30 Hamer		€ 300,-
CW-H20/30-2	CW 20/ 30 Hamer		€ 375,-
CW-H20/30-3	CW 20/ 30 Hamer		€ 375,-
CW-T20/30	CW 2/ 3 Twin		€ 500,-
CW-20/30 B	CW 2/ 3 45 degrees	(Bale clamp)	€ 575,-
AEN45	Engcon S45	Other types on	€ 300,-
		request	
AEN60	Engcon S60	Other types on	
		request	€ 350,-

Please check the drawings when ordering, see: https://www.kempmachines.com/attachment-parts

Types	Fork lift truck	
AFE2	Attachment parts forklift plate FEM II	€ 250,-
AFE3	FE3 Attachment parts forklift plate FEM III	
AHK1	Hollow sections for lift forks 160 x 80 x 6 mm	€ 175,-
AHK2	AHK2 Hollow sections for lift forks 200 x 80 x 6 mm	
AHK3	Hollow sections for lift forks 200 x 100 x 8 mm	

